




Index	2	Installation	4	Programming table	6
Safety information	2	Programming	5	Lens index	7
Content	2	Wireless DMX	5	Lens replacement	7
Technical	3	Bluetooth by Casambi	6	List of symbols	8
Specifications	3				




SAFETY INFORMATION

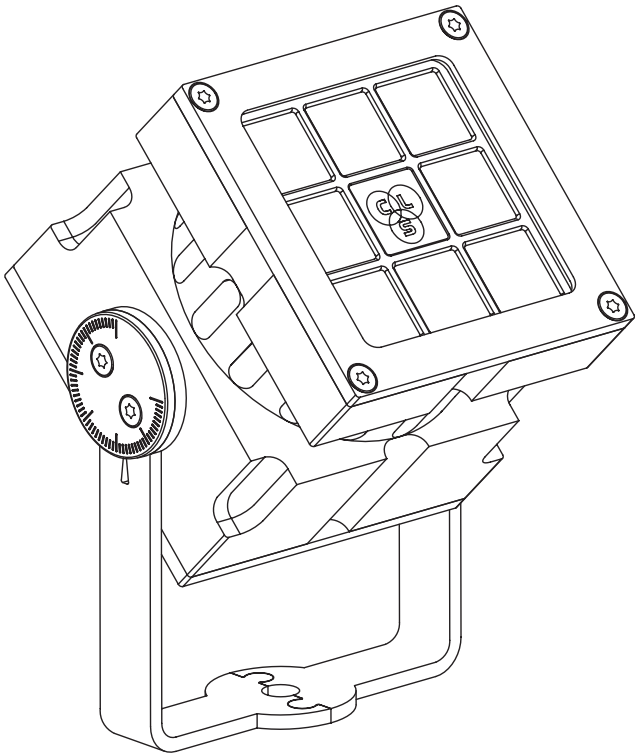


Do not touch the LED surface




No open flames




Do not stare into the LED




Ambiance
Max. 40°




Qualified technician




Disconnect the power supply before installing or maintaining




Make sure all connectors are connected properly




Use a source of AC power that complies to local electrical codes




Block access below the work area when maintaining the unit



Don't modify or install genuine parts on this product






Don't install in a flammable or explosive area




Warning!
Some surfaces can be hot

CONTENT

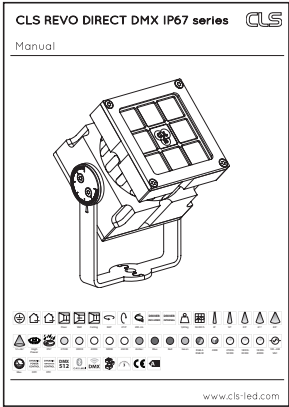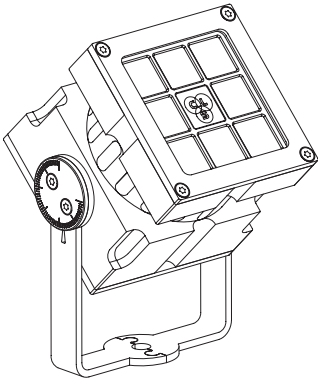





12 x 46°




High Power




IP67




2700K




3000K




4000K




5000K




6500K




Amber




Blue




Red




Green




RGB-A
RGB-W




AWB




2700K-
5000K




1800K-
3000K




1800K-
4000K




100-240
VAC




Max.
20 Watt




DPC




DTC




DMX
512




CASAMBI
DMX



3 Year
Warranty




CE




A

TECHNICAL

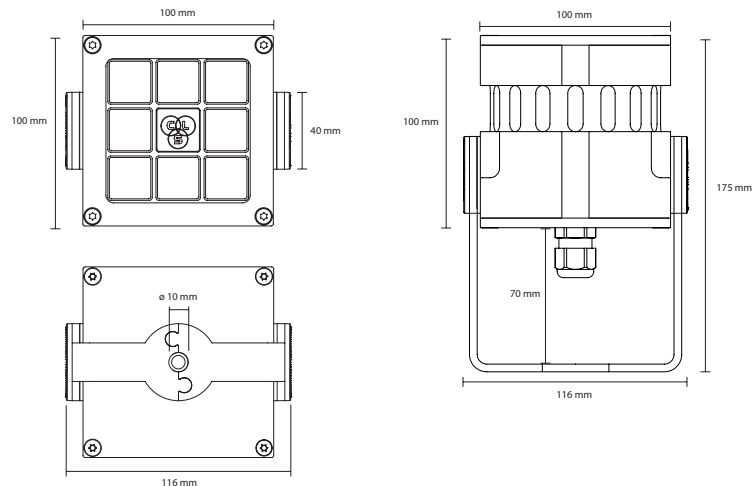

Tools

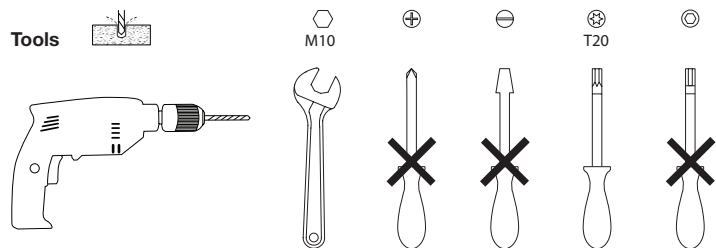



SPECIFICATIONS

LED:	High Power LED
Single colours:	2700K, 3000K, 4000K & 5000K, 6500K, amber, royal blue, green & red
Colour changing:	RGBA, RGBW & AWB
Tunable White:	2700K-5000K, 1800K-3000K & 1800K-4000K
Lenses:	8°, 12°, 30°, 61°, 80° and 12x46°
Power supply:	100 ~ 240 VAC
Power consumption:	Max. 20 Watt
Housing:	Anodised aluminium
Weight:	1,8 kg
IP value:	IP67
Cable length:	200 cm
Measurements:	175 x 116 x 100 mm (h x w x d)
Ambient temperature:	-30° C till +50° C

ACCESSORIES

110415	CLS Revo lens kit 8° 8 pcs of lenses
110425	CLS Revo lens kit 12° 8 pcs of lenses
110435	CLS Revo lens kit 30° 8 pcs of lenses
110445	CLS Revo lens kit 61° 8 pcs of lenses
110455	CLS Revo lens kit 12x46° 8 pcs of lenses
105069	CLS groundpin black, 20 cm
105070	CLS extension rod black, 20 cm
122200	CLS D-Ta DMX tester/addresser unit
Y110790-G	Revo Snoot grey
Y110790-B	Revo Snoot black
Y110776	CLS Power/DMX combi cable outdoor (per meter)
Y110777	CLS Power / DMX combi cable outdoor 100 meters
Y106017	CLS Magnet pin (5 pcs)

INSTALLATION

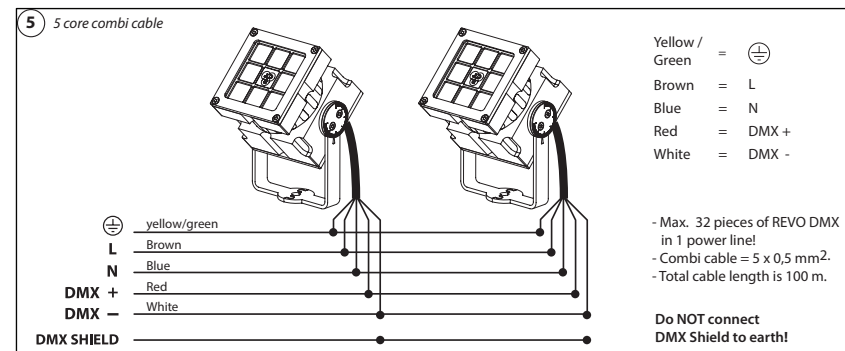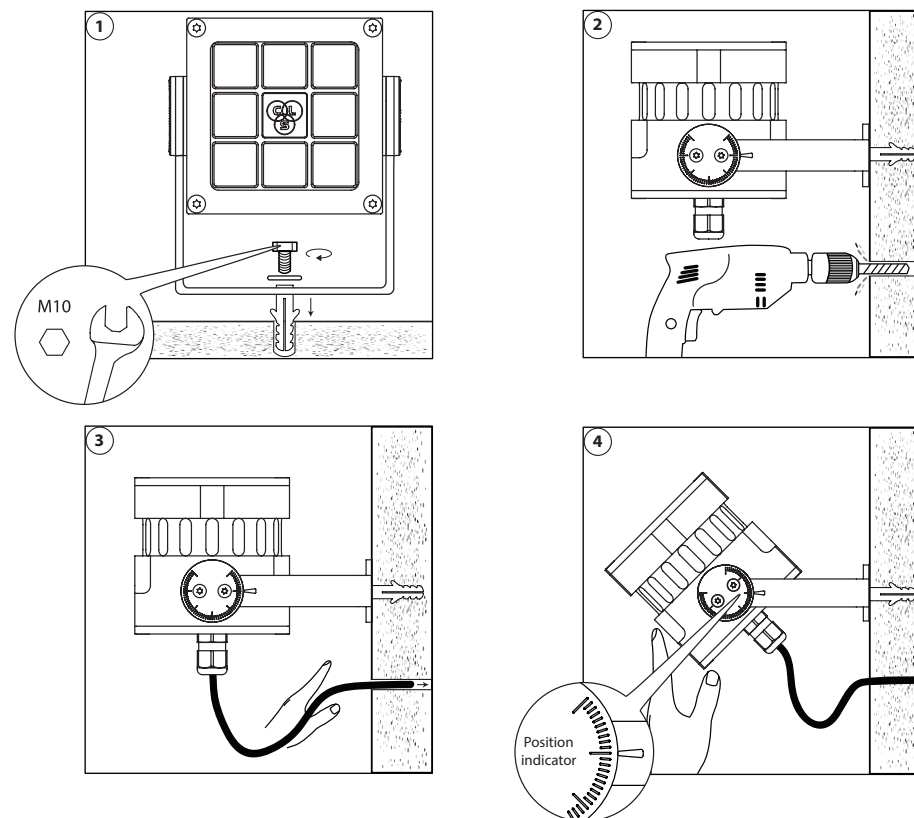


PROGRAMMING

All settings can be configured via DMX. Settings can be configured at once or separately. When one or a couple settings needs to be changed just leave all other setting values zero. This keeps those settings unchanged. Please check the table for more information.

Always use a DMX controller with digital interface. If not available, you can purchase the CLS D-ta DMX addresser unit (#122200).

First make sure to set the DATA on the DMX controller. To program the setting into the LED fixture follow the next steps.

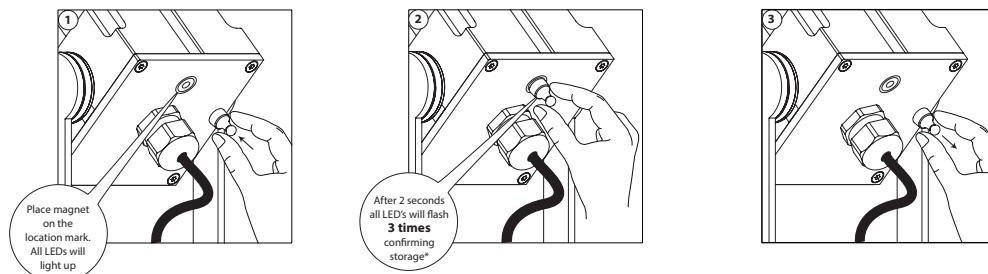

* If all LEDs flash **10 times**, something went wrong. Please try again. If the problem continues to occur, please contact your local sales distributor.

WIRELESS DMX

See the Manual of Wireless Solutions. The Manual can be found on our CLS website, in the Downloads section. Or use the link below <https://www.cls-led.com/wp-content/uploads/cls-files/W-DMX-manual.pdf>

Unlink procedure

When the fixture does not receive a DMX signal (DMX controller off), place the magnet on the bottom of the fixture for 5 seconds. Slow flash indicates that the fixture is unlinked.

BLUETOOTH BY CASAMBI






For Casambi controlled fixtures, see the manual of Casambi. The Manual can be found on our CLS website, in the Downloads section. Or use the link below: https://www.cls-led.com/wp-content/uploads/cls-products/CLS_CASAMBI/MANUAL/Manual_Casambi_controlsistem_EN.pdf

PROGRAMMING TABLE

PROGRAMMING TABLE				
DMX	Function	Data	Parameters	Description
CH1	Set address 001 to 255	0 1...255	0 = no change DMX address = 1...255	Use this DMX channel to set address from 1 to 255. (DMX address is called "n")
CH2	Set address 256 to 508	0 1...255	no change DMX address = 256...508	Use this DMX channel to set address from 256 to 508. (DMX address is called "n")
CH3	Static behavior	0 1 2 3	no change last DMX value output off load static values	If no DMX is present the fixture will respond like set in this function.
CH4	Soft dim	0 1 2 3-250	no change off Dynamic Fixed interpolation delay	When dynamic softdim is activated an extra DMX channel behind the colours and/or master controls the soft dim reaction. If fixed no extra DMX channel is used.
CH5	Master control	0 1 2 3	no change no master used master is first channel master is last channel	If master is first channel is selected the channel will be DMX channel "n". If master is last channel is selected the channel will be "n+x" ("x" is calculated in the output patch).
CH6	Output 1 patch	0 1 2 3 4	no change DMX channel n DMX channel n+1 DMX channel n+2 DMX channel n+3	Each output channel can be patched to respond to the desired DMX channel. This enables the user to mix up the colours according to the controller that is used.
CH7	Output 2 patch	0 1 2 3 4	no change DMX channel n DMX channel n+1 DMX channel n+2 DMX channel n+3	Example: all outputs are patched as 1 All outputs will be controlled by DMX channel "n". If master is used total DMX channels will be 2 otherwise it uses 1 channel ("x" = 1).
CH8	Output 3 patch	0 1 2 3 4	no change DMX channel n DMX channel n+1 DMX channel n+2 DMX channel n+3	Example: output 1&2 are patched as 1 and 3&4 are patched as 2 Output 1 & 2 will be controlled by DMX channel "n". Output 3 & 4 will be controlled by DMX channel "n+1". If master is used total DMX channels will be 3 otherwise it uses 2 channels ("x" = 2).
CH9	Output 4 patch	0 1 2 3 4	no change DMX channel n DMX channel n+1 DMX channel n+2 DMX channel n+3	
CH10	Static output 1	0 1 2...255	no change output off intensity 2...255	Each output channel can be set to a static intensity.
CH11	Static output 2	0 1 2...255	no change output off intensity 2...255	If no DMX is present and Static behavior is set to "load static values". The outputs will be set to the configured intensity values.
CH12	Static output 3	0 1 2...255	no change output off intensity 2...255	
CH13	Static output 4	0 1 2...255	no change output off intensity 2...255	
CH14	Load default settings	0 1	no change Load Factory settings.	This function resets all settings to the Factory setting.

LED colour	Number of DMX channels needed			
	1	2	3	4
Single colour	✓			
Tunable White		✓		
ColourFlow				✓

LENS INDEX & REPLACEMENT

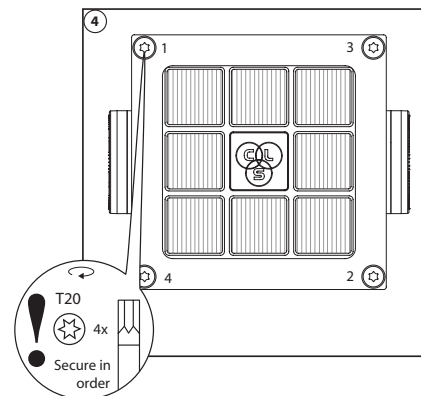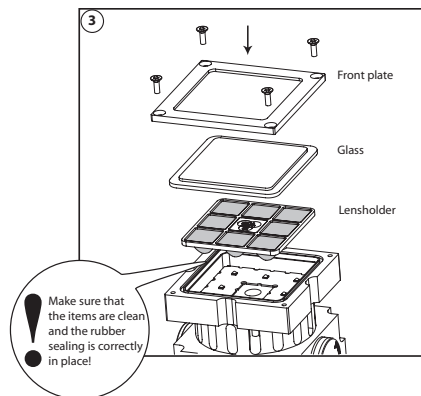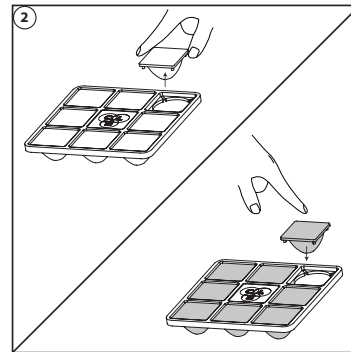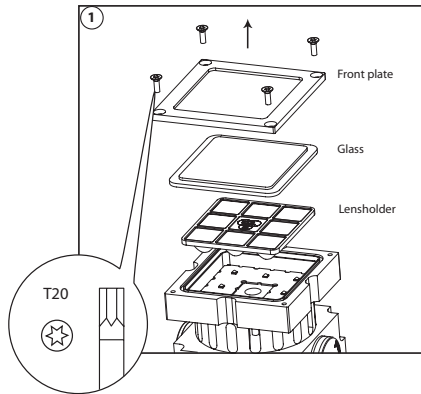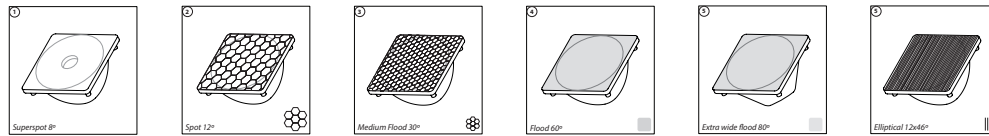

2023 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf

LIST OF SYMBOLS

	Protection class One, two or three		Retail & Food LED modules Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.
	Application area Indoor or outdoor		Colour Available colours: Amber, blue, red or green
	Application area Floor, wall or ceiling		White colour temperature In different Kelvin values: Cold white, neutral white, warm white or extra warm white
	Swivel Fixture is horizontally rotatable, indicated in degrees		Curve Minimal bending curve in centimeters
	Swivel Fixture is vertically rotatable, indicated in degrees		Cutting length Indicated by the cutting marks
	Multiple connection Daisychain connectivity		LED pitch Pitch between the LEDs in millimeters
	Installation depth In centimeters		Power supply In VDC, VAC or milliAmpere
	Installation size In centimeters		Power consumption In VA or Watt
	Cable length Maximum cable attached to the fixture in centimeters		Dimmable 1-10 Volt, Phase, individual, DMX dimmable or DALI
	Driver Inclusive or exclusive Internal or external		PWM dimming Traditional PWM dimming, DMX analog or DMX Hybrid dim
	Weight In grams/kilograms		Bluetooth controlled By Casambi
	Pressure Maximum pressure on the fixture in kg/cm²		Magneto dimming Accurate dimming from 100 - 1% by using a magnet
	Lifespan Of the light source in hours		Dynamic Control Dynamic Power Control or Dynamic Temperature Control
	Lenses Available lenses, indicated in degrees		DMX input Fixture works on DMX512 protocol or Wireless DMX
	Performance Zoom Adjustable beam angle		Combined product Compose your own fixture
	LEDs Kind of LED used in the fixture		Warranty 3 or 5 years warranty on the product
	Plug & play Easy connection using the SmartConnect system		Conformité Européenne CE marking for free marketability of industrial goods within the EU
	IP value Ingress Protection classifies the degrees of protection provided against the intrusion of the product		Energy label
	Colour changing RGB, RGB-W, RGB-A, AWB or Tunable White		Lightsource Equipped with a CLS, Bridgelux or Xicato LED module