






Index	2	Installation Global adapter	4	Wireless DMX	7
Safety information	2	Installation Eutrac adapter	5	Bluetooth by Casambi	7
Content	2	Lens replacement	6	Programming table	8
Technical	3	Lens index	6	Accessories	9
Specifications	3	Programming	7	List of symbols	10

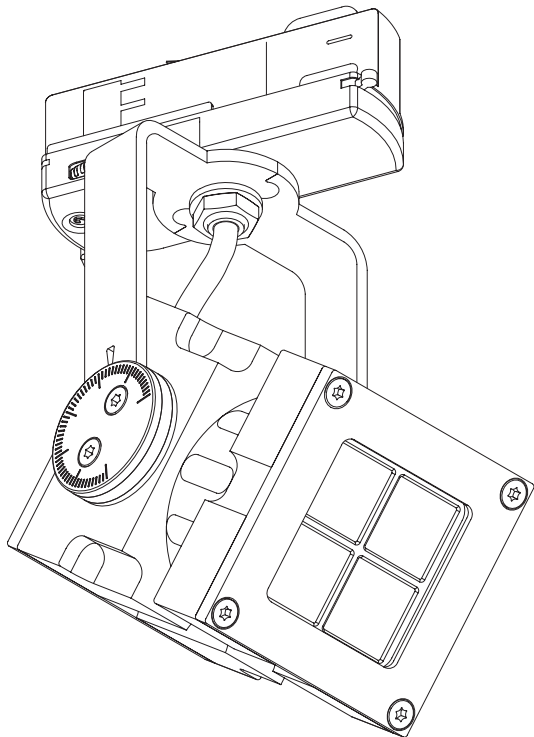


SAFETY INFORMATION




Make sure all connectors are connected properly




Use a source of AC power that complies to local electrical codes




Block access below the work area when maintaining the unit




Don't modify or install genuine parts on this product




Don't install in a flammable or explosive area




Warning! Some surfaces can be hot




Qualified technician



Disconnect the power supply before installing or maintaining






Ambiance Max. 40°




Do not stare into the LED

CONTENT

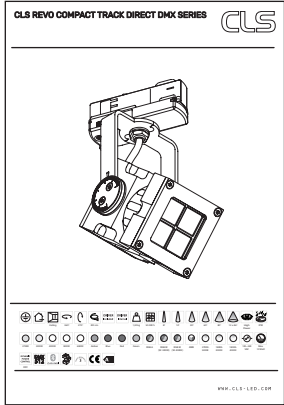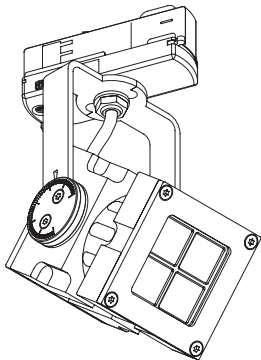





Ceiling




360°




270°




200 cm




DRIVER Included




DRIVER Internal




1.30 kg




50,000 h




8°




12°




30°




60°




80°




12 x 46°




High Power




IP20




2700K




3000K




4000K




5000K




6500K




Amber




Blue




Red




Green




RGB-A




RGB-W (W: 3000K)




RGB-W (W: 4000K)




AWW




2700K-5000K




1800K-3000K




1800K-4000K




100-240 VAC




Max. 10 Watt




DYNAMIC POWER CONTROL




DMX 512




CAS-MBI





3 Year Warranty



CE




A

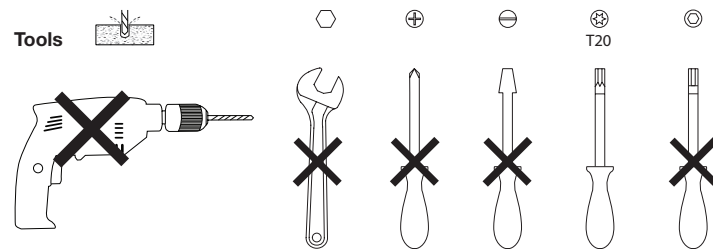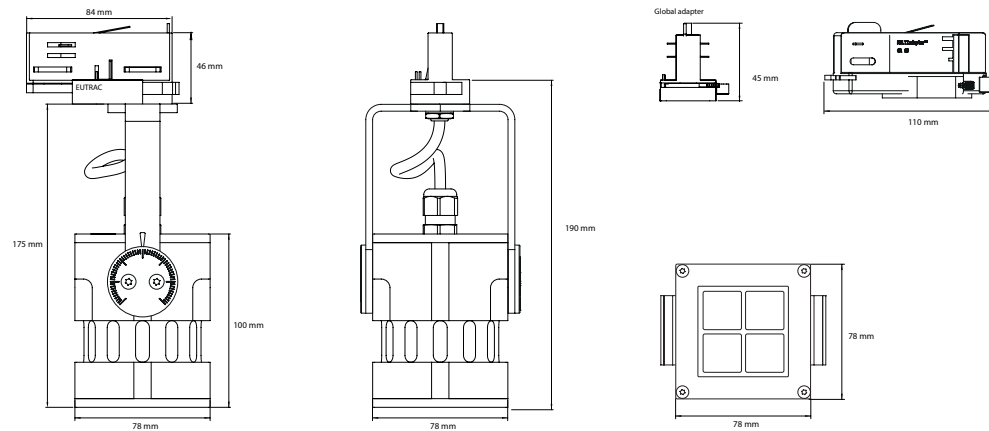







SPECIFICATIONS

LED:	4 x High Power LED
Single colours:	2700K, 3000K, 4000K, 5000K, 6500K, amber, royal blue, green & red
Colour changing	RGBA, RGBW (w: 3000K), RGBW (w: 4000K) & AWB
Tunable White:	2700K-5000K, 1800K-3000K & 1800K-4000K
Lenses:	8°, 12°, 30°, 60°, 80° and 12x46°
Power supply:	100 ~ 240 VAC
Power consumption:	Max. 10 Watt
Housing:	Blank or black anodised aluminum
Weight:	1,3 kg
IP value:	IP20
Measurements:	175 x 78 x 78 mm (hwxwd)
Ambient temperature:	-30° C till +40° C




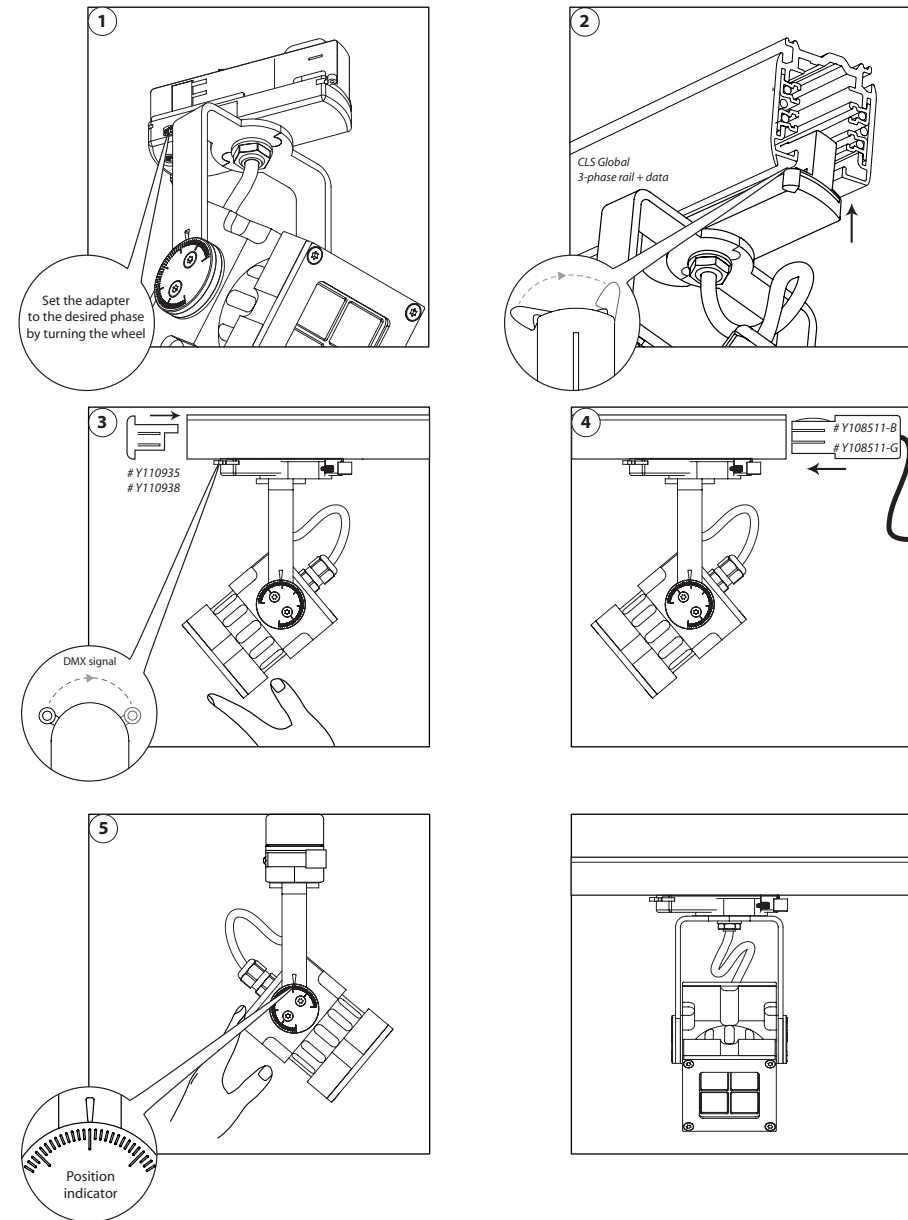


INSTALLATION






With Eutrac adapter

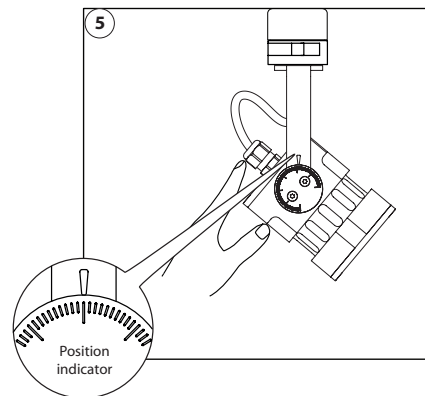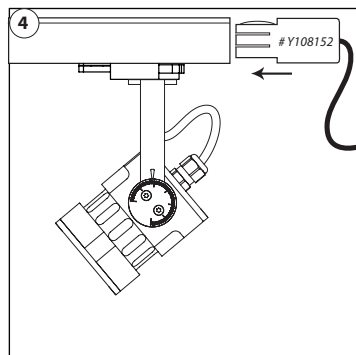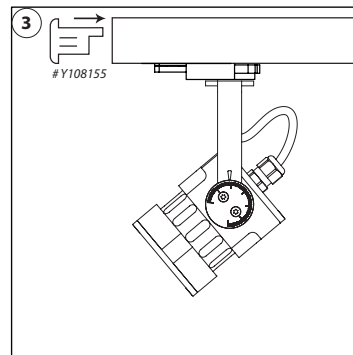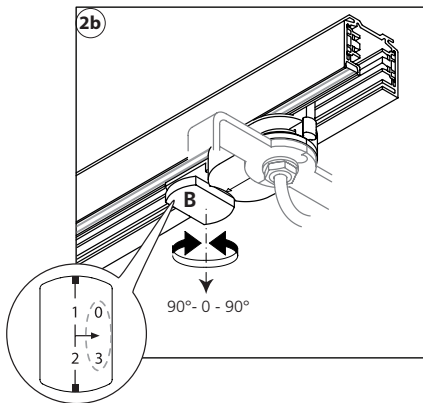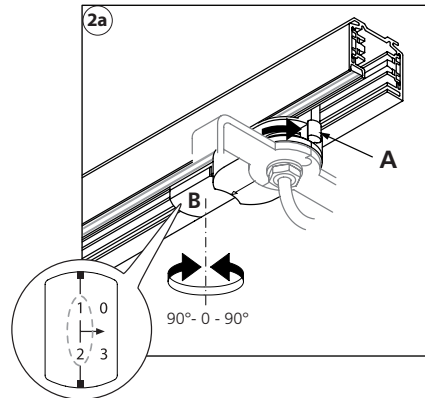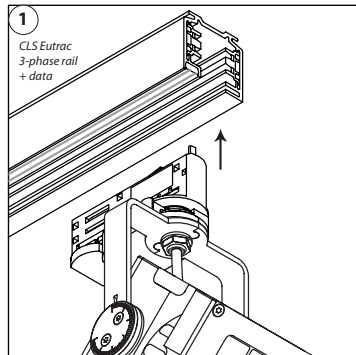

LENS REPLACEMENT

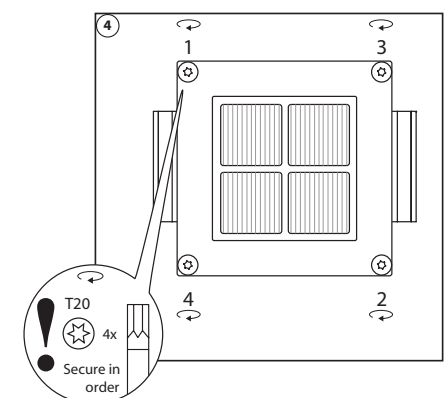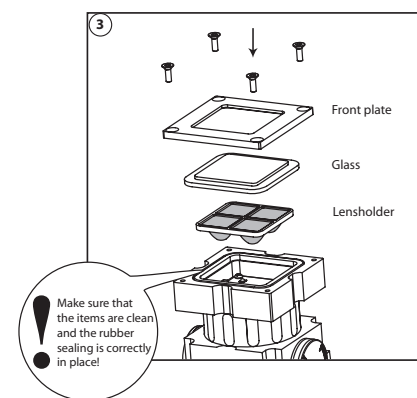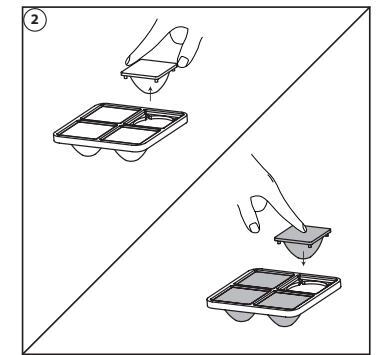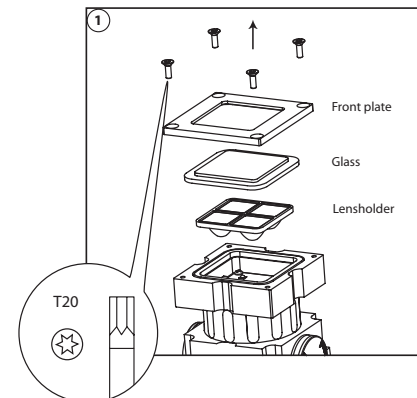

LENS INDEX




PROGRAMMING

All settings can be configured via DMX. Settings can be configured at once or separately. When one or a couple settings needs to be changed just leave all other setting values zero. This keeps those settings unchanged. Please check the table for more information.

Always use a DMX controller with digital interface. If not available, you can purchase the CLS D-ta DMX addresser unit (#122200).

First make sure to set the DATA on the DMX controller. To program the setting into the LED fixture follow the next steps.

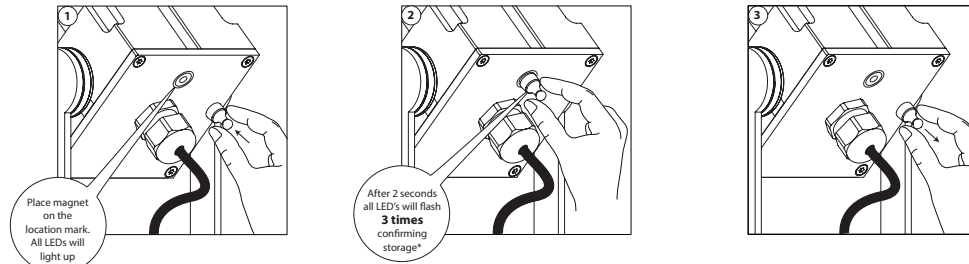

* If all LEDs flash 10 times, something went wrong. Please try again. If the problem continues to occur, please contact your local sales distributor.

WIRELESS DMX

See the Manual of Wireless Solutions. The Manual can be found on our CLS website, in the Downloads section. Or use the link below <https://www.cls-led.com/wp-content/uploads/cls-files/W-DMX-manual.pdf>

Unlink procedure

When the fixture does not receive a DMX signal (DMX controller off), place the magnet on the bottom of the fixture for 5 seconds. Slow flash indicates that the fixture is unlinked.

BLUETOOTH BY CASAMBI

For Casambi controlled fixtures, see the manual of Casambi. The Manual can be found on our CLS website, in the Downloads section. Or use the link below:

https://www.cls-led.com/wp-content/uploads/cls-products/CLS_CASAMBI/MANUAL/Manual_Casambi_controlsyste FN.pdf

PROGRAMMING TABLE

PROGRAMMING TABLE				
DMX	Function	Data	Parameters	Description
CH1	Set address 001 to 255	0	0 = no change *	Use this DMX channel to set address from 001 to 255. The configured DMX address is called "n"
		1...255	DMX address = 1...255	
CH2	Set address 256 to 508	0	no change	Use this DMX channel to set address from 256 to 508. The configured DMX address is called "n"
		1...255	DMX address = 256...508	
CH3	Static behavior	0	no change	If no DMX is present the fixture will respond like set in this function.
		1	last DMX value *	
		2	output off	
		3	load static values	
CH4	Soft dim	0	no change	When dynamic softdim is activated an extra DMX channel behind the colours and/or Master controls the soft dim reaction. If fixed no extra DMX channel is used.
		1	off *	
		2	dynamic	
		3-250	fixed interpolation delay	
CH5	Master control	0	no change	If master is first channel is selected the channel will be DMX channel "n". If master is last channel is selected the channel will be "n+x" ("x" is calculated in the output patch).
		1	no master used *	
		2	master is first channel	
		3	master is last channel	
CH6	Output 1 patch	0	no change	Each output channel can be patched to respond to the desired DMX channel. This enables the user to mix up the colours according to the controller that is used.
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH7	Output 2 patch	0	no change	Example: all outputs are patched as 1 All outputs will be controlled by DMX channel "n". If master is used total DMX channels will be 2 otherwise it uses 1 channel ("x" = 1).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH8	Output 3 patch	0	no change	Example: output 1&2 are patched as 1 and 3&4 are patched as 2 Output 1&2 will be controlled by DMX channel "n". Output 3&4 will be controlled by DMX channel "n+1". If master is used total DMX channels will be 3 otherwise it uses 2 channels ("x" = 2).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH9	Output 4 patch	0	no change	
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH10	Static output 1	0	no change	Each output channel can be set to a static intensity.
		1	output off	
CH11	Static output 2	2...255	intensity 2...255 *(255)	If no DMX is present and Static behavior is set to "load static values". The outputs will be set to the configured intensity values.
		0	no change	
CH12	Static output 3	1	output off	
		2...255	intensity 2...255 *(255)	
CH13	Static output 4	0	no change	
		1	output off	
CH14	Load default settings	2...255	intensity 2...255 *(255)	This function resets all settings to the Factory setting.
		0	no change	
CH15	Input Resolution setting	1	load Factory settings	In 16 bit mode 2 channels are used per colour. First channel is rough channel, second channel fine. 16 bit mode is only available in DRIVE mode 2.
		0	no change	
CH16	Drive mode setting	0	no change	You can set the frequency of the PWM for best compatibility with Camera Systems. However, the highest resolution of the dimming curve will be at the lowest frequency. Option 1 can be used to be compatible with older installation and new fixtures.
		1	compatible with version < 2020	
		2	PWM frequency 0.7kHz *	
		3	PWM frequency 1.4kHz	
		4	PWM frequency 2.8kHz	
		5	PWM frequency 5.6kHz	

* Default setting

ACCESSORIES

ACCESSORIES Global

Global - black

Y108501-B	CLS Global 3-phase rail + data 1 meter black
Y108502-B	CLS Global 3-phase rail + data 2 meter black
Y108503-B	CLS Global 3-phase rail + data 3 meter black
Y108504-B	CLS Global 3-phase rail + data 4 meter black
Y108511-B	CLS Global 3-phase rail + data end feed right, black
Y108512-B	CLS Global 3-phase rail + data end feed left, black
Y108513-B	CLS Global 3-phase rail + data middle feed black
Y108515-B	CLS Global 3-phase rail + data L-coupler inner black
Y108516-B	CLS Global 3-phase rail + data L-coupler outer black
Y110938	CLS Global 3-phase rail + data end cap black

Global - grey

Y108501-G	CLS Global 3-phase rail + data 1 meter grey
Y108502-G	CLS Global 3-phase rail + data 2 meter grey
Y108503-G	CLS Global 3-phase rail + data 3 meter grey
Y108504-G	CLS Global 3-phase rail + data 4 meter grey
Y108511-G	CLS Global 3-phase rail + data end feed right, grey
Y108512-G	CLS Global 3-phase rail + data end feed left, grey
Y108513-G	CLS Global 3-phase rail + data middle feed grey
Y108515-G	CLS Global 3-phase rail + data L-coupler inner grey
Y108516-G	CLS Global 3-phase rail + data L-coupler outer grey
Y110935	CLS Global 3-phase rail + data end cap grey

ACCESSORIES

122200	CLS D-Ta DMX tester/addresser unit
Y106017	CLS Magnet pin (5 pcs)

2024 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf


LIST OF SYMBOLS



Protection class
One, two or three



Application area
Indoor or outdoor



Application area
Floor, wall or ceiling



Swivel
Fixture is horizontally rotatable, indicated in degrees



Swivel
Fixture is vertically rotatable, indicated in degrees



Multiple connection
Daisychain connectivity



Installation depth
In centimeters



Installation size
In centimeters



Cable length
Maximum cable attached to the fixture in centimeters



Driver
Inclusive or exclusive Internal or external



Weight
In grams/kilograms



Pressure
Maximum pressure on the fixture in kg/cm²



Lifespan
Of the light source in hours



Lenses
Available lenses, indicated in degrees



Performance Zoom
Adjustable beam angle



LEDs
Kind of LED used in the fixture



Plug & play
Easy connection using the SmartConnect system



IP value
Ingress Protection classifies the degrees of protection provided against the intrusion of the product



Colour changing
RGB, RGB-W, RGB-A, AWB or Tunable White



Retail & Food LED modules
Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.



Colour
Available colours: Amber, blue, red or green



White colour temperature
In different Kelvin values: Cold white, neutral white, warm white or extra warm white




Curve
Minimal bending curve in centimeters



Cutting length
Indicated by the cutting marks



LED pitch
Pitch between the LEDs in millimeters



Power supply
In VDC, VAC or milliAmpere



Power consumption
In VA or Watt



Dimmable
1-10 Volt, Phase, individual, DMX dimmable or DALI



PWM dimming
Traditional PWM dimming, DMX analog or DMX Hybrid dim



Bluetooth controlled
By Casambi



Magne dimming
Accurate dimming from 100 - 1% by using a magnet



Dynamic Control
Dynamic Power Control or Dynamic Temperature Control



DMX input
Fixture works on DMX512 protocol or Wireless DMX



Combined product
Compose your own fixture



Warranty
3 or 5 years warranty on the product



Conformité Européenne
CE marking for free marketability of industrial goods within the EU



Energy label



Lightsource
Equipped with a CLS, Bridgelux or a Xicato LED module