



Index	2	Programming	5
Safety information	2	Wireless DMX	5
Content	2	Bluetooth by Casambi	5
Technical	3	Programming table	6
Specifications	3	Reflector replacement	7
Installation	4	List of symbols	8


SAFETY INFORMATION




Do not stare into the LED




Qualified technician




Disconnect the power supply before installing or maintaining




Make sure all connectors are connected properly




Use a source of AC power that complies to local electrical codes




Block access below the work area when maintaining the unit



Don't modify or install genuine parts on this product






Don't install in a flammable or explosive area




Warning! Some surfaces can be hot

CONTENT

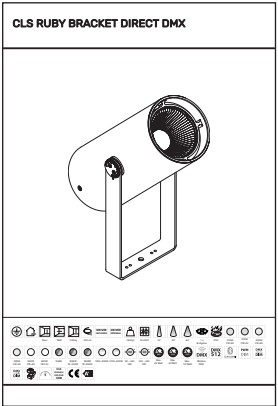





3000K CRI>92




4000K CRI>80




4000K CRI>92




RGBW




RGBW W: 3000K




RGBW W: 4000K




1800-4000K 2700-6500K




80-264 VAC




200-240 VAC




Max. 45 Watt




Max. 60 Watt




Max. 110 Watt




DMX 512




Wireless DMX




IP20




2700K CRI>80




2700K CRI>92




3000K CRI>80




DMX DIM




CASAMBI




PWM DIM




DMX DIM




5 YEAR WARRANTY



CLS DYNAMIC COLOUR COB




CE




A+

TECHNICAL

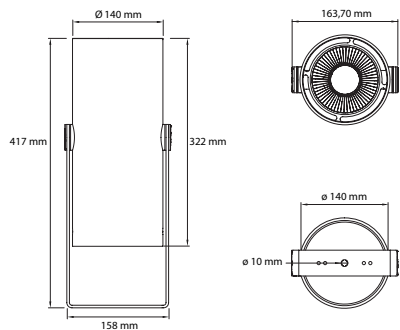

Tools

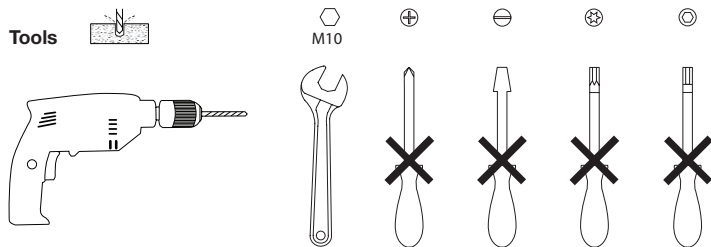







SPECIFICATIONS

LED:	High Power LED
Available colours:	CRI>80: 2700K, 3000K, 4000K CRI>92: 2700K, 3000K, 4000K (only for the 7 - 9 serie)
Colour Changing:	RGBA, RGBW (w: 3000K), RGBW (w: 4000K)
Tunable White:	1800K - 4000K & 2700K - 6500K
Lenses:	16°, 49°, 63°
Power supply:	200 - 240 VAC
Colour changing & TW:	80 - 264 VAC
Power consumption:	7 serie: Max. 45 Watt 8 serie: Max. 60 Watt 9 serie: Max. 110 Watt
Colour changing & TW:	9 serie: Max. 110 Watt
Housing:	Anodised aluminium black or white coated
Weight:	3600 gr
IP value:	IP20
Cable length:	200 centimeters
Measurements:	417 x 163,7 x 140 mm (hxbxø)
Ambient temperature:	-10° C till +40° C

ACCESSORIES

Y108601	CLS Ruby reflector Spot
Y108602	CLS Ruby reflector Medium
Y108603	CLS Ruby reflector Flood
Y108610	CLS Ruby honeycomb louvre
Y106017	CLS Magnet for programming, 5 pcs
122200	CLS D-ta DMX addresser

INSTALLATION

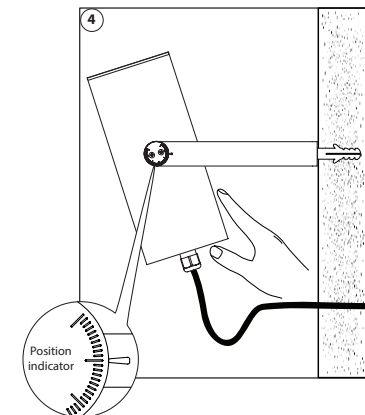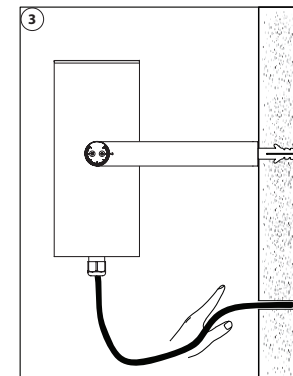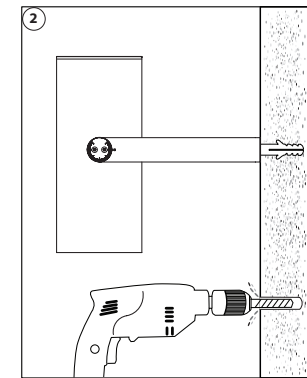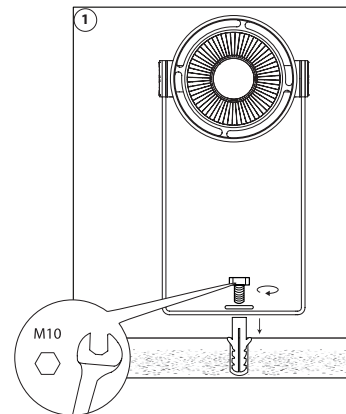


PROGRAMMING

All settings can be configured via DMX. Settings can be configured at once or separately. When one or a couple settings needs to be changed just leave all other setting values zero. This keeps those settings unchanged. Please check the table for more information.

Always use a DMX controller with digital interface. If not available, you can purchase the CLS D-ta DMX addresser unit (#122200).

First make sure to set the DATA on the DMX controller. To program the setting into the LED fixture follow the next steps using a CLS magnet (#Y106017).

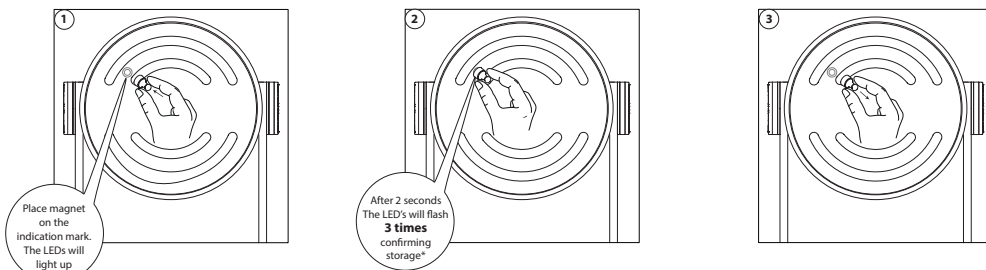

* If all LEDs flash 10 times, something went wrong. Please try again. If the problem continues to occur, please contact your local sales distributor.

WIRELESS DMX

See the Manual of Wireless Solutions. The Manual can be found on our CLS website, in the Downloads section. Or use the link below <https://www.cls-led.com/wp-content/uploads/cls-files/W-DMX-manual.pdf>

Unlink procedure

When the fixture does not receive a DMX signal (DMX controller off), place the magnet on the bottom of the fixture for 5 seconds. Slow flash indicates that the fixture is unlinked.

BLUETOOTH BY CASAMBI

For Casambi controlled fixtures, see the manual of Casambi. The Manual can be found on our CLS website, in the Downloads section. Or use the link below: https://www.cls-led.com/wp-content/uploads/cls-products/CLS_CASAMBI/MANUAL/Manual_Casambi_controlsistem_EN.pdf


PROGRAMMING TABLE

PROGRAMMING TABLE				
DMX	Function	Data	Parameters	Description
CH1	Set address 001 to 255	0	0 = no change *	Use this DMX channel to set address from 001 to 255. The configured DMX address is called "n"
		1...255	DMX address = 1...255	
CH2	Set address 256 to 508	0	no change	Use this DMX channel to set address from 256 to 508. The configured DMX address is called "n"
		1...255	DMX address = 256...508	
CH3	Static behavior	0	no change	If no DMX is present the fixture will respond like set in this function.
		1	last DMX value *	
		2	output off	
		3	load static values	
CH4	Soft dim	0	no change	When dynamic softdim is activated an extra DMX channel behind the colours and/or Master controls the soft dim reaction. If fixed no extra DMX channel is used.
		1	off *	
		2	dynamic	
		3-250	fixed interpolation delay	
CH5	Master control	0	no change	If master is first channel is selected the channel will be DMX channel "n". If master is last channel is selected the channel will be "n+x" ("x" is calculated in the output patch).
		1	no master used *	
		2	master is first channel	
		3	master is last channel	
CH6	Output 1 patch	0	no change	Each output channel can be patched to respond to the desired DMX channel. This enables the user to mix up the colours according to the controller that is used.
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH7*	Output 2 patch	0	no change	Example: all outputs are patched as 1 All outputs will be controlled by DMX channel "n". If master is used total DMX channels will be 2 otherwise it uses 1 channel ("x" = 1).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH8*	Output 3 patch	0	no change	Example: output 1&2 are patched as 1 and 3&4 are patched as 2 Output 1&2 will be controlled by DMX channel "n". Output 3&4 will be controlled by DMX channel "n+1". If master is used total DMX channels will be 3 otherwise it uses 2 channels ("x" = 2).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH9*	Output 4 patch	0	no change	
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH10	Static output 1	0	no change	Each output channel can be set to a static intensity.
		1	output off	
		2...255	intensity 2...255 *(255)	
CH11*	Static output 2	0	no change	If no DMX is present and Static behavior is set to "load static values". The outputs will be set to the configured intensity values.
		1	output off	
		2...255	intensity 2...255 *(255)	
CH12*	Static output 3	0	no change	
		1	output off	
		2...255	intensity 2...255 *(255)	
CH13*	Static output 4	0	no change	
		1	output off	
		2...255	intensity 2...255 *(255)	
CH14*	Load default settings	0	no change	This function resets all settings to the Factory setting.
		1	load Factory settings	
CH15	Input Resolution setting	0	no change	In 16 bit mode 2 channels are used per colour. First channel is rough channel, second channel fine. 16 bit mode is only available in DRIVE mode 2.
		1	8 bit *	
		2	16 bit	
CH16	Drive mode setting	0	no change	You can set the frequency of the PWM for best compatibility with Camera Systems. However, the highest resolution of the dimming curve will be at the lowest frequency. Option 1 can be used to be compatible with older installation and new fixtures.
		1	compatible with version < 2020	
		2	PWM frequency 0.7kHz *	
		3	PWM frequency 1.4kHz	
		4	PWM frequency 2.8kHz	

* Default setting

CHXX* Not applicable on the Ruby Bracket DMX single colour

REFLECTOR REPLACEMENT

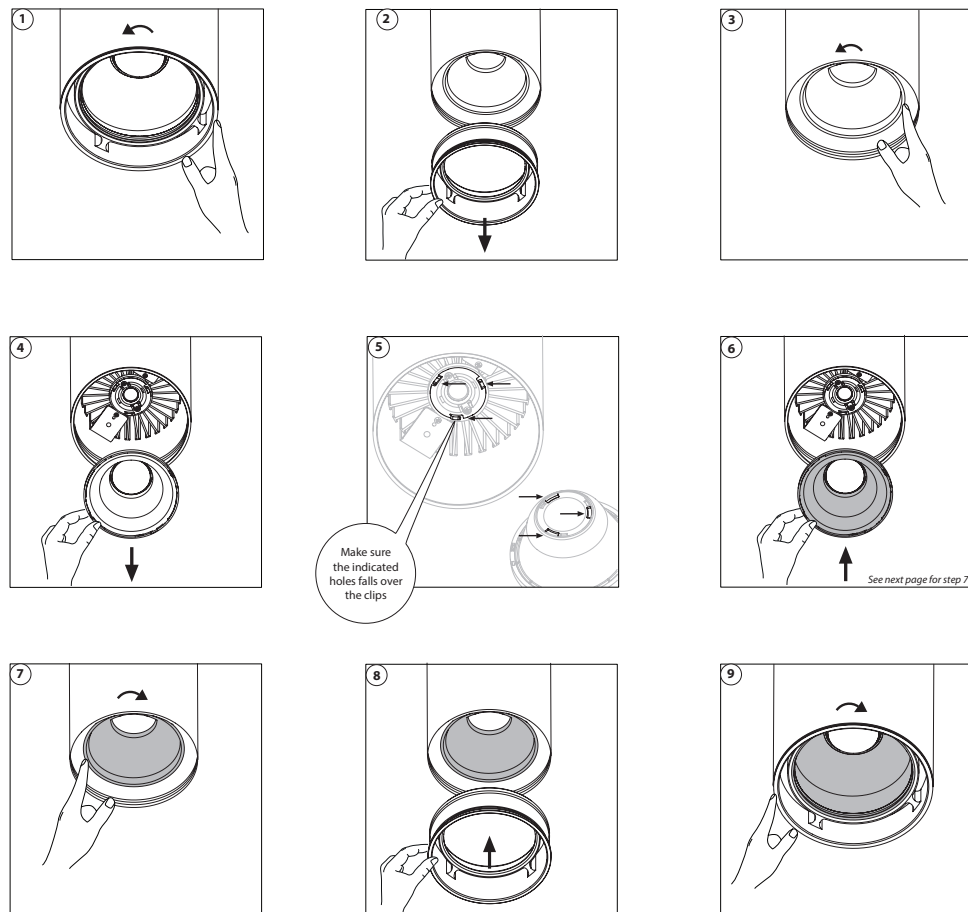

2024 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf

LIST OF SYMBOLS

	Protection class One, two or three		Retail & Food LED modules Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.
	Application area Indoor or outdoor		Colour Available colours: Amber, blue, red or green
	Application area Floor, wall or ceiling		White colour temperature In different Kelvin values: Cold white, neutral white, warm white or extra warm white
	Swivel Fixture is horizontally rotatable, indicated in degrees		Curve Minimal bending curve in centimeters
	Swivel Fixture is vertically rotatable, indicated in degrees		Cutting length Indicated by the cutting marks
	Multiple connection Daisychain connectivity		LED pitch Pitch between the LEDs in millimeters
	Installation depth In centimeters		Power supply In VDC, VAC or milliAmpere
	Installation size In centimeters		Power consumption In VA or Watt
	Cable length Maximum cable attached to the fixture in centimeters		Dimmable 1-10 Volt, Phase, individual, DMX dimmable or DALI
	Driver Inclusive or exclusive Internal or external		PWM dimming Traditional PWM dimming, DMX analog or DMX Hybrid dim
	Weight In grams/kilograms		Bluetooth controlled By Casambi
	Pressure Maximum pressure on the fixture in kg/cm ²		Magno dimming Accurate dimming from 100 - 1% by using a magnet
	Lifespan Of the light source in hours		Dynamic Control Dynamic Power Control or Dynamic Temperature Control
	Lenses Available lenses, indicated in degrees		DMX input Fixture works on DMX512 protocol or Wireless DMX
	Performance Zoom Adjustable beam angle		Combined product Compose your own fixture
	LEDs Kind of LED used in the fixture		Warranty 3 or 5 years warranty on the product
	Plug & play Easy connection using the SmartConnect system		Conformité Européenne CE marking for free marketability of industrial goods within the EU
	IP value Ingress Protection classifies the degrees of protection provided against the intrusion of the product		Energy label
	Colour changing RGB, RGB-w, RGB-A, AWB or Tunable White		Lightsources Equipped with a CLS, Bridgelux or a Xicato LED module