



Index	2
Safety information	2
Content	2
Technical	3
Specifications	3
Installation	4
Clamp Mounting	5
Reflector replacement	6
Status display	8
Configuration	8
Menu description	8
Page 1: DMX addressing	9
Page 2: Static behaviour	9
Page 3: Soft dim option	9
Page 4: Master control configuration	9
Page 5: Dim curve used	9
Page 6: Output control	10
Page 7: Resolution	10
Page 8-11: Patch	10
Page 12-15: Static value	10
Page 16-19: Current setting configuration	11
Page 20: Record static value	11
Page 21: Firmware vesion	11
Page 22: Testloop	11
Page 23: Store configuration	11
Page 24: Cancel configuration	11
List of Symbols	12

					DRIVER INCLUDED	DRIVER INTERNAL											
		Floor	Wall	Ceiling			3700 gr	50.000 h	19°	49°	63°	IP20	2700K CRI>80	2700K CRI>92	3000K CRI>80	3000K CRI>92	4000K CRI>80
4000K CRI>92	RGBW W-4000K 4000K	1800K 4000K	2700K 5700K	80 ~ 264 VAC	Max. 110 Watt	DMX 512	dimmable	PWM DIM	DMX ANALOG DIM	DMX HYBRID DIM	5	CLS DYNAMIC COLOUR COB	LIGHTSOURCE BY CITIZEN	CE	A+		

SAFETY INFORMATION


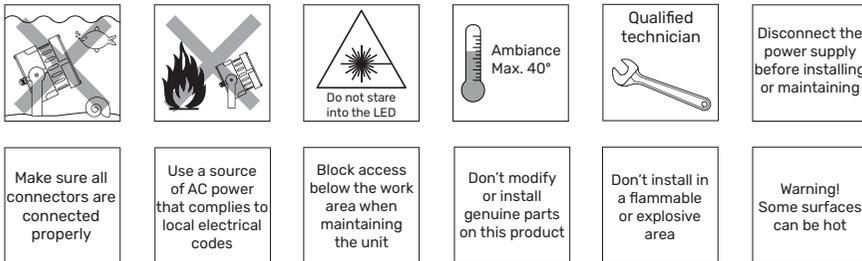


CONTENT

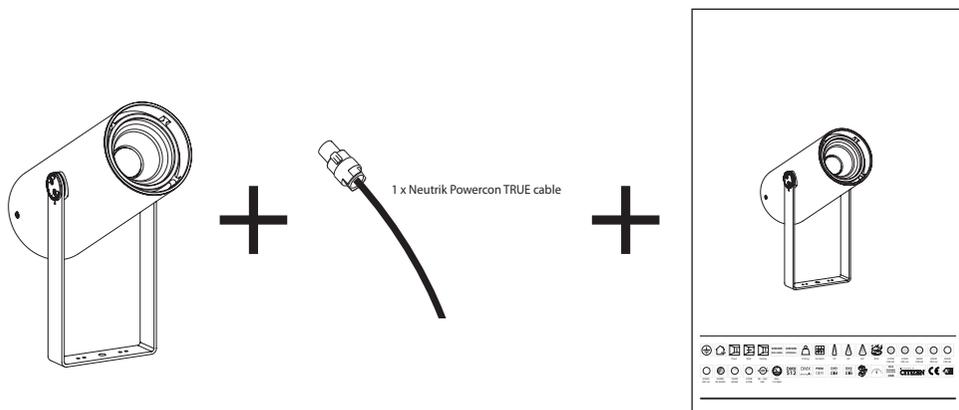

2025 CLS-LED BV. All rights reserved. Information subject to change without notice. CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf

TECHNICAL







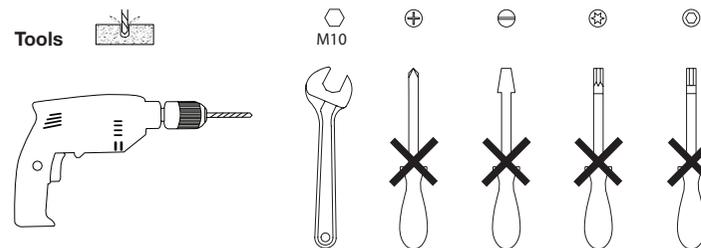
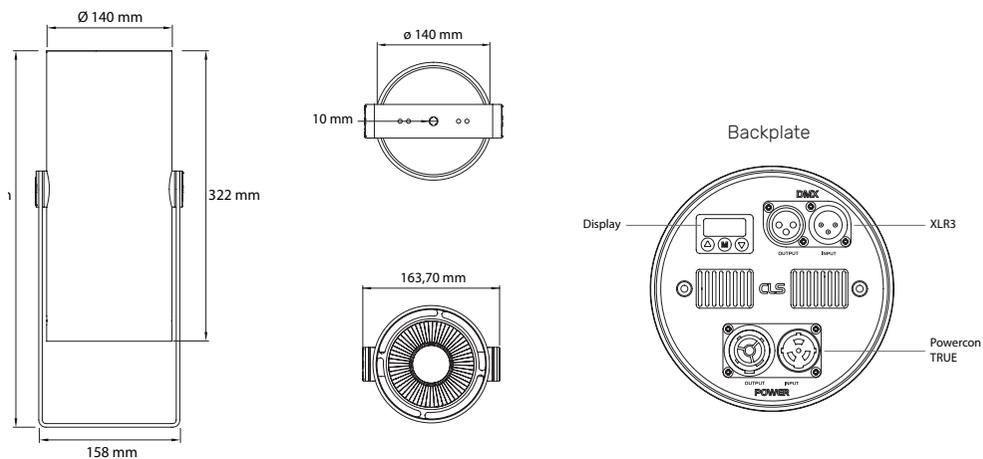


SPECIFICATIONS





LED:	1 x High Power or CLS DCC
Available colours:	CRI>80: 2700K CRI>92: 2700K, 3000K, 4000K
Colour changing:	RGBW (W: 3000K or 4000K)
Tunable White:	1800K-4000K or 2700K-5700K
Lenses:	19°, 49°, 63°
Power supply:	80 – 264 VAC
Power consumption:	9 serie: max. 110 Watt
Connection:	Power: Neutrik Powercon TRUE DMX: XLR3
Housing:	Anodised aluminium black or white coated
Weight:	3700 gr
IP value:	IP20
Measurements:	417 x 163,7 x 140 mm (hxbxø)
Ambient temperature:	-10° C till +40° C

INSTALLATION

REFLECTOR REPLACEMENT

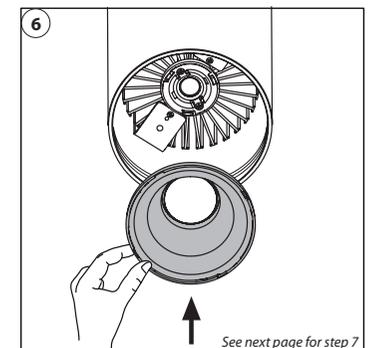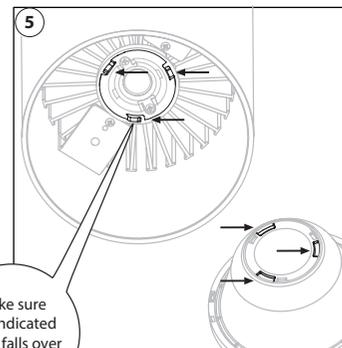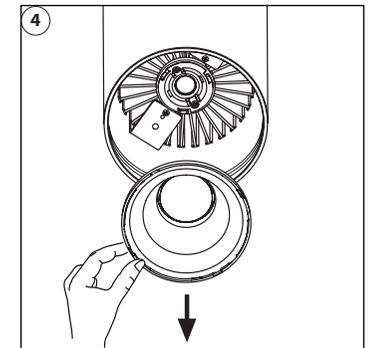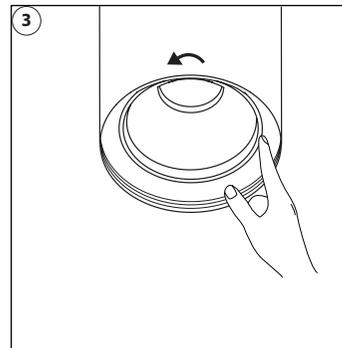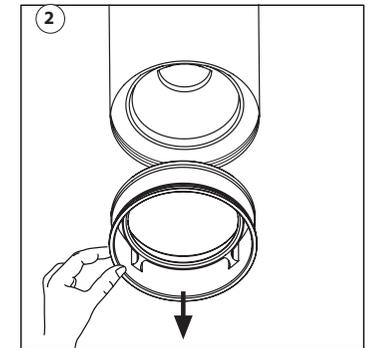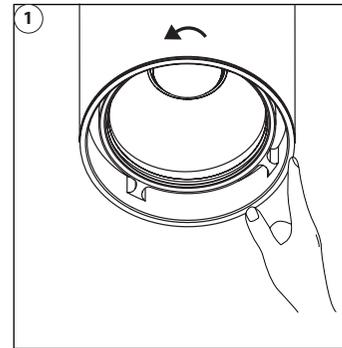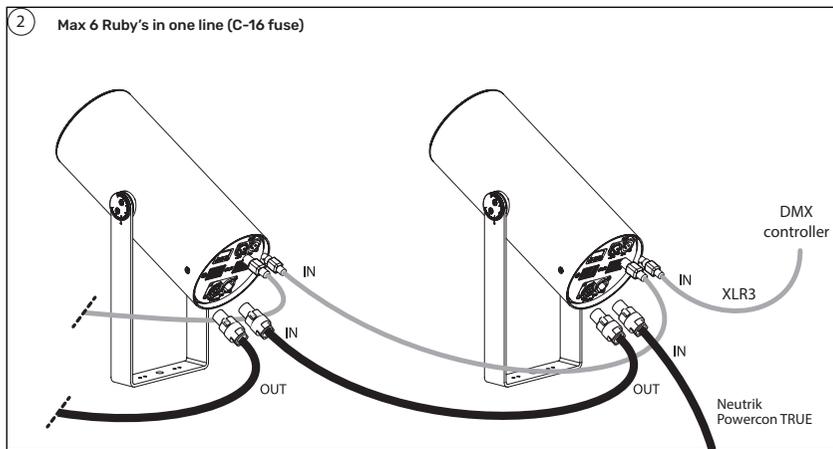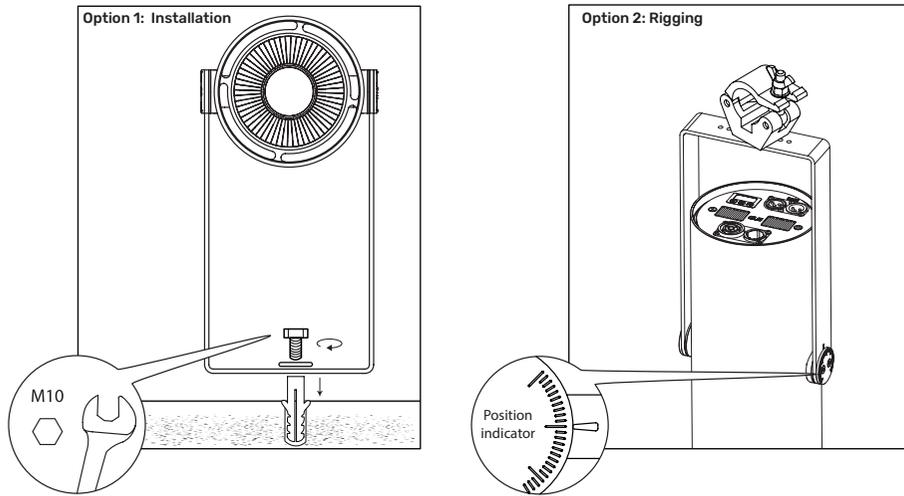


REFLECTOR REPLACEMENT

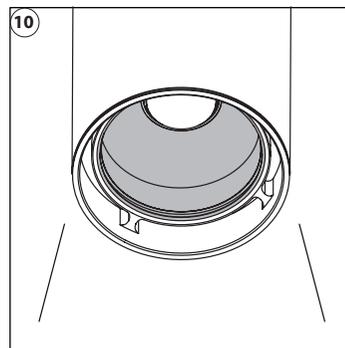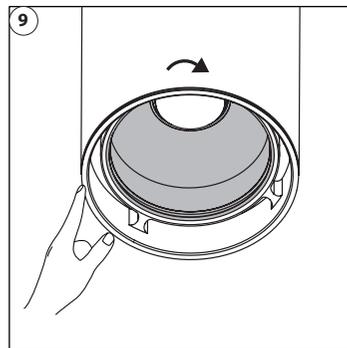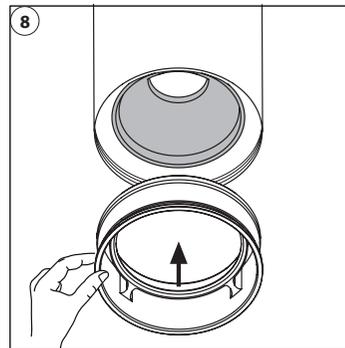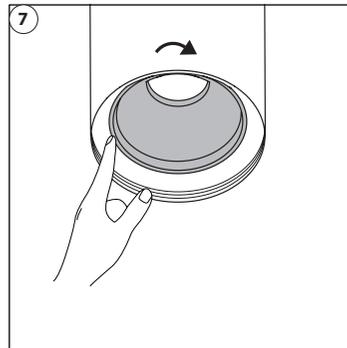

STATUS DISPLAY

The Ruby has a display which is used to interface with the user. When the Ruby is powered the DMX address is shown. When DMX is active the DMX status dot is on. With no DMX signal the dot is flashing.

By pressing the menu button you can scroll through the different status pages. The status pages dots will indicate which page is displayed. The status pages will show the output value of the outputs 1-4 from 0 (min) to 255 (max).

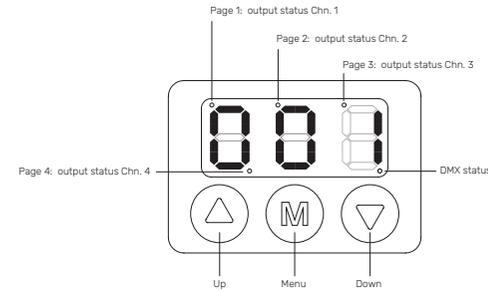


CONFIGURATION

The Ruby must be configured to fit the application it is used for. To make configuration easy the Ruby has a user friendly menu interface.


Menu description

When the Ruby is powered the status display is shown with the DMX address. To enter the menu press and hold the menu button for 3 seconds. The Ruby will enter menu interface on page 1. The menu interface holds different pages. Use the up and down button to scroll through the pages. To select the page press the menu button. In each page the settings can be adjusted. To leave a page press the menu button again.

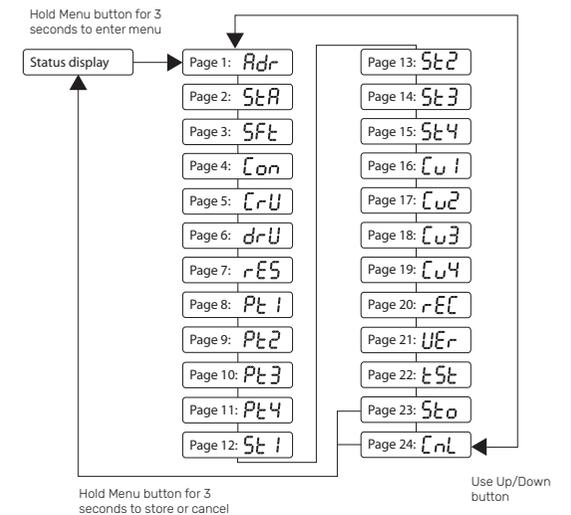

Page 1: DMX addressing

In this page you can adjust the DMX address of the LDC-41. Use the up and down button to adjust the value. Hold down the up or down button to scroll fast. When DMX address is selected press the menu button to return to the main menu.

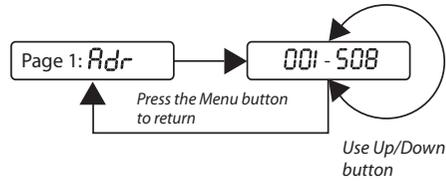


Default DMX address: 1

Page 2: Static behavior


Static behavior when no DMX is connected.

"HLd" = Hold last data
"oFF" = Output off
"LSv" = Load static values

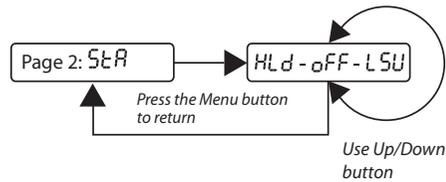


Page 3: Soft dim option

"oFF" = softdim off
"on" = softdim on

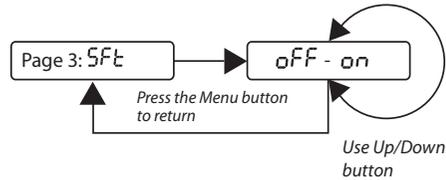


Page 4: Master control configuration

Master used for dim channel;
"oFF" = Master function off
"Frt" = Master is first channel
"LSt" = Master is last channel

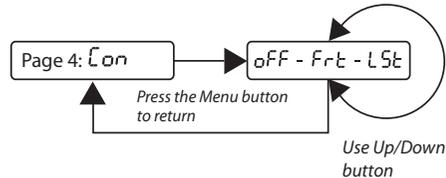


Page 5: Dim curve used

"Lin" = linear
"LoG" = logarithmic

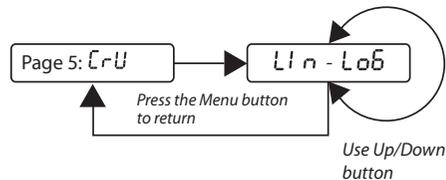


Page 6: Output control

"hYb" = Hybrid
"aNa" = Analog (Constant Current Reduction)
"DiG" = Digital (Stochastic Signal Density Modulation)

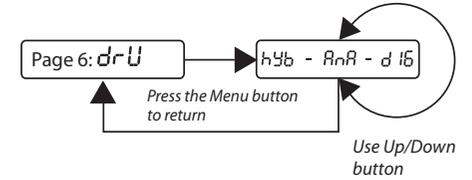


Output control dimming charts

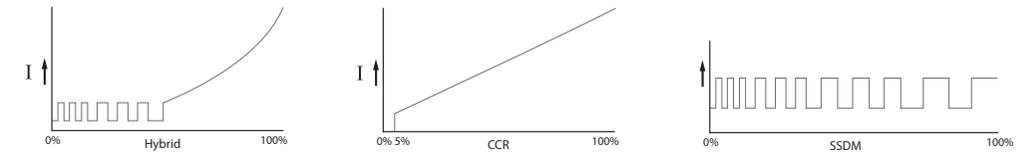


Page 7: Resolution

Control resolution 8 Bit.
1 DMX channel per output.




Page 8-11: Patch

To adjust the Patch Value of an output channel enter the corresponding page and change the value. The Patch value can be adjusted from 0 - 4. To return to the main menu press the menu button.

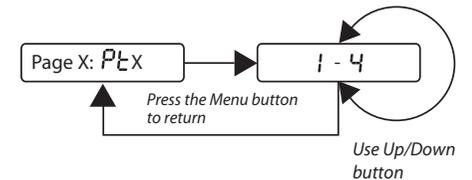

Page 12-15: Static Value


To adjust the Static Value of an output channel enter the corresponding page and change the value. The Static value can be adjusted from 0 - 255. To return to the main menu press the menu button.

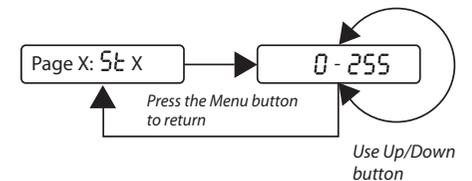

LIST OF SYMBOLS

Page 16-19: Current Setting configuration


To adjust the current of an output channel enter the corresponding page and change the value. The current can be adjusted from 350 – 1000mA in steps of 50mA. To return to the main menu press the menu button.

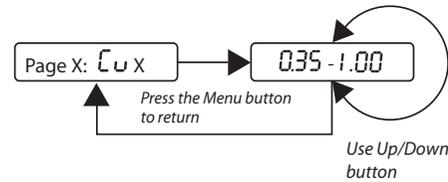

Default Current configuration: 700mA for each channel


Page 20: Record Static value

"YES" = Will copy the DMX values
"No" = Return without recording

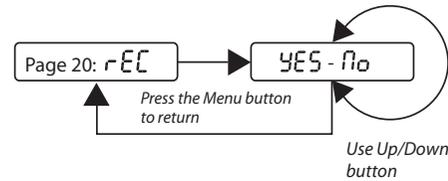


Page 21: Firmware version

Current firmware version on the LDC-41.

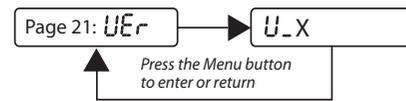


Page 22: Test loop

Entering this page will result in a test loop on the outputs of the LDC-41. This enables the user to test the connections without the need of an DMX controller. To end the test sequence and return to the main menu press the menu button.

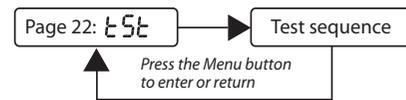


Page 23: Store configuration

After all changes are made the setting need to be stored before they become active. To store the settings go to the store page and press and hold the menu button for 3 seconds. The settings are stored and you will return to the status display.

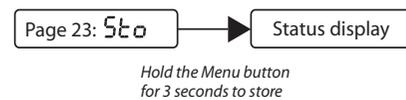

Page 24: Cancel configuration

When you have made changes but you don't want to store them you can cancel the settings. Go to the cancel page and press and hold the menu button for 3 seconds. The settings are not stored and you will return to the status display.

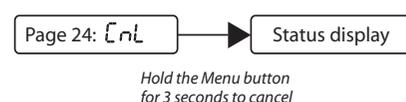

	Protection class One, two or three		Retail & Food LED modules Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.
	Application area Indoor or outdoor		Colour Available colours: Amber, blue, red or green
	Application area Floor, wall or ceiling		White colour temperature In different Kelvin values: Cold white, neutral white, warm white or extra warm white
	Swivel Fixture is horizontally rotatable, indicated in degrees		Curve Minimal bending curve in centimeters
	Swivel Fixture is vertically rotatable, indicated in degrees		Cutting length Indicated by the cutting marks
	Multiple connection Daisychain connectivity		LED pitch Pitch between the LEDs in millimeters
	Installation depth In centimeters		Power supply In VDC, VAC or milliAmpere
	Installation size In centimeters		Power consumption In VA or Watt
	Cable length Maximum cable attached to the fixture in centimeters		Dimmable 1-10 Volt, Phase, individual, DMX dimmable or DALI
	Driver Inclusive or exclusive Internal or external		PWM dimming Traditional PWM dimming, DMX analog or DMX Hybrid dim
	Weight In grams/kilograms		Bluetooth controlled By Casambi
	Pressure Maximum pressure on the fixture in kg/cm ²		Magne dimming Accurate dimming from 100 – 1% by using a magnet
	Lifespan Of the light source in hours		Dynamic Control Dynamic Power Control or Dynamic Temperature Control
	Lenses Available lenses, indicated in degrees		DMX input Fixture works on DMX512 protocol or Wireless DMX
	Performance Zoom Adjustable beam angle		Combined product Compose your own fixture
	LEDs Kind of LED used in the fixture		Warranty 3 or 5 years warranty on the product
	Plug & play Easy connection using the SmartConnect system		Conformité Européenne CE marking for free marketability of industrial goods within the EU
	IP value Ingress Protection classifies the degrees of protection provided against the intrusion of the product		Energy label
	Colour changing RGB, RGB-W, RGB-A, AWB or Tunable White		Lightsource Equipped with a CLS, Bridgelux or Xicato LED module