






Index	2	Accessories	3	Bluetooth by Casambi	6
Safety information	2	Installation	4	Programming table	7
Content	2	Installation DMX version	5	Reflector replacement	8
Technical	3	Programming DMX	6	Honeycomb assembly	9
Specifications	3	Wireless DMX	6	List of symbols	10

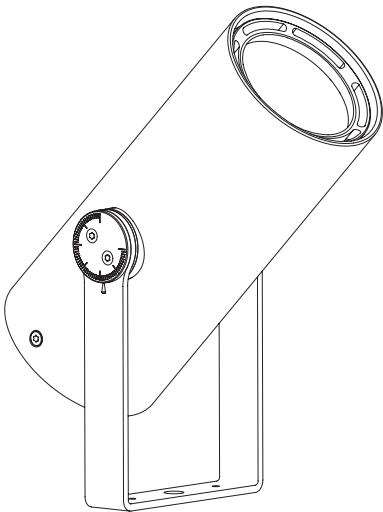


SAFETY INFORMATION




Do not stare into the LED




Use a source of AC power that complies to local electrical codes




Block access below the work area when maintaining the unit




Don't modify or install genuine parts on this product




Don't install in a flammable or explosive area




Warning! Some surfaces can be hot




Make sure all connectors are connected properly



Qualified technician




Disconnect the power supply before installing or maintaining




Ambiance Max. 40°


CONTENT




Floor




Wall




Ceiling




200 cm




DRIVER INCLUDED




DRIVER INTERNAL




1500 gr




50.000 h




19°




37°




63°




IP20




2700K CRI>80




2700K CRI>92




3000K CRI>92




3500K CRI>92




4000K CRI>92




RGBW W: (3000K)




RGBW W: (4000K)




RGBA




1800-400K




2700-6500K




1800-3000K




200 ~ 240 VAC




Max. 30 Watt




Mains dimmable




1-10V dimmable




DMX 512




PWM DIM




DMX 0-10V DIM




DMX 0-5V DIM




CASAMBI




CLS DYNAMIC COLOUR COB




bridgeLux





CE




A+



A++

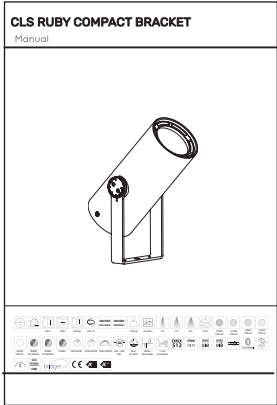


TECHNICAL

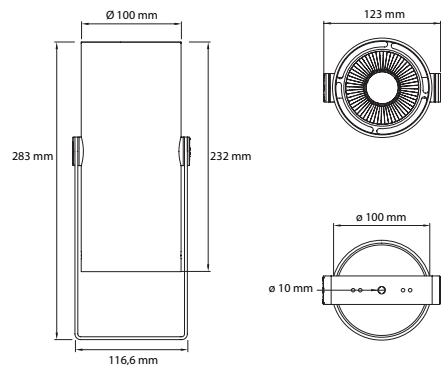

Tools



M10







SPECIFICATIONS

LED: High Power LED
 Available colours: CRI>80: 2500K, 2700K
 CRI>92: 2700K, 3000K, 3500K or 4000K
 Colour Changing: RGBA, RGBW (W: 3000K) or RGBW (W: 4000K)
 Tunable White: 1800K-4000K or 2700K-6500K
 Dim To Warm: 1800K-3000K
 Lenses: 19°, 37°, 63°
 Power supply: 200 ~ 240 VAC
 Power consumption: 6 serie: Max. 30 Watt
 Housing: Anodised aluminium black or white coated
 Weight: 1500 gr
 IP value: IP20
 Cable length: 200 centimeters
 Measurements: 283 x 123 x 100 mm (hxbxø)
 Ambient temperature: -10° C till +40° C


ACCESSORIES

Y106017 CLS Magnet for programming, 5 pcs
 122200 CLS D-ta DMX addresser

INSTALLATION

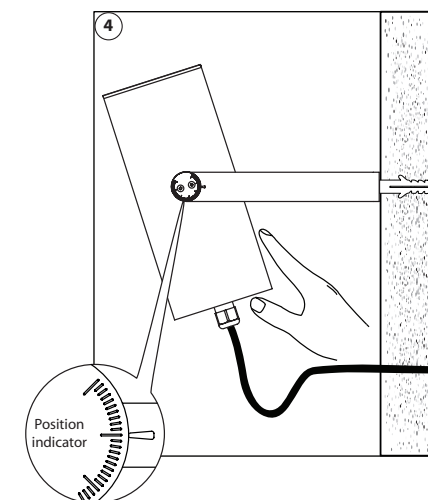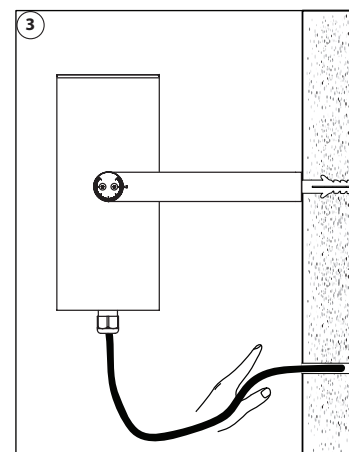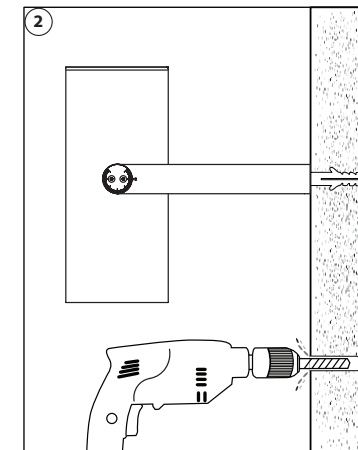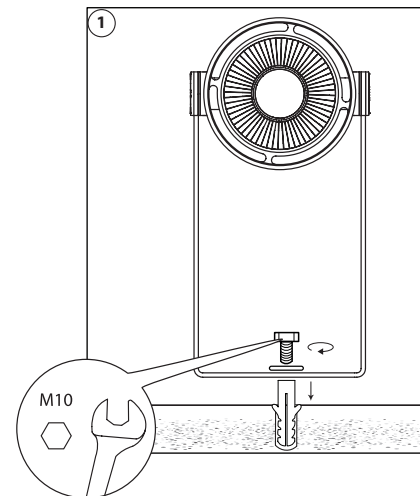

INSTALLATION DMX

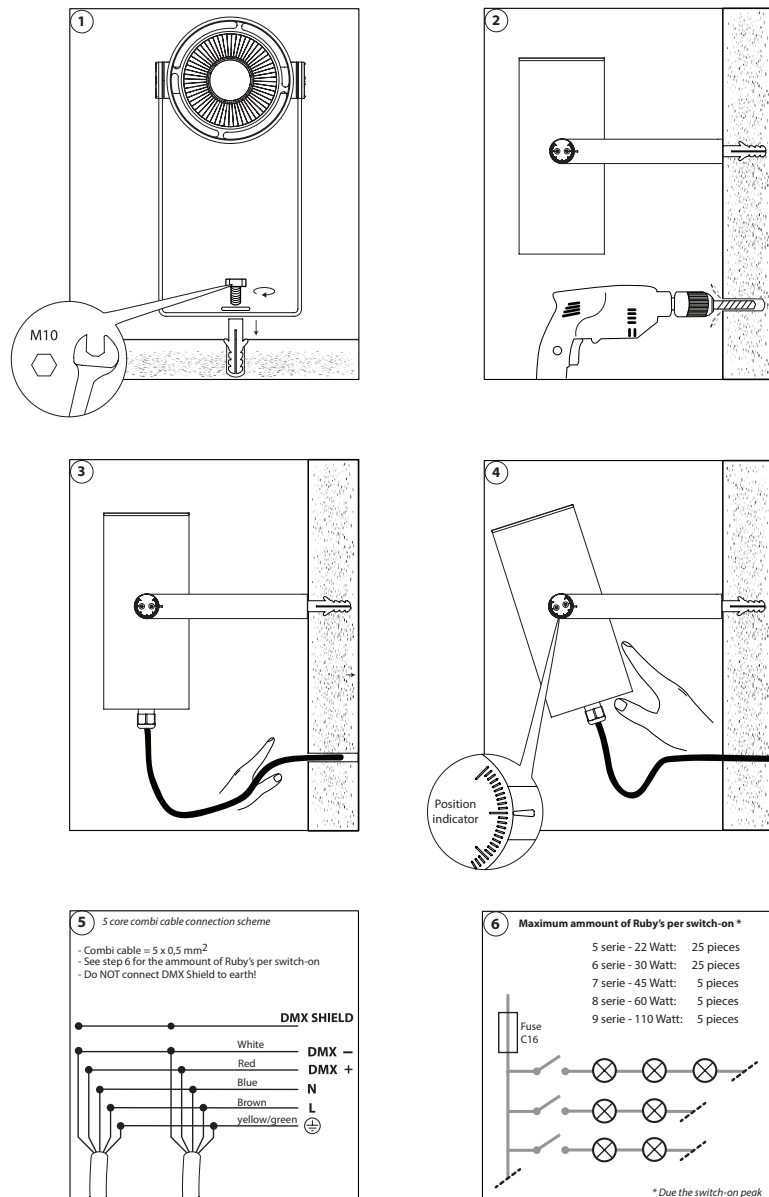


PROGRAMMING DMX

All settings can be configured via DMX. Settings can be configured at once or separately. When one or a couple settings needs to be changed just leave all other setting values zero. This keeps those settings unchanged. Please check the table for more information.

Always use a DMX controller with digital interface.

First make sure to set the DATA on the DMX controller. To program the setting into the LED fixture follow the next steps using a CLS magnet (#Y106017).

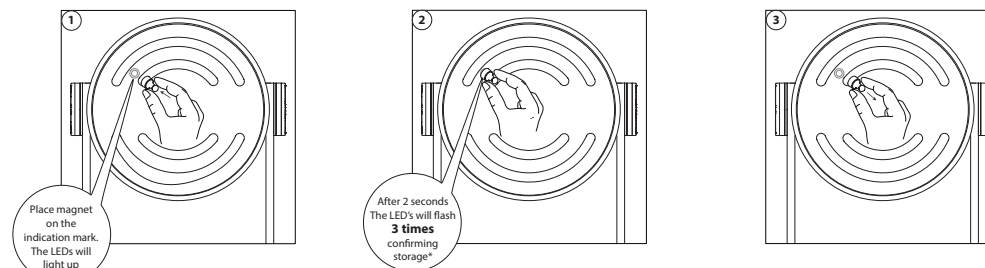

* If all LEDs flash **10 times**, something went wrong. Please try again. If the problem continues to occur, please contact your local sales distributor.

WIRELESS DMX

See the Manual of Wireless Solutions. The Manual can be found on our CLS website, in the Downloads section. Or use the link below <https://www.cls-led.com/wp-content/uploads/cls-files/W-DMX-manual.pdf>

Unlink procedure

When the fixture does not receive a DMX signal (DMX controller off), place the magnet on the bottom of the fixture for 5 seconds. Slow flash indicates that the fixture is unlinked.

BLUETOOTH BY CASAMBI

For Casambi controlled fixtures, see the manual of Casambi. The Manual can be found on our CLS website, in the Downloads section. Or use the link below: https://www.cls-led.com/wp-content/uploads/cls-products/CLS_CASAMBI/MANUAL/Manual_Casambi_controlsistem_EN.pdf


PROGRAMMING TABLE

PROGRAMMING TABLE				
DMX	Function	Data	Parameters	Description
CH1	Set address	0	0 = no change *	Use this DMX channel to set address from 001 to 255. The configured DMX address is called "n"
		1...255	DMX address = 1...255	
CH2	Set address	0	no change	Use this DMX channel to set address from 256 to 508. The configured DMX address is called "n"
		1...255	DMX address = 256...508	
CH3	Static behavior	0	no change	If no DMX is present the fixture will respond like set in this function.
		1	last DMX value *	
		2	output off	
		3	load static values	
CH4	Soft dim	0	no change	When dynamic softdim is activated an extra DMX channel behind the colours and/or Master controls the soft dim reaction. If fixed no extra DMX channel is used.
		1	off *	
		2	dynamic	
		3-250	fixed interpolation delay	
CH5	Master control	0	no change	If master is first channel is selected the channel will be DMX channel "n". If master is last channel is selected the channel will be "n+x" ("x" is calculated in the output patch).
		1	no master used *	
		2	master is first channel	
		3	master is last channel	
CH6	Output 1 patch	0	no change	Each output channel can be patched to respond to the desired DMX channel. This enables the user to mix up the colours according to the controller that is used.
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH7*	Output 2 patch	0	no change	Example: all outputs are patched as 1 All outputs will be controlled by DMX channel "n". If master is used total DMX channels will be 2 otherwise it uses 1 channel ("x" = 1).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH8*	Output 3 patch	0	no change	Example: output 1&2 are patched as 1 and 3&4 are patched as 2 Output 1&2 will be controlled by DMX channel "n". Output 3&4 will be controlled by DMX channel "n+1". If master is used total DMX channels will be 3 otherwise it uses 2 channels ("x" = 2).
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH9*	Output 4 patch	0	no change	Each output channel can be set to a static intensity.
		1	DMX channel n	
		2	DMX channel n+1	
		3	DMX channel n+2	
		4	DMX channel n+3	
CH10	Static output 1	0	no change	If no DMX is present and Static behavior is set to "load static values". The outputs will be set to the configured intensity values.
		1	output off	
CH11*	Static output 2	2...255	intensity 2...255 *(255)	
		0	no change	
CH12*	Static output 3	2...255	intensity 2...255 *(255)	
		0	no change	
CH13*	Static output 4	2...255	intensity 2...255 *(255)	
		0	no change	
CH14*	Load default settings	0	no change	This function resets all settings to the Factory setting.
		1	load Factory settings	
CH15	Resolution setting	0	no change	In 16 bit mode 2 channels are used per colour. First channel is rough channel, second channel fine. 16 bit mode is only available in DRIVE mode 2.
		1	8 bit *	
		2	16 bit	
CH16	Drive mode setting	0	no change	You can set the frequency of the PWM for best compatibility with Camera Systems. However, the highest resolution of the dimming curve will be at the lowest frequency. Option 1 can be used to be compatible with older installation and new fixtures.
		1	compatible with version < 2020	
		2	PWM frequency 0.7kHz *	
		3	PWM frequency 1.4kHz	
		4	PWM frequency 2.8kHz	

* Default setting

CHXX* Not applicable on the Ruby DMX single colour


REFLECTOR REPLACEMENT

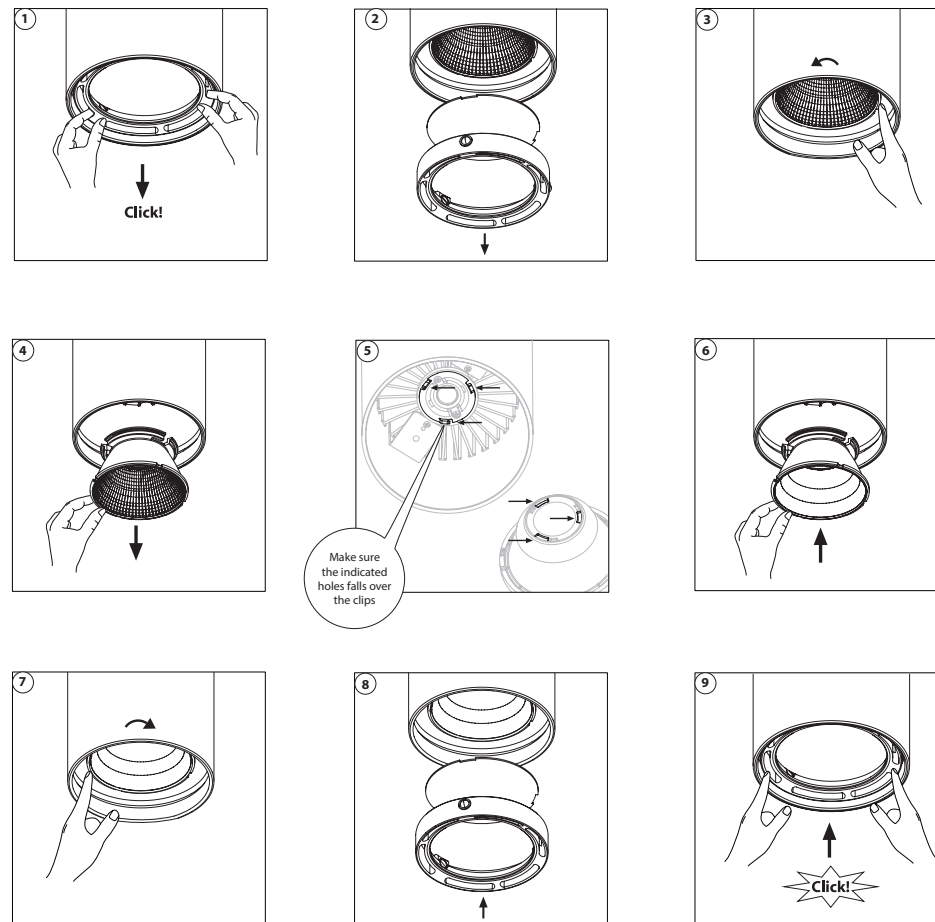

2024 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this manual. No part of this manual may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/General-Terms.pdf

HONEYCOMB ASSEMBLY

LIST OF SYMBOLS

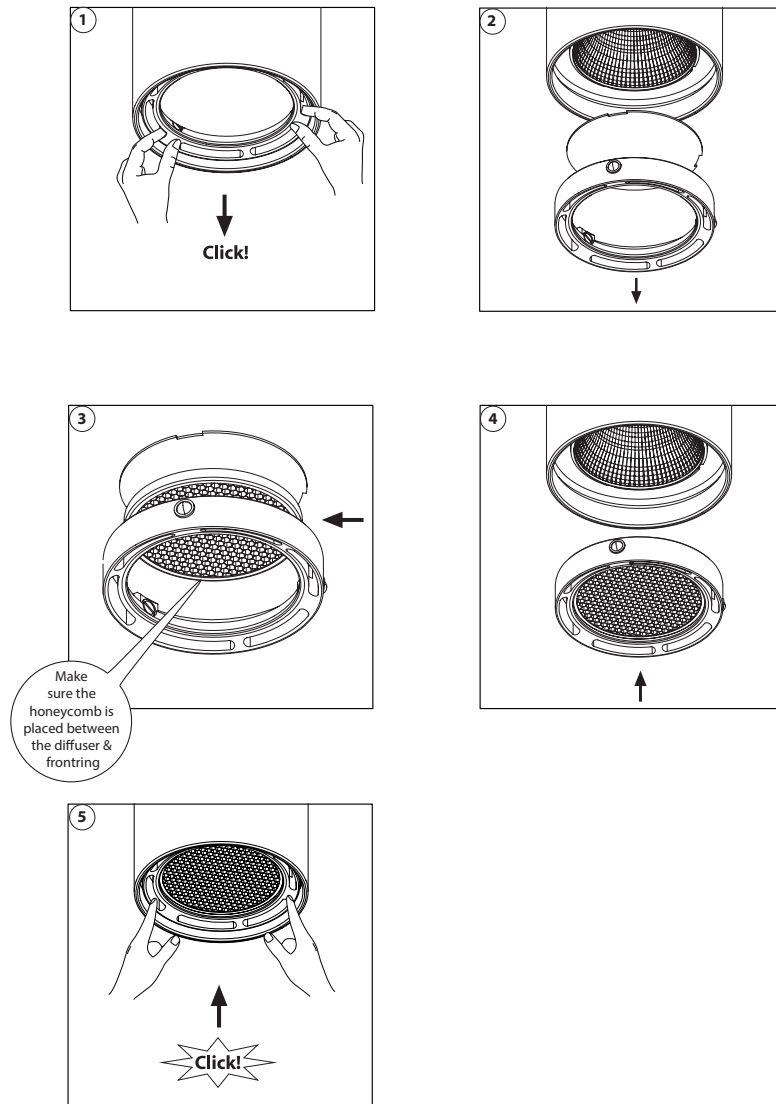

	Protection class One, two or three		Retail & Food LED modules Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.
	Application area Indoor or outdoor		Colour Available colours: Amber, blue, red or green
	Application area Floor, wall or ceiling		White colour temperature In different Kelvin values: Cold white, neutral white, warm white or extra warm white
	Swivel Fixture is horizontally rotatable. Indicated in degrees		Curve Minimal bending curve in centimeters
	Swivel Fixture is vertically rotatable. Indicated in degrees		Cutting length Indicated by the cutting marks
	Multiple connection Daisychain connectivity		LED pitch Pitch between the LEDs in millimeters
	Installation depth In centimeters		Power supply In VDC, VAC or milliAmpere
	Installation size In centimeters		Power consumption In VA or Watt
	Cable length Maximum cable attached to the fixture in centimeters		Dimmable 1-10 Volt, Phase, individual, DMX dimmable or DALI
	Driver Inclusive or exclusive Internal or external		PWM dimming Traditional PWM dimming, DMX analog or DMX Hybrid dim
	Weight In grams/kilograms		Bluetooth controlled By Casambi
	Pressure Maximum pressure on the fixture in kg/cm ²		Magne dimming Accurate dimming from 100 - 1% by using a magnet
	Lifespan Of the light source in hours		Dynamic Control Dynamic Power Control or Dynamic Temperature Control
	Lenses Available lenses, indicated in degrees		DMX input Fixture works on DMX512 protocol or Wireless DMX
	Performance Zoom Adjustable beam angle		Combined product Compose your own fixture
	LEDs Kind of LED used in the fixture		Warranty 3 or 5 years warranty on the product
	Plug & play Easy connection using the SmartConnect system		Conformité Européenne CE marking for free marketability of industrial goods within the EU
	IP value Ingress Protection classifies the degrees of protection provided against the intrusion of the product		Energy label
	Colour changing RGB, RGB-W, RGB-A, AWB or Tunable White		Lightsource Equipped with a CLS, Bridgelux or a Xicato LED module