

LM-79

Test Report

LM79-HYLO-4000K-CRI80-DEG8

General Discription

Item number H-X-X-02-02-5-5

Date and time 29-6-2018 09:50:18

CCT (Kelvin) 3772 K

Beam angle 10,1°

Luminous flux 879 lm

Efficiency 93 lm/watt

Weighted energy 9,4 kWh/1000h

Power factor 0,92

CRI (RA) 83,4


Fidelity index Rf Rf 83,2

Gammut index Rg Rg 98,3


Peak 19359 cd



Polar diagram

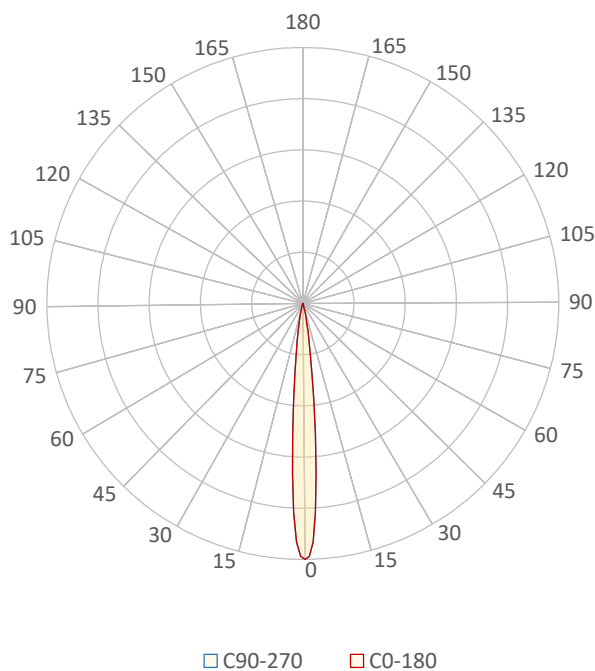

Cartesian diagram

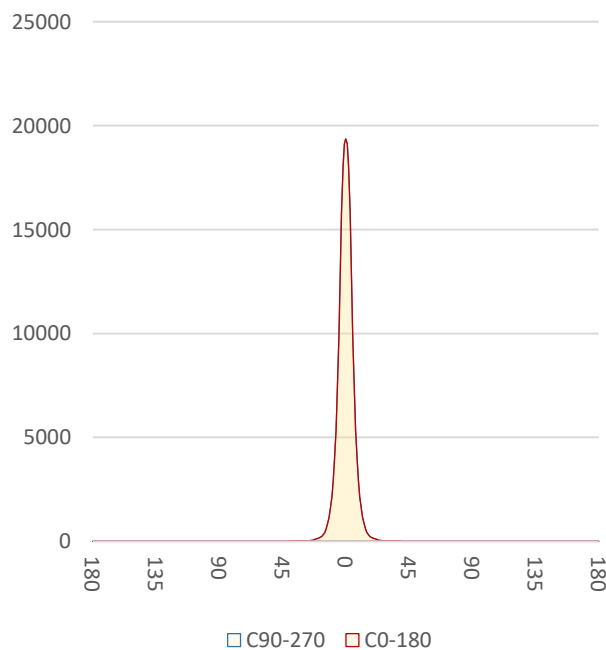

CLS LED BV
info@cls-led.com
www.cls-led.com


2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-HYLO-4000K-CRI80-DEG8

Beam details	1m	2m	3m	4m	5m
Lux*	19359 lx	4840 lx	2151 lx	1210 lx	774 lx

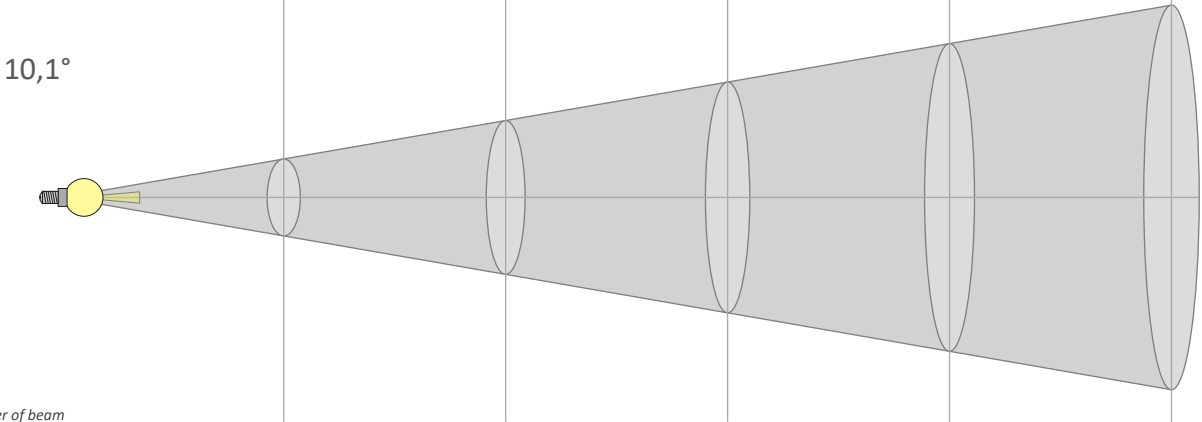

10,1°

*measured at center of beam

Footcandles*	1798,5 fcd	449,6 fcd	199,8 fcd	112,4 fcd	71,9 fcd
Beam width (meter)	0,2 m	0,4 m	0,5 m	0,7 m	0,9 m
Beam width (Feet)	0,6 ft	1,2 ft	1,7 ft	2,3 ft	2,9 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
19359lx	4840lx	2151lx	1210lx	774lx	538lx	395lx	302lx	239lx	194lx	160lx	134lx	115lx	99lx	86lx	76lx	67lx	60lx	54lx	48lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1798,5fcd	449,6fcd	199,8fcd	112,4fcd	71,9fcd	50fcd	36,7fcd	28,1fcd	22,2fcd	18fcd	14,9fcd	12,5fcd	10,6fcd	9,2fcd	8fcd	7fcd	6,2fcd	5,6fcd	5fcd	4,5fcd

Intensities in 0° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
19,4K	19,1K	18,1K	15,8K	12,8K	9,9K	7,3K	5,3K	3,9K	2,9K	2,1K	1,6K	1,1K	0,8K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	93%	82%	66%	51%	38%	28%	20%	15%	11%	8%	6%	4%	3%	2%	2%	1%	1%	1%

Intensities in 90° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
19,4K	19,1K	18,1K	15,8K	12,8K	9,9K	7,3K	5,3K	3,9K	2,9K	2,1K	1,6K	1,1K	0,8K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	93%	82%	66%	51%	38%	28%	20%	15%	11%	8%	6%	4%	3%	2%	2%	1%	1%	1%

Intensities in 180° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
19,4K	19,1K	18,1K	15,8K	12,8K	9,9K	7,3K	5,3K	3,9K	2,9K	2,1K	1,6K	1,1K	0,8K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	93%	82%	66%	51%	38%	28%	20%	15%	11%	8%	6%	4%	3%	2%	2%	1%	1%	1%

Intensities in 270° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
19,4K	19,1K	18,1K	15,8K	12,8K	9,9K	7,3K	5,3K	3,9K	2,9K	2,1K	1,6K	1,1K	0,8K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	93%	82%	66%	51%	38%	28%	20%	15%	11%	8%	6%	4%	3%	2%	2%	1%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
10,1°	20,6°	29,3°	99,0%	98,7%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-HYLO-4000K-CRI80-DEG8

Color details

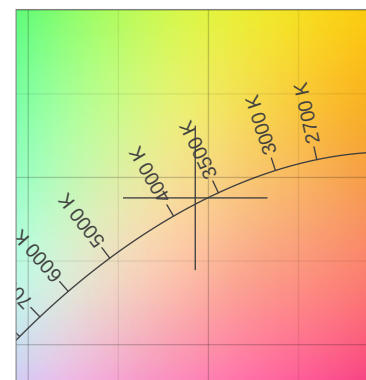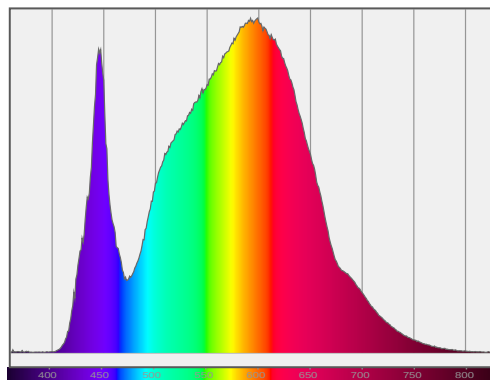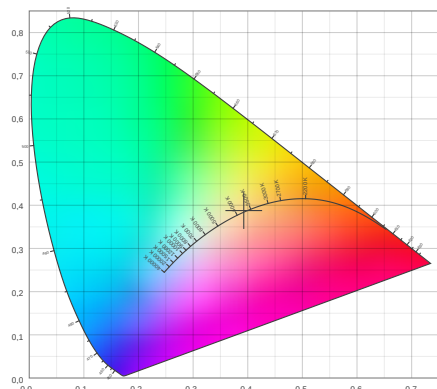

CIE 1931

x: 0,393

3772 K

y: 0,388




Spectra

CIE 1931 ZOOM

Δuv : 0,0017


CRI: **83,4** (R1-R8)

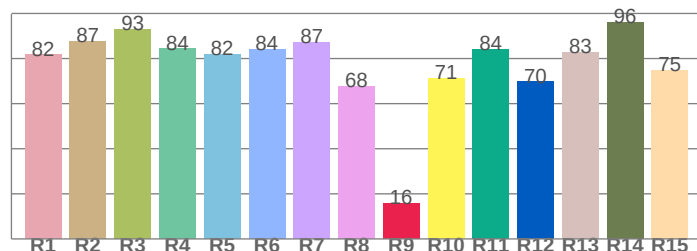

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
81,6	87,5	93,1	84,3	82,0	83,9	87,0	67,7
R9	R10	R11	R12	R13	R14	R15	
15,9	71,3	84,1	69,6	82,6	96,0	74,9	


CQS: **84,0**

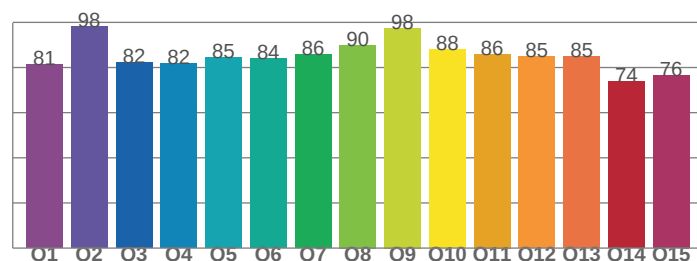

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
81,3	98,3	82,2	81,7	84,6	84,2	85,6	90,0
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
97,5	88,0	86,0	85,0	84,7	73,8	76,4	

TM30: **83,2**

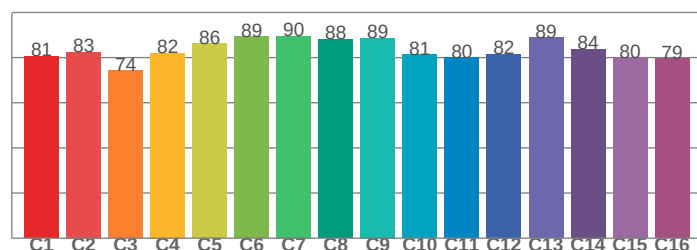

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
80,6	82,5	74,3	82,0	86,3	89,3	89,6	88,2
C9	C10	C11	C12	C13	C14	C15	
88,7	81,2	80,0	81,6	88,9	83,7	80,0	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3772 K	83,4	15,9	83,2	98,3	84,0	0,393	0,388	0,229	0,339	0,0017



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-HYLO-4000K-CRI80-DEG8

TM30 details


Rf 83,2

Fidelity index Rf


Rg 98,3

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	81	-10%	-2%
2	83	-7%	5%
3	74	-3%	12%
4	82	3%	10%
5	86	7%	6%
6	89	6%	-2%
7	90	1%	-6%
8	88	-4%	-5%
9	89	-7%	-2%
10	81	-8%	5%
11	80	-2%	12%
12	82	5%	7%
13	89	6%	-1%
14	84	7%	-9%
15	80	1%	-13%
16	79	-4%	-11%

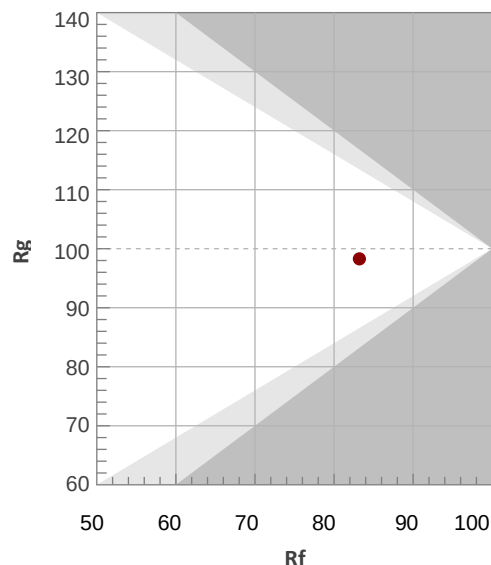


Hue binH

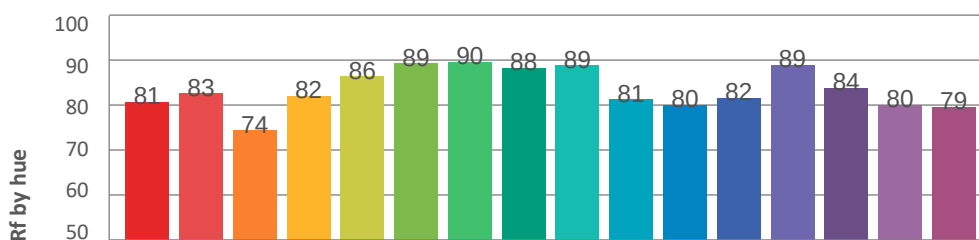

Color vector graphics




Hue bin

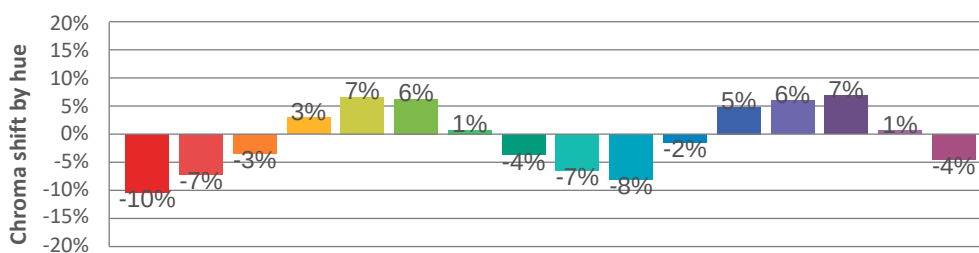

Color distortion graphics



Color Evaluation Sample

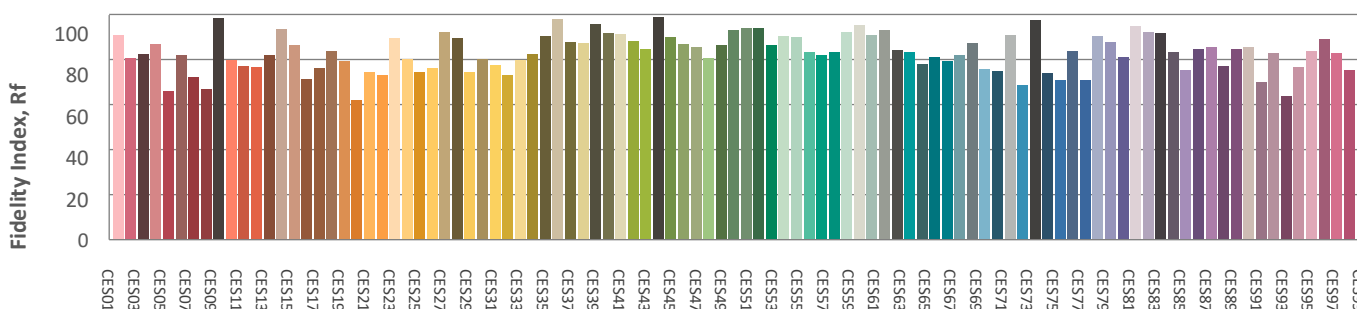

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-HYLO-4000K-CRI80-DEG8

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	-3,2	-2,6	-3,0	-2,4	-2,2	-3,2	-2,6	-3,0	-2,4	-2,2
	3H	-2,3	-1,7	-2,0	-1,4	-1,2	-2,3	-1,7	-2,0	-1,4	-1,2
	4H	-1,6	-1,1	-1,3	-0,8	-0,5	-1,6	-1,1	-1,3	-0,8	-0,5
	6H	-0,5	0,0	-0,2	0,3	0,6	-0,5	0,0	-0,2	0,3	0,6
	8H	0,2	0,7	0,5	1,0	1,3	0,2	0,7	0,5	1,0	1,3
	12H	1,1	1,6	1,5	1,9	2,2	1,1	1,6	1,5	1,9	2,2
4H	2H	-2,9	-2,4	-2,6	-2,1	-1,8	-2,9	-2,4	-2,6	-2,1	-1,8
	3H	-1,7	-1,2	-1,3	-0,9	-0,6	-1,7	-1,2	-1,3	-0,9	-0,6
	4H	-0,8	-0,4	-0,4	-0,1	0,3	-0,8	-0,4	-0,4	-0,1	0,3
	6H	0,7	1,0	1,1	1,4	1,7	0,7	1,0	1,1	1,4	1,7
	8H	1,5	1,8	2,0	2,2	2,6	1,5	1,8	2,0	2,2	2,6
	12H	2,7	2,9	3,1	3,3	3,8	2,7	2,9	3,1	3,3	3,8
8H	4H	-0,3	-0,0	0,1	0,4	0,8	-0,3	-0,0	0,1	0,4	0,8
	6H	1,5	1,7	1,9	2,1	2,6	1,5	1,7	1,9	2,1	2,6
	8H	2,5	2,7	3,0	3,2	3,7	2,5	2,7	3,0	3,2	3,7
	12H	4,0	4,1	4,5	4,6	5,1	4,0	4,1	4,5	4,6	5,1
12H	4H	-0,2	0,1	0,3	0,5	0,9	-0,2	0,1	0,3	0,5	0,9
	6H	1,7	1,9	2,2	2,3	2,8	1,7	1,9	2,2	2,3	2,8
	8H	2,9	3,1	3,4	3,5	4,0	2,9	3,1	3,4	3,5	4,0
Variation of the observer position for the luminaire distance S											
S = 1,0H		+0,6 / -0,3					+0,6 / -0,3				
S = 1,5H		+1,3 / -0,5					+1,3 / -0,5				
S = 2,0H		+2,2 / -0,8					+2,2 / -0,8				
Standard table		---					---				
Correction summand		---					---				
Corrected glare indices referring to 879lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf