

LM-79

Test Report


LM79-JADE-HP-3500K-CRI95-SPOT

General Discription


Item number	
Date and time	22-1-2021 16:28:24
CCT (Kelvin)	3383 K
Beam angle	19,1°
Luminous flux	3129 lm
Efficiency	78 lm/watt
Weighted energy	39,9 kWh/1000h
Power factor	0,98
CRI (RA)	96,9
Fidelity index Rf	Rf 94,8
Gammut index Rg	Rg 103,7
Peak	14254 cd



Polar diagram

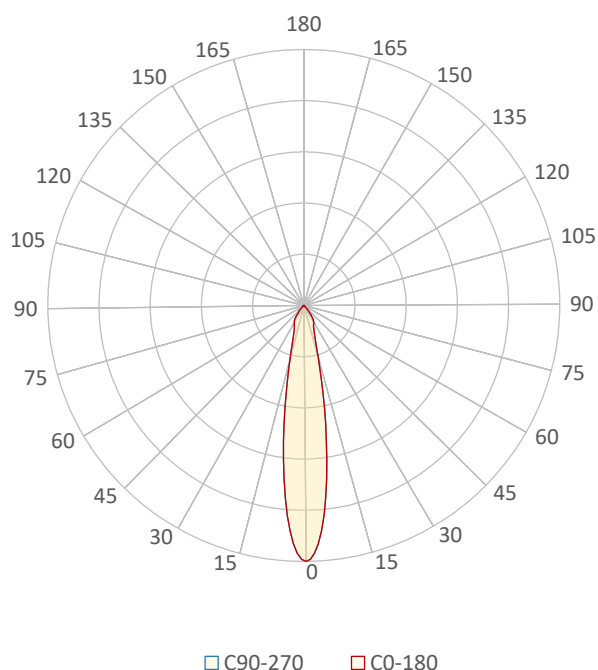

Cartesian diagram

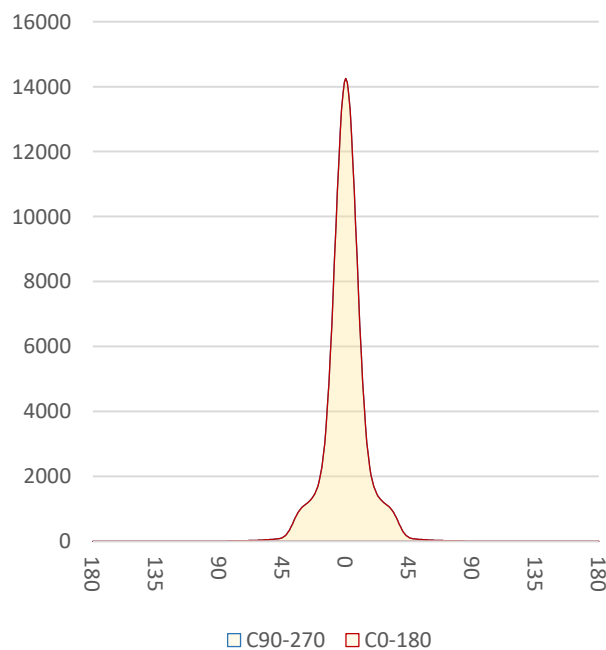

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-HP-3500K-CRI95-SPOT

Beam details	1m	2m	3m	4m	5m
Lux*	14254 lx	3564 lx	1584 lx	891 lx	570 lx

*measured at center of beam

Footcandles*	1324,3 fcd	331,1 fcd	147,1 fcd	82,8 fcd	53,0 fcd
Beam width (meter)	0,3 m	0,7 m	1 m	1,3 m	1,7 m
Beam width (Feet)	1,1 ft	2,2 ft	3,3 ft	4,4 ft	5,5 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
14254lx	3564lx	1584lx	891lx	570lx	396lx	291lx	223lx	176lx	143lx	118lx	99lx	84lx	73lx	63lx	56lx	49lx	44lx	39lx	36lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1324,3fcd	331,1fcd	147,1fcd	82,8fcd	53fcd	36,8fcd	27fcd	20,7fcd	16,3fcd	13,2fcd	10,9fcd	9,2fcd	7,8fcd	6,8fcd	5,9fcd	5,2fcd	4,6fcd	4,1fcd	3,7fcd	3,3fcd

Intensities in 0° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
14,3K	13,8K	12,6K	10,8K	8,7K	6,7K	4,9K	3,6K	2,6K	2,0K	1,7K	1,5K	1,3K	1,2K	1,2K	1,1K	1,0K	0,9K	0,7K	0,5K
100%	97%	88%	76%	61%	47%	34%	25%	18%	14%	12%	10%	9%	9%	8%	8%	7%	6%	5%	4%

Intensities in 90° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
14,3K	13,8K	12,6K	10,8K	8,7K	6,7K	4,9K	3,6K	2,6K	2,0K	1,7K	1,5K	1,3K	1,2K	1,2K	1,1K	1,0K	0,9K	0,7K	0,5K
100%	97%	88%	76%	61%	47%	34%	25%	18%	14%	12%	10%	9%	9%	8%	8%	7%	6%	5%	4%

Intensities in 180° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
14,3K	13,8K	12,6K	10,8K	8,7K	6,7K	4,9K	3,6K	2,6K	2,0K	1,7K	1,5K	1,3K	1,2K	1,2K	1,1K	1,0K	0,9K	0,7K	0,5K
100%	97%	88%	76%	61%	47%	34%	25%	18%	14%	12%	10%	9%	9%	8%	8%	7%	6%	5%	4%

Intensities in 270° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
14,3K	13,8K	12,6K	10,8K	8,7K	6,7K	4,9K	3,6K	2,6K	2,0K	1,7K	1,5K	1,3K	1,2K	1,2K	1,1K	1,0K	0,9K	0,7K	0,5K
100%	97%	88%	76%	61%	47%	34%	25%	18%	14%	12%	10%	9%	9%	8%	8%	7%	6%	5%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
19,1°	45,1°	80°	98,5%	95,9%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-HP-3500K-CRI95-SPOT

Color details

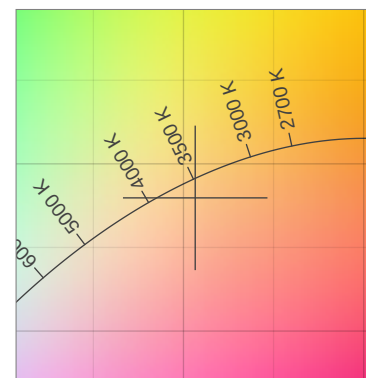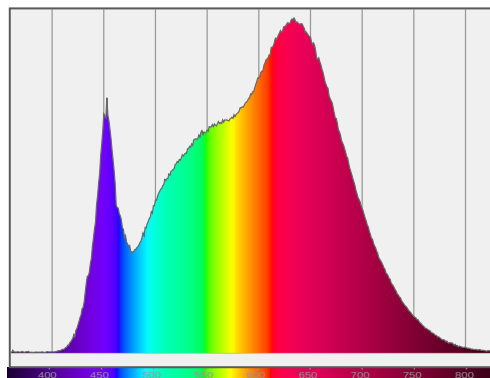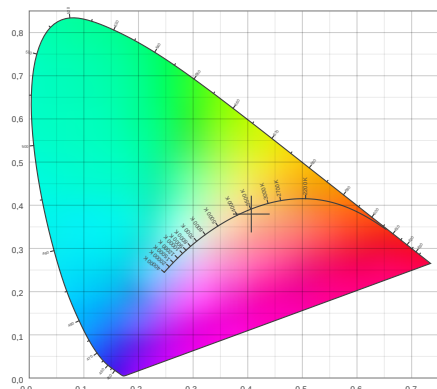

CIE 1931

x: 0,407



Spectra

CIE 1931 ZOOM


3383 K

y: 0,380

Δuv : -0,0052

CRI: 96,9 (R1-R8)


CRI values, R1-R8 are used to calculate final CRI value

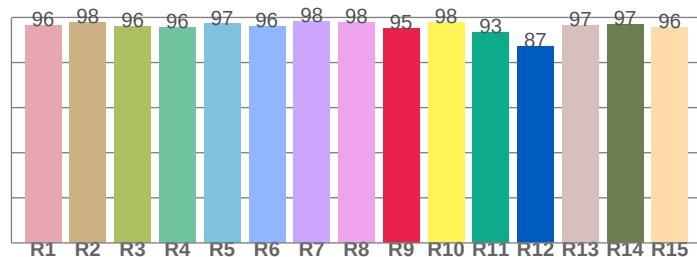

R1	R2	R3	R4	R5	R6	R7	R8
96,4	98,0	96,0	95,8	97,1	96,0	98,1	98,0
R9	R10	R11	R12	R13	R14	R15	
95,3	97,8	93,5	87,0	96,5	96,9	95,7	

CQS: 95,4


CQS values

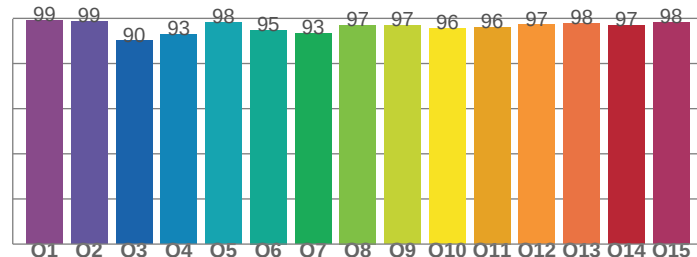

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
99,2	98,8	90,0	92,8	98,1	94,9	93,4	97,1
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
97,0	95,7	96,2	97,1	97,8	96,8	98,3	

TM30: 94,8

TM30 values, 16 binned values out of total of 99 values

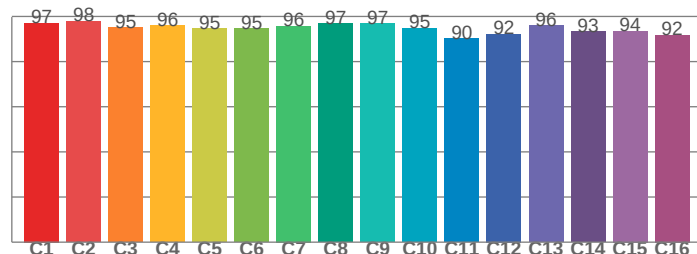

C1	C2	C3	C4	C5	C6	C7	C8
97,1	97,9	95,1	96,0	94,5	94,6	95,8	96,9
C9	C10	C11	C12	C13	C14	C15	
96,7	94,8	90,2	92,2	96,0	93,2	93,5	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3383 K	96,9	95,3	94,8	103,7	95,4	0,407	0,380	0,241	0,338	-0,0052



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-HP-3500K-CRI95-SPOT

TM30 details


Rf 94,8

Fidelity index Rf


Rg 103,7

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	97	0%	0%
2	98	0%	0%
3	95	1%	2%
4	96	0%	1%
5	95	0%	1%
6	95	4%	1%
7	96	1%	0%
8	97	1%	-1%
9	97	1%	2%
10	95	0%	3%
11	90	2%	6%
12	92	5%	2%
13	96	3%	0%
14	93	6%	-1%
15	94	3%	-2%
16	92	3%	-4%

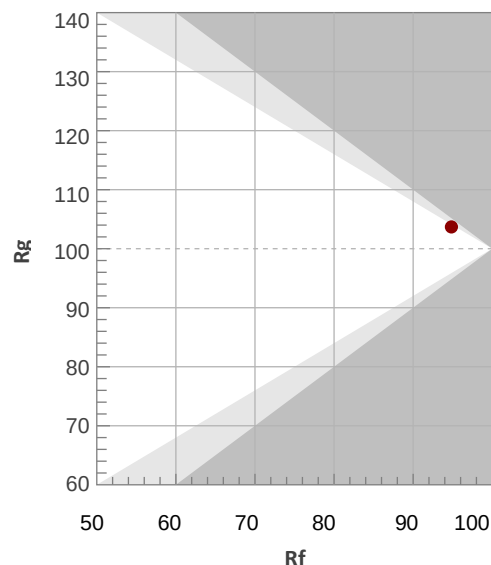


Hue binH

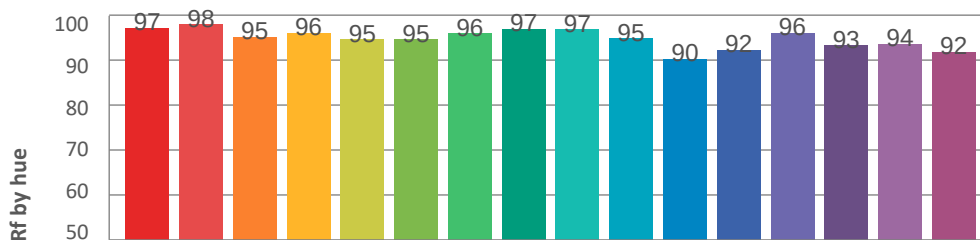

Color vector graphics




Hue bin

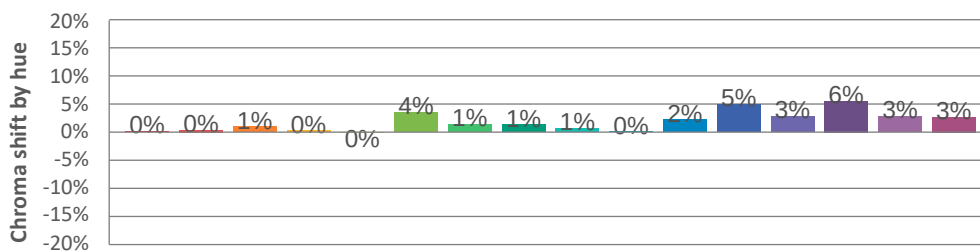

Color distortion graphics



Color Evaluation Sample

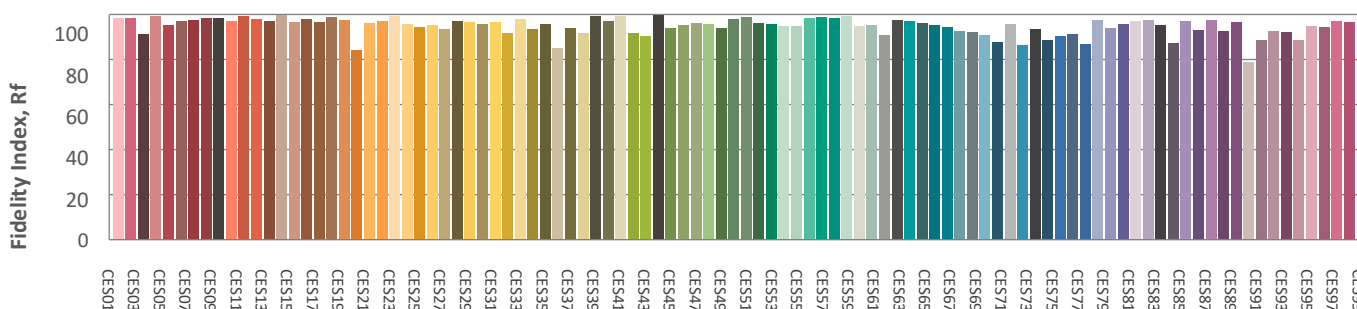

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-HP-3500K-CRI95-SPOT

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,8	22,3	21,8	22,5	22,7	21,8	22,3	21,8	22,5	22,7
	3H	21,7	22,4	22,0	22,5	22,7	21,7	22,4	22,0	22,5	22,7
	4H	21,7	22,4	22,1	22,6	22,8	21,7	22,4	22,1	22,6	22,8
	6H	21,8	22,3	22,1	22,6	23,0	21,8	22,3	22,1	22,6	23,0
	8H	21,8	22,3	22,1	22,6	23,0	21,8	22,3	22,1	22,6	23,0
	12H	21,7	22,2	22,1	22,6	23,0	21,7	22,2	22,1	22,6	23,0
4H	2H	21,5	22,1	21,9	22,4	22,6	21,5	22,1	21,9	22,4	22,6
	3H	21,7	22,2	22,1	22,6	23,0	21,7	22,2	22,1	22,6	23,0
	4H	21,7	22,2	22,2	22,6	23,2	21,7	22,2	22,2	22,6	23,2
	6H	21,8	22,3	22,3	22,7	23,0	21,8	22,3	22,3	22,7	23,0
	8H	21,8	22,3	22,3	22,6	23,0	21,8	22,3	22,3	22,6	23,0
	12H	21,7	22,1	22,2	22,5	23,0	21,7	22,1	22,2	22,5	23,0
8H	4H	21,7	22,2	22,2	22,5	22,9	21,7	22,2	22,2	22,5	22,9
	6H	21,8	22,1	22,3	22,6	23,1	21,8	22,1	22,3	22,6	23,1
	8H	21,9	22,1	22,4	22,6	23,3	21,9	22,1	22,4	22,6	23,3
	12H	21,8	22,1	22,4	22,6	23,2	21,8	22,1	22,4	22,6	23,2
12H	4H	21,7	22,0	22,2	22,4	22,9	21,7	22,0	22,2	22,4	22,9
	6H	21,8	22,1	22,4	22,6	23,2	21,8	22,1	22,4	22,6	23,2
	8H	21,8	22,0	22,4	22,5	23,1	21,8	22,0	22,4	22,5	23,1
Variation of the observer position for the luminaire distance S											
S = 1.0H		4,0 / -3,6					4,0 / -3,6				
S = 1.5H		6,5 / -4,1					6,5 / -4,1				
S = 2.0H		8,4 / -4,4					8,4 / -4,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 3129lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf