

LM-79

Test Report


LM79-JADE-ZOOM-TW-2700K-6500K-THRIVE-WIDE
[3000K]

General Description


Item number	
Date and time	21-9-2021 14:35:34
CCT (Kelvin)	3063 K
Beam angle	57,2°
Luminous flux	645 lm
Efficiency	39 lm/watt
Weighted energy	16,5 kWh/1000h
Power factor	0,55
CRI (RA)	97,1
Fidelity index Rf	Rf 96,9
Gammut index Rg	Rg 102,7
Peak	856 cd



Polar diagram

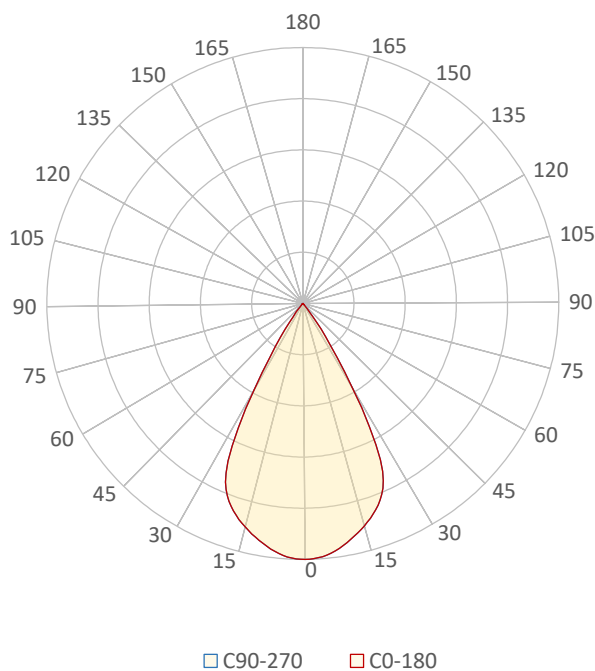

Cartesian diagram

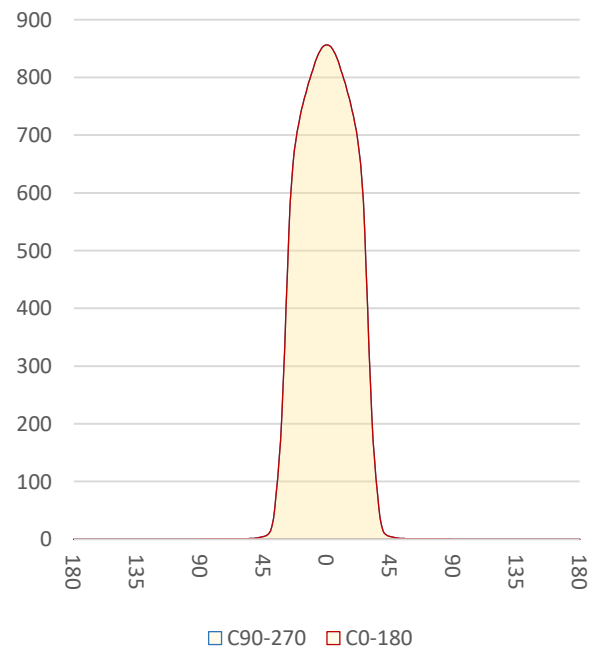

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-ZOOM-TW-2700K-6500K-THRIVE-WIDE [3000K]

Beam details	1m	2m	3m	4m	5m																			
Lux*	856 lx	214 lx	95 lx	54 lx	34 lx																			
*measured at center of beam																								
Footcandles*	79,6 fcd	19,9 fcd	8,8 fcd	5,0 fcd	3,2 fcd																			
Beam width (meter)	1,1 m	2,2 m	3,3 m	4,4 m	5,5 m																			
Beam width (Feet)	3,6 ft	7,2 ft	10,7 ft	14,3 ft	17,9 ft																			
Beam intensities																								
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m					
856lx	214lx	95lx	54lx	34lx	24lx	17lx	13lx	11lx	9lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx	2lx					
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft					
79,6fcd	19,9fcd	8,8fcd	5fcd	3,2fcd	2,2fcd	1,6fcd	1,2fcd	1fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd					
Intensities in 0° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
856	855	850	841	828	814	798	781	763	743	720	692	651	583	470	331	214	135	78	36					
100%	100%	99%	98%	97%	95%	93%	91%	89%	87%	84%	81%	76%	68%	55%	39%	25%	16%	9%	4%					
Intensities in 90° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
856	855	850	841	828	814	798	781	763	743	720	692	651	583	470	331	214	135	78	36					
100%	100%	99%	98%	97%	95%	93%	91%	89%	87%	84%	81%	76%	68%	55%	39%	25%	16%	9%	4%					
Intensities in 180° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
856	855	850	841	828	814	798	781	763	743	720	692	651	583	470	331	214	135	78	36					
100%	100%	99%	98%	97%	95%	93%	91%	89%	87%	84%	81%	76%	68%	55%	39%	25%	16%	9%	4%					
Intensities in 270° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
856	855	850	841	828	814	798	781	763	743	720	692	651	583	470	331	214	135	78	36					
100%	100%	99%	98%	97%	95%	93%	91%	89%	87%	84%	81%	76%	68%	55%	39%	25%	16%	9%	4%					
Beam angle 50%					Field angle 10%					Cutoff angle 2,5%					Intensity ratio in 120° cone					Intensity ratio in 90° cone				
57,2°					71,4°					78,3°					99,7%					99,3%				



CLS LED BV
info@cls-led.com
www.cls-led.com




2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-ZOOM-TW-2700K-6500K-THRIVE-WIDE [3000K]

Color details

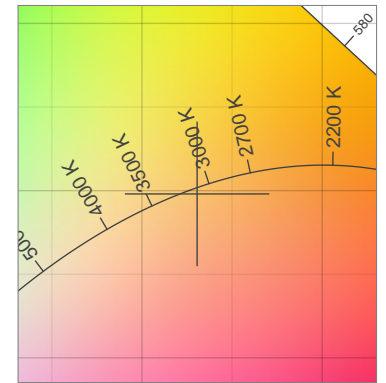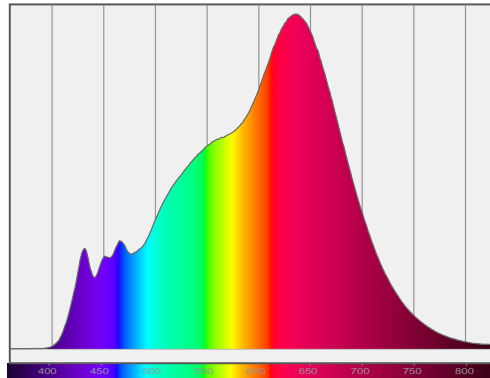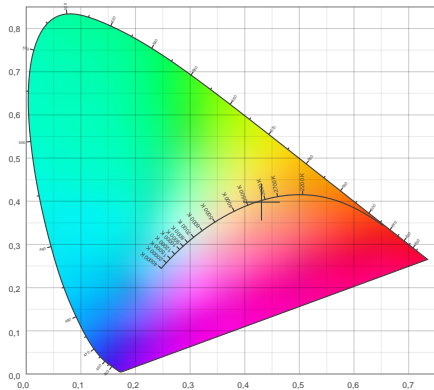

CIE 1931

x: 0,431



Spectra

CIE 1931 ZOOM


3063 K

y: 0,398

$\Delta uv: -0,0015$

CRI: 97,1 (R1-R8)


CRI values, R1-R8 are used to calculate final CRI value

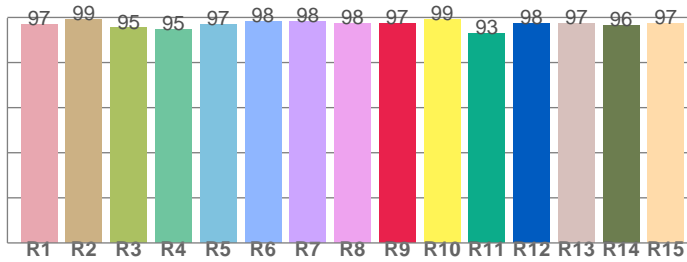

R1	R2	R3	R4	R5	R6	R7	R8
96,8	99,2	95,4	94,9	96,9	98,1	98,1	97,5
R9	R10	R11	R12	R13	R14	R15	
97,4	99,0	93,0	97,6	97,3	96,3	97,2	

CQS: 96,2


CQS values

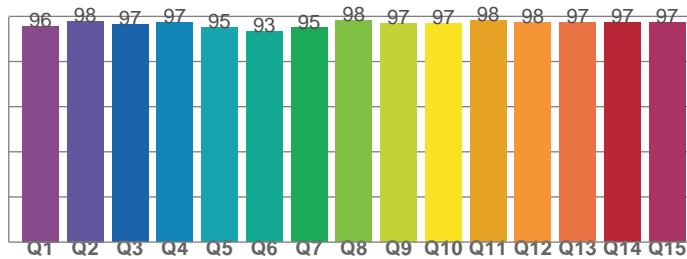

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
95,8	97,9	96,6	97,2	95,2	93,3	94,9	98,2
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
96,8	96,7	98,2	97,5	97,2	97,2	97,4	

TM30: 96,9

TM30 values, 16 binned values out of total of 99 values

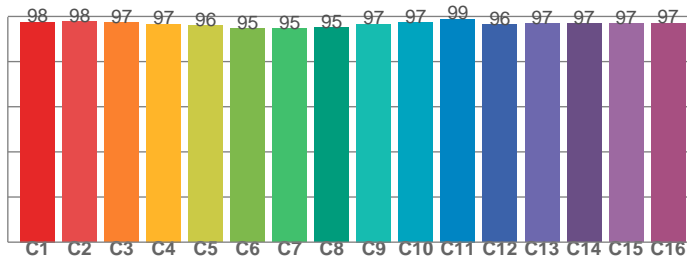

C1	C2	C3	C4	C5	C6	C7	C8
97,6	97,8	97,4	96,7	96,1	94,7	94,7	95,2
C9	C10	C11	C12	C13	C14	C15	
96,7	97,4	98,9	96,4	97,0	96,9	96,9	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3063 K	97,1	97,4	96,9	102,7	96,2	0,431	0,398	0,249	0,345	-0,0015



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-ZOOM-TW-2700K-6500K-THRIVE-WIDE [3000K]

TM30 details


Rf 96,9

Fidelity index Rf


Rg 102,7

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	98	0%	-1%
2	98	1%	0%
3	97	1%	1%
4	97	2%	2%
5	96	3%	2%
6	95	3%	1%
7	95	3%	-1%
8	95	2%	-2%
9	97	1%	-2%
10	97	0%	-1%
11	99	0%	0%
12	96	1%	-1%
13	97	2%	-1%
14	97	1%	0%
15	97	1%	-1%
16	97	1%	-2%

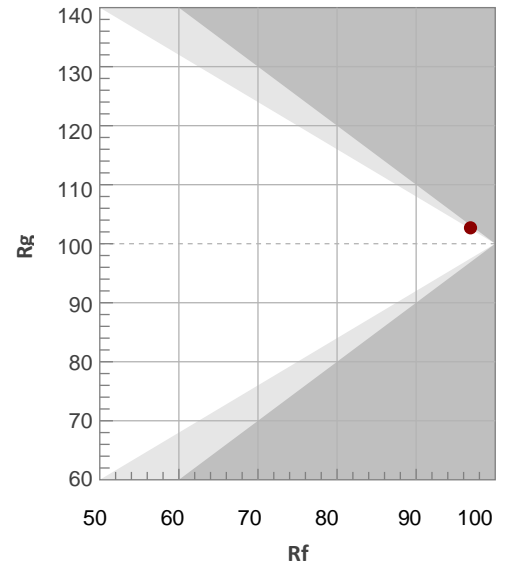


Hue binH

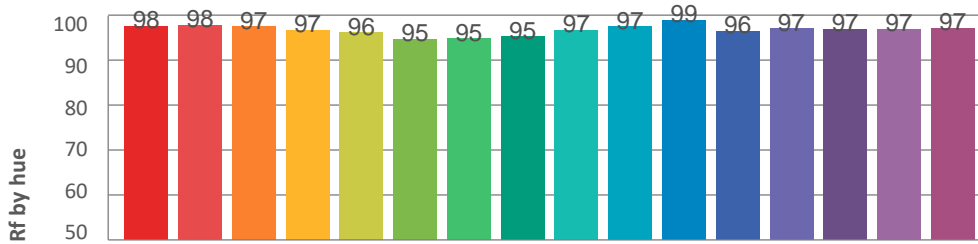

Color vector graphics




Hue bin

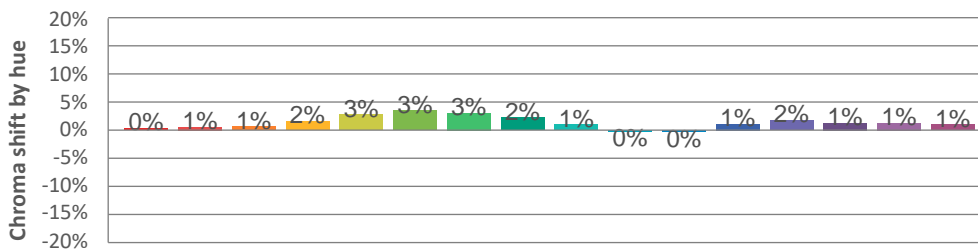

Color distortion graphics



Color Evaluation Sample

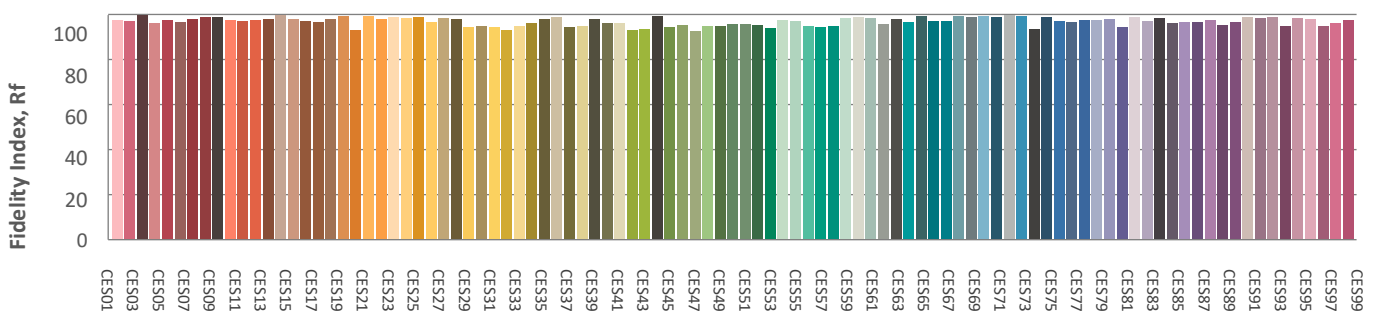

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-JADE-ZOOM-TW-2700K-6500K-THRIVE-WIDE [3000K]

Glare Evaluation According to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	13,7	14,3	13,8	14,5	14,7	13,7	14,3	13,8	14,5	14,7
	3H	13,5	14,2	13,8	14,4	14,5	13,5	14,2	13,8	14,4	14,5
	4H	13,4	14,1	13,8	14,3	14,5	13,4	14,1	13,8	14,3	14,5
	6H	13,4	14,0	13,7	14,2	14,6	13,4	14,0	13,7	14,2	14,6
	8H	13,3	13,9	13,7	14,2	14,6	13,3	13,9	13,7	14,2	14,6
	12H	13,3	13,8	13,6	14,2	14,6	13,3	13,8	13,6	14,2	14,6
4H	2H	13,4	14,1	13,8	14,3	14,5	13,4	14,1	13,8	14,3	14,5
	3H	13,3	13,8	13,6	14,2	14,6	13,3	13,8	13,6	14,2	14,6
	4H	13,2	13,6	13,6	14,1	14,6	13,2	13,6	13,6	14,1	14,6
	6H	13,1	13,6	13,6	13,9	14,3	13,1	13,6	13,6	13,9	14,3
	8H	13,0	13,5	13,5	13,9	14,2	13,0	13,5	13,5	13,9	14,2
	12H	13,0	13,3	13,5	13,8	14,2	13,0	13,3	13,5	13,8	14,2
8H	4H	13,0	13,5	13,5	13,8	14,2	13,0	13,5	13,5	13,8	14,2
	6H	13,0	13,3	13,5	13,7	14,3	13,0	13,3	13,5	13,7	14,3
	8H	13,0	13,2	13,5	13,7	14,4	13,0	13,2	13,5	13,7	14,4
	12H	12,9	13,1	13,5	13,6	14,2	12,9	13,1	13,5	13,6	14,2
12H	4H	13,0	13,3	13,5	13,7	14,2	13,0	13,3	13,5	13,7	14,2
	6H	13,0	13,2	13,5	13,7	14,4	13,0	13,2	13,5	13,7	14,4
	8H	12,9	13,1	13,5	13,6	14,2	12,9	13,1	13,5	13,6	14,2
Variation of the observer position for the luminaire distance S											
S = 1.0H	6,5 / -11,8					6,5 / -11,8					
S = 1.5H	9,3 / -12,0					9,3 / -12,0					
S = 2.0H	11,3 / -12,1					11,3 / -12,1					
Standard table	n/a					n/a					
Correction summand	n/a					n/a					
Corrected glare indices referring to 645lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf