

LM-79

Test Report


LM79-MIKA-2700K-CRI80-FLOOD

General Discription


Item number	M-XXX-3-1-2780-3
Date and time	28-11-2016 09:42:15
CCT (Kelvin)	2715 K
Beam angle	65,2°
Luminous flux	2827 lm
Efficiency	101 lm/watt
Weighted energy	27,9 kWh/1000h
Power factor	0,95
CRI (RA)	81,6
Fidelity index Rf	Rf 81,9
Gammut index Rg	Rg 96,8
Peak	2632 cd



Polar diagram

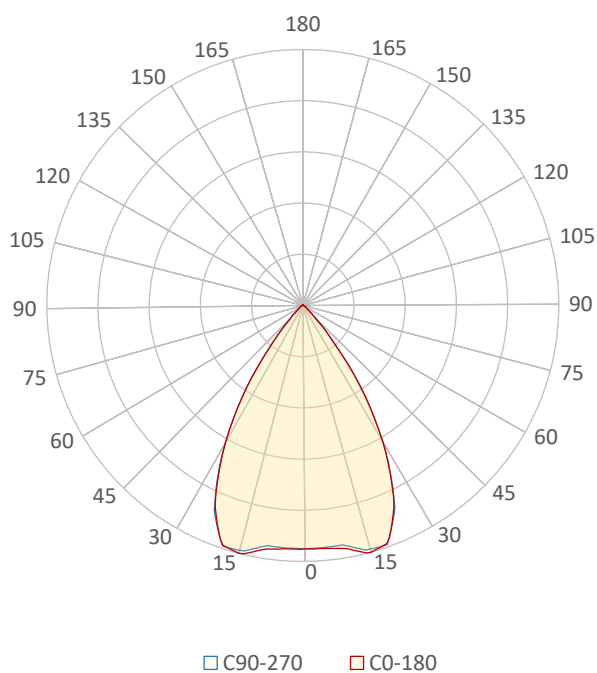

Cartesian diagram

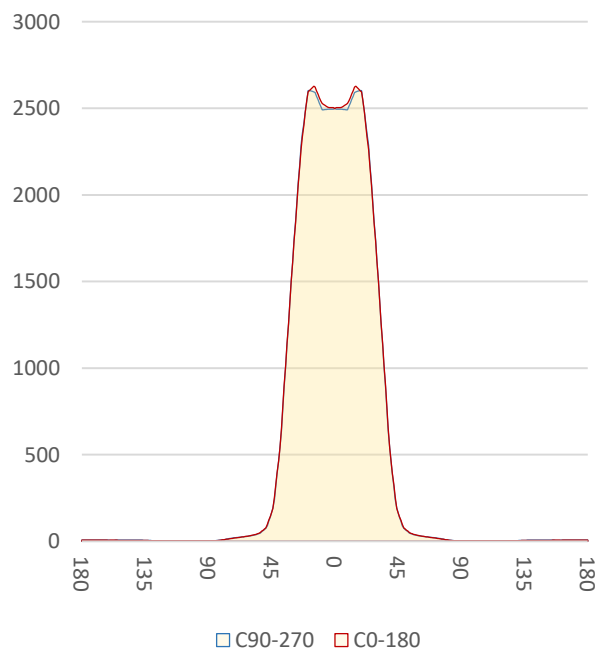

CLS LED BV
info@cls-led.com
www.cls-led.com


2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI80-FLOOD

Beam details	1m	2m	3m	4m	5m
Lux*	2499 lx	625 lx	278 lx	156 lx	100 lx

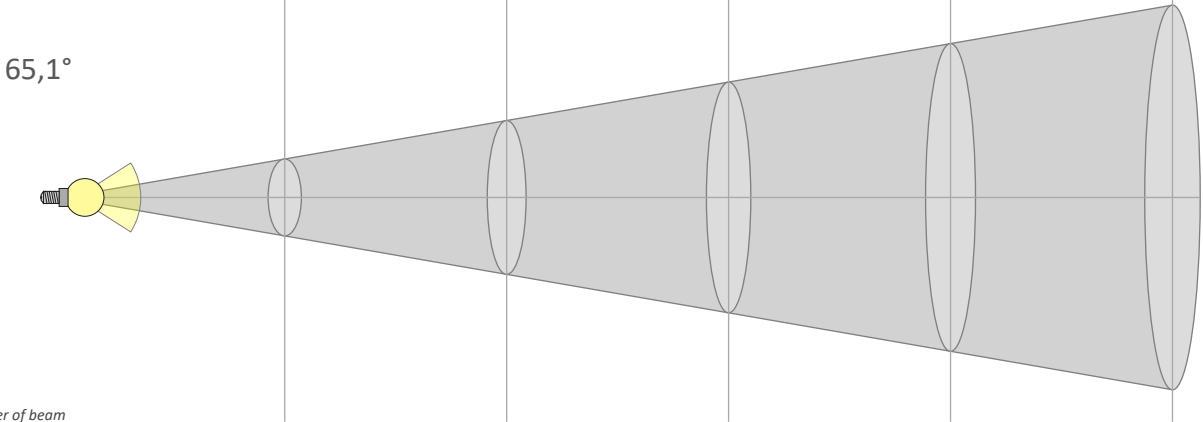

*measured at center of beam

Footcandles*	232,2 fcd	58,0 fcd	25,8 fcd	14,5 fcd	9,3 fcd
Beam width (meter)	1,3 m	2,6 m	3,8 m	5,1 m	6,4 m
Beam width (Feet)	4,2 ft	8,4 ft	12,6 ft	16,8 ft	20,9 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
2499lx	625lx	278lx	156lx	100lx	69lx	51lx	39lx	31lx	25lx	21lx	17lx	15lx	13lx	11lx	10lx	9lx	8lx	7lx	6lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
232,2fcd	58fcd	25,8fcd	14,5fcd	9,3fcd	6,4fcd	4,7fcd	3,6fcd	2,9fcd	2,3fcd	1,9fcd	1,6fcd	1,4fcd	1,2fcd	1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,6fcd

Intensities in 0° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2499	2504	2504	2512	2523	2541	2582	2622	2619	2603	2548	2405	2262	2057	1841	1616	1378	1141	900	658
100%	100%	100%	100%	101%	102%	103%	105%	105%	104%	102%	96%	91%	82%	74%	65%	55%	46%	36%	26%

Intensities in 90° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2499	2495	2495	2493	2492	2509	2551	2592	2598	2603	2540	2416	2285	2068	1851	1617	1374	1130	886	642
100%	100%	100%	100%	100%	100%	102%	104%	104%	104%	102%	97%	91%	83%	74%	65%	55%	45%	35%	26%

Intensities in 180° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2499	2504	2504	2512	2523	2541	2582	2622	2619	2603	2548	2405	2262	2057	1841	1616	1378	1141	900	658
100%	100%	100%	100%	101%	102%	103%	105%	105%	104%	102%	96%	91%	82%	74%	65%	55%	46%	36%	26%

Intensities in 270° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2499	2495	2495	2493	2492	2509	2551	2592	2598	2603	2540	2416	2285	2068	1851	1617	1374	1130	886	642
100%	100%	100%	100%	100%	100%	102%	104%	104%	104%	102%	97%	91%	83%	74%	65%	55%	45%	35%	26%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
65,1°	85,7°	101,3°	97,6%	94,7%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI80-FLOOD

Color details

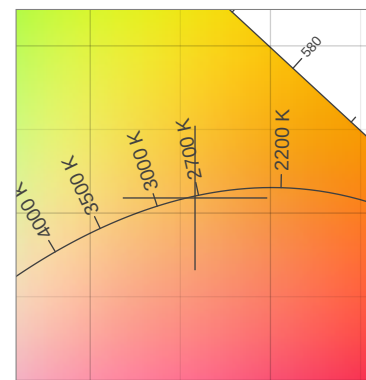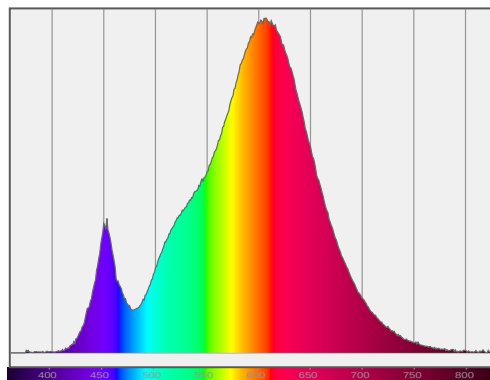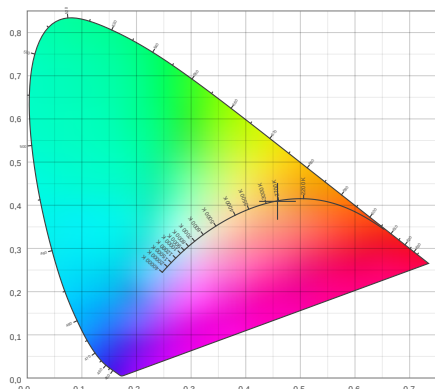

CIE 1931

x: 0,458



Spectra


CIE 1931 ZOOM

2715 K

y: 0,409

Δuv : -0,0005


CRI: 81,6 (R1-R8)

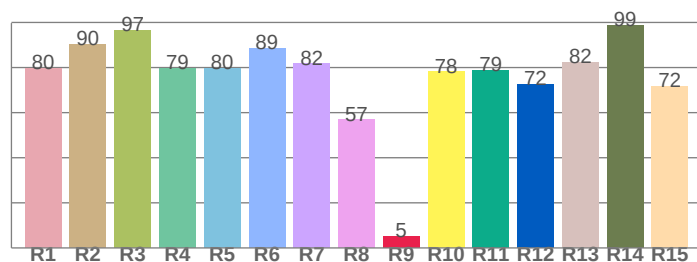

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
79,8	90,2	96,6	79,5	79,7	88,6	81,6	56,8
R9	R10	R11	R12	R13	R14	R15	
5,3	78,1	78,7	72,4	82,2	98,8	71,7	


CQS: 80,6

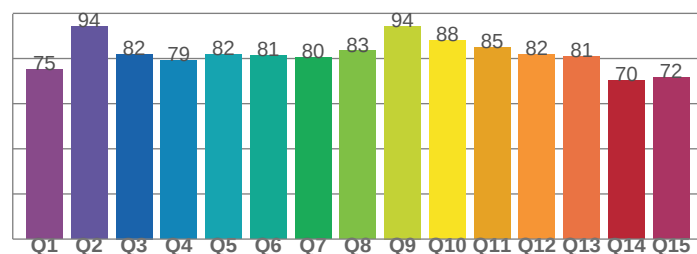

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
75,2	94,2	82,0	79,3	81,7	81,3	80,5	83,4
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
94,4	88,1	84,8	81,9	81,0	70,2	71,6	

TM30: 81,9

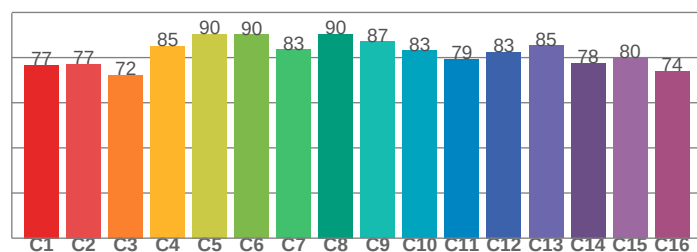

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
76,7	77,2	72,3	85,0	90,5	90,2	83,5	90,5
C9	C10	C11	C12	C13	C14	C15	
87,2	83,1	79,4	82,5	85,3	77,6	80,0	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2715 K	81,6	5,3	81,9	96,8	80,6	0,458	0,409	0,262	0,351	-0,0005



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI80-FLOOD

TM30 details


Rf 81,9

Fidelity index Rf


Rg 96,8

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	77	-12%	-1%
2	77	-9%	8%
3	72	-3%	13%
4	85	3%	8%
5	90	5%	5%
6	90	5%	-2%
7	83	-1%	-10%
8	90	-4%	-4%
9	87	-7%	0%
10	83	-6%	8%
11	79	-2%	13%
12	83	6%	4%
13	85	6%	-7%
14	78	6%	-15%
15	80	-2%	-11%
16	74	-9%	-16%

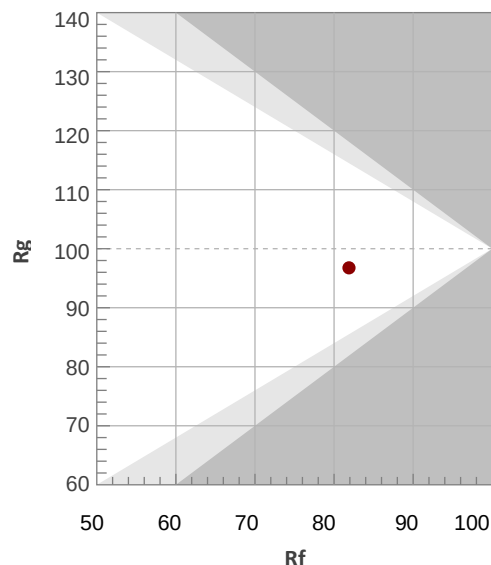


Hue binH

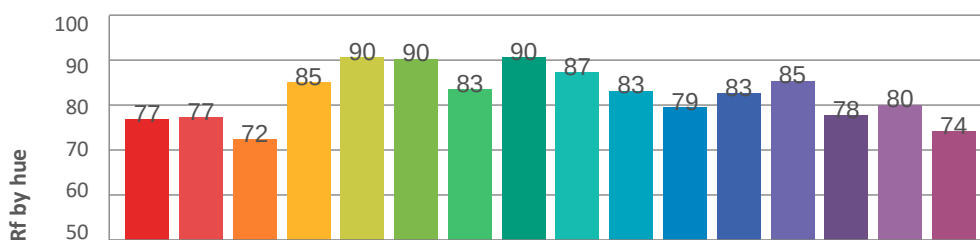


Color vector graphics




Hue bin

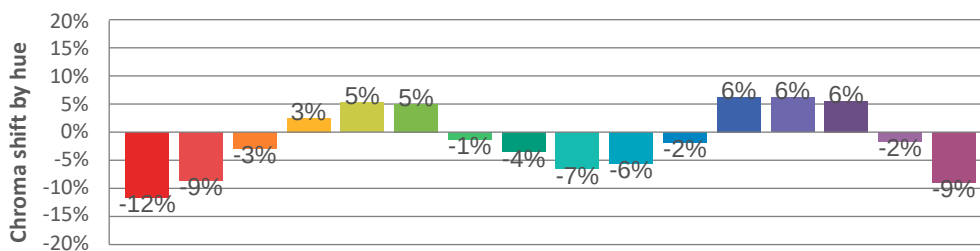

Color distortion graphics



Color Evaluation Sample

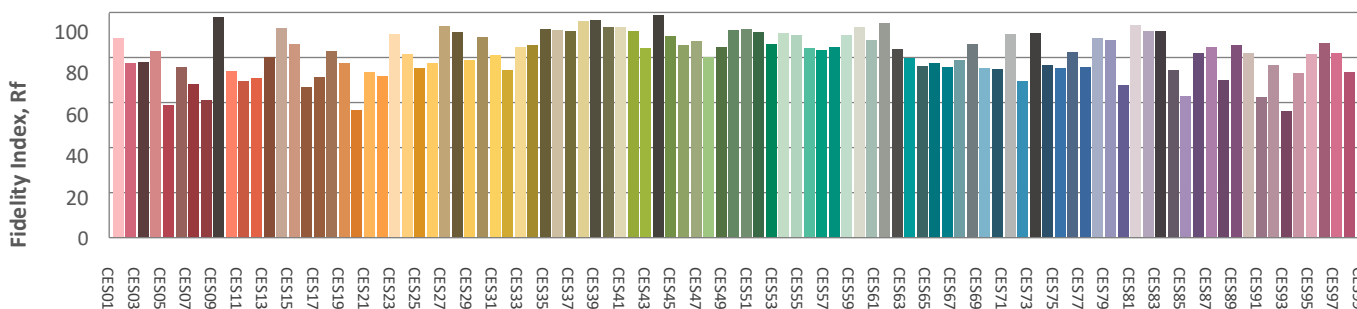

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI80-FLOOD

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23,8	24,5	24,1	24,7	24,9	23,8	24,5	24,0	24,7	24,9
	3H	23,8	24,4	24,1	24,7	24,9	23,8	24,4	24,1	24,7	24,9
	4H	23,8	24,4	24,1	24,7	24,9	23,8	24,4	24,1	24,7	24,9
	6H	23,8	24,3	24,1	24,6	24,9	23,8	24,3	24,1	24,6	24,9
	8H	23,8	24,3	24,1	24,6	24,9	23,8	24,3	24,1	24,6	24,9
	12H	23,7	24,2	24,1	24,6	24,9	23,7	24,2	24,1	24,6	24,9
4H	2H	23,7	24,3	24,0	24,5	24,8	23,6	24,2	23,9	24,5	24,8
	3H	23,7	24,2	24,0	24,5	24,8	23,7	24,2	24,0	24,5	24,8
	4H	23,7	24,2	24,1	24,5	24,9	23,7	24,2	24,1	24,5	24,9
	6H	23,7	24,1	24,2	24,5	24,9	23,8	24,1	24,2	24,5	24,9
	8H	23,7	24,1	24,2	24,5	24,9	23,8	24,1	24,2	24,5	24,9
	12H	23,7	24,0	24,2	24,4	24,9	23,8	24,0	24,2	24,4	24,9
8H	4H	23,7	24,0	24,1	24,4	24,8	23,7	24,0	24,1	24,4	24,8
	6H	23,7	24,0	24,2	24,4	24,9	23,7	24,0	24,2	24,4	24,9
	8H	23,7	23,9	24,2	24,4	24,9	23,7	24,0	24,2	24,4	24,9
	12H	23,7	23,9	24,2	24,4	24,9	23,8	23,9	24,3	24,4	24,9
12H	4H	23,6	23,9	24,1	24,3	24,8	23,6	23,9	24,1	24,3	24,8
	6H	23,7	23,9	24,2	24,4	24,8	23,7	23,9	24,2	24,4	24,8
	8H	23,7	23,9	24,2	24,4	24,9	23,7	23,9	24,2	24,4	24,9
Variation of the observer position for the luminaire distance S											
S = 1,0H		+4,2 / -5,1					+4,2 / -5,0				
S = 1,5H		+6,9 / -5,6					+6,9 / -5,5				
S = 2,0H		+8,9 / -6,0					+8,8 / -5,8				
Standard table		BK01					BK01				
Correction summand		5,8					5,8				
Corrected glare indices referring to 2827lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf