

LM-79

Test Report


LM79-MIKA-2700K-CRI90-MEDIUM

General Discription


Item number	M-XXX-3-1-2790-2
Date and time	27-1-2017 13:50:50
CCT (Kelvin)	2779 K
Beam angle	37,6°
Luminous flux	2524 lm
Efficiency	90 lm/watt
Weighted energy	28,1 kWh/1000h
Power factor	0,95
CRI (RA)	93,2
Fidelity index Rf	Rf 91,3
Gammut index Rg	Rg 100,5
Peak	4586 cd



Polar diagram

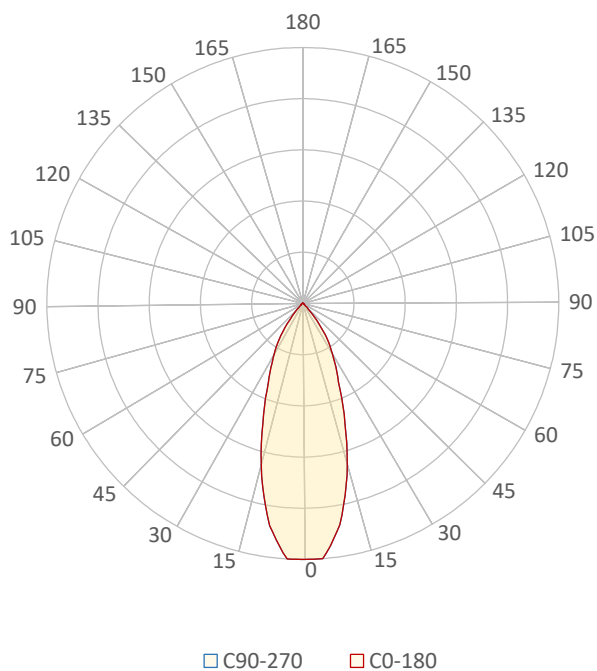

Cartesian diagram

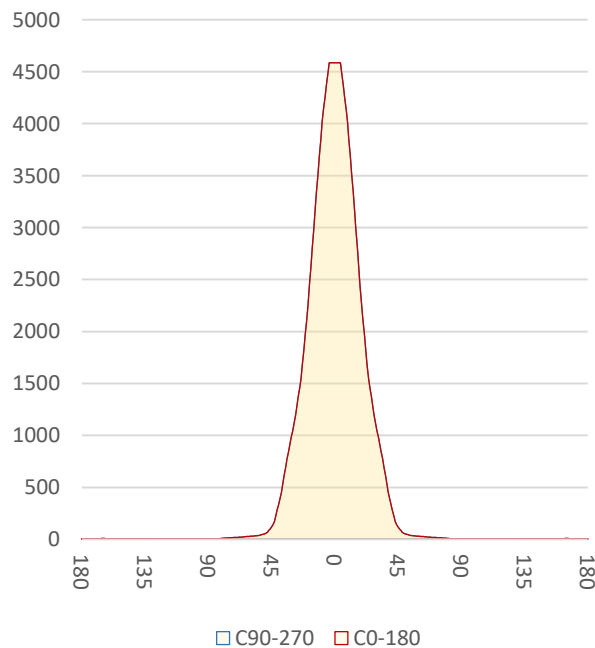

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI90-MEDIUM

Beam details	1m	2m	3m	4m	5m
Lux*	4586 lx	1146 lx	510 lx	287 lx	183 lx

37,6°

*measured at center of beam

Footcandles*	426,0 fcd	106,5 fcd	47,3 fcd	26,6 fcd	17,0 fcd
Beam width (meter)	0,7 m	1,4 m	2 m	2,7 m	3,4 m
Beam width (Feet)	2,2 ft	4,5 ft	6,7 ft	8,9 ft	11,2 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
4586lx	1146lx	510lx	287lx	183lx	127lx	94lx	72lx	57lx	46lx	38lx	32lx	27lx	23lx	20lx	18lx	16lx	14lx	13lx	11lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
426fcd	106,5fcd	47,3fcd	26,6fcd	17fcd	11,8fcd	8,7fcd	6,7fcd	5,3fcd	4,3fcd	3,5fcd	3fcd	2,5fcd	2,2fcd	1,9fcd	1,7fcd	1,5fcd	1,3fcd	1,2fcd	1,1fcd

Intensities in 0° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4586	4586	4586	4369	4138	3854	3513	3172	2807	2441	2118	1826	1547	1370	1194	1045	911	772	614	455
100%	100%	100%	95%	90%	84%	77%	69%	61%	53%	46%	40%	34%	30%	26%	23%	20%	17%	13%	10%

Intensities in 90° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4586	4586	4586	4369	4138	3854	3513	3172	2807	2441	2118	1826	1547	1370	1194	1045	911	772	614	455
100%	100%	100%	95%	90%	84%	77%	69%	61%	53%	46%	40%	34%	30%	26%	23%	20%	17%	13%	10%

Intensities in 180° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4586	4586	4586	4369	4138	3854	3513	3172	2807	2441	2118	1826	1547	1370	1194	1045	911	772	614	455
100%	100%	100%	95%	90%	84%	77%	69%	61%	53%	46%	40%	34%	30%	26%	23%	20%	17%	13%	10%

Intensities in 270° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
4586	4586	4586	4369	4138	3854	3513	3172	2807	2441	2118	1826	1547	1370	1194	1045	911	772	614	455
100%	100%	100%	95%	90%	84%	77%	69%	61%	53%	46%	40%	34%	30%	26%	23%	20%	17%	13%	10%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
37,6°	75,9°	90,6°	97,5%	94,9%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI90-MEDIUM

Color details

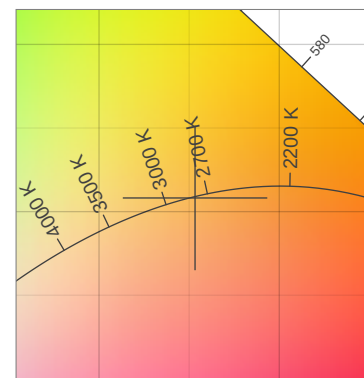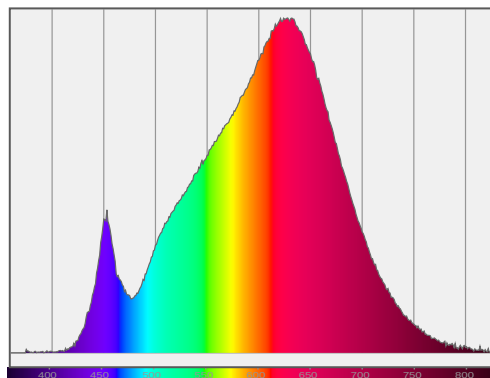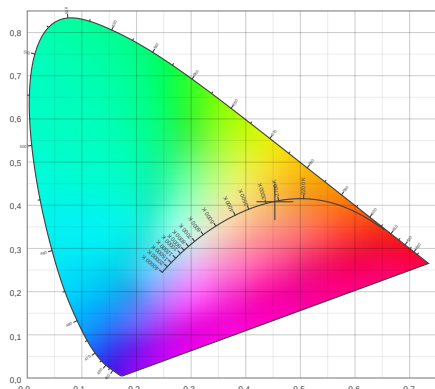

CIE 1931

x: 0,453

2779 K


y: 0,408

Spectra

CIE 1931 ZOOM

 $\Delta uv: -0,0004$


CRI: 93,2 (R1-R8)

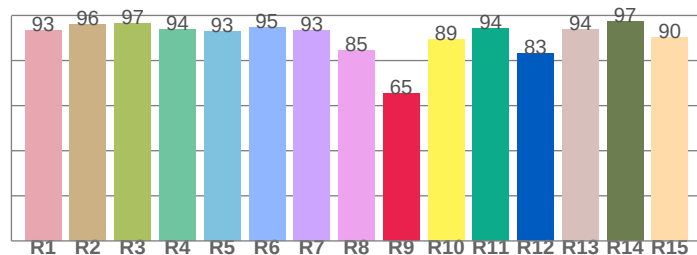

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
93,5	95,9	96,6	93,7	92,9	94,8	93,4	84,7
R9	R10	R11	R12	R13	R14	R15	
65,4	89,3	94,2	83,1	94,0	97,3	90,2	


CQS: 90,8

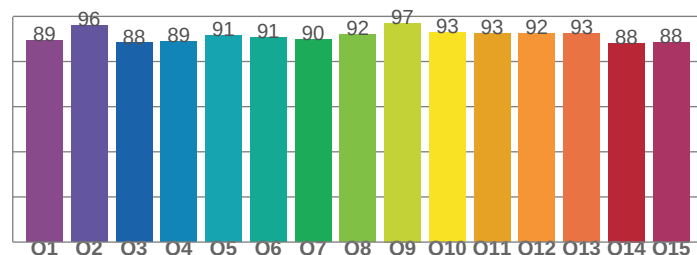

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
89,2	96,0	88,2	88,8	91,4	90,7	89,7	91,9
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
97,1	93,0	92,5	92,4	92,5	88,2	88,3	

TM30: 91,3

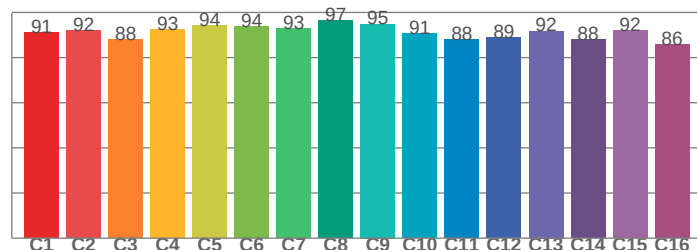

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
91,1	92,0	88,1	92,5	94,2	93,8	92,9	96,5
C9	C10	C11	C12	C13	C14	C15	
94,9	90,8	88,0	88,9	91,9	88,0	91,9	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2779 K	93,2	65,4	91,3	100,5	90,8	0,453	0,408	0,259	0,350	-0,0004

CLS

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI90-MEDIUM

TM30 details


Rf 91,3

Fidelity index Rf


Rg 100,5

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	91	-4%	-1%
2	92	-3%	3%
3	88	-1%	5%
4	93	0%	3%
5	94	2%	3%
6	94	3%	0%
7	93	0%	-3%
8	97	-1%	-2%
9	95	-2%	1%
10	91	-2%	5%
11	88	0%	8%
12	89	5%	2%
13	92	4%	-4%
14	88	5%	-7%
15	92	0%	-4%
16	86	-2%	-10%

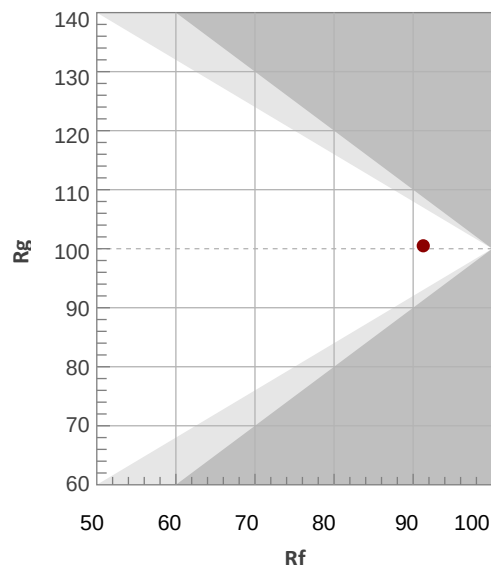


Hue binH

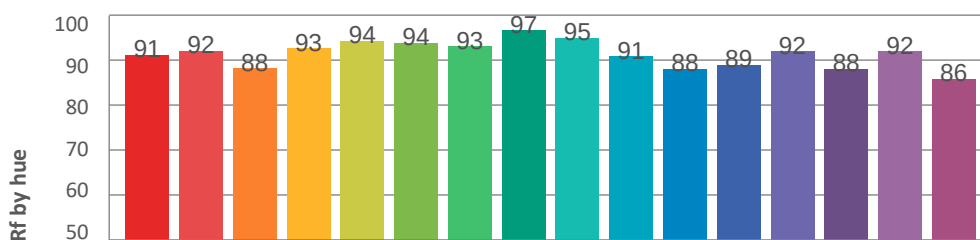

Color vector graphics




Hue bin

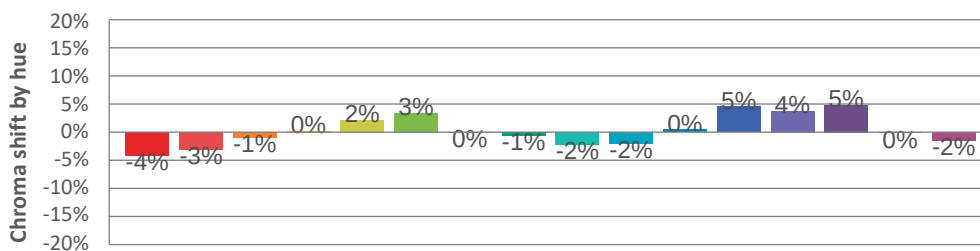

Color distortion graphics



Color Evaluation Sample

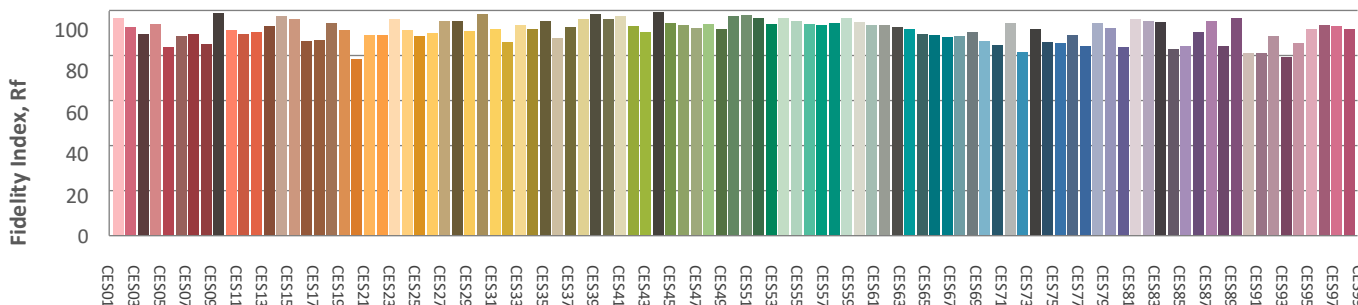

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-2700K-CRI90-MEDIUM

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,6	22,3	21,9	22,5	22,7	21,6	22,3	21,9	22,5	22,7
	3H	21,7	22,3	22,0	22,6	22,8	21,7	22,3	22,0	22,6	22,8
	4H	21,7	22,3	22,0	22,6	22,9	21,7	22,3	22,0	22,6	22,9
	6H	21,8	22,3	22,1	22,6	22,9	21,8	22,3	22,1	22,6	22,9
	8H	21,8	22,3	22,2	22,6	23,0	21,8	22,3	22,2	22,6	23,0
	12H	21,8	22,3	22,2	22,6	23,0	21,8	22,3	22,2	22,6	23,0
4H	2H	21,5	22,1	21,8	22,4	22,6	21,5	22,1	21,8	22,4	22,6
	3H	21,6	22,1	22,0	22,5	22,8	21,6	22,1	22,0	22,5	22,8
	4H	21,8	22,2	22,2	22,6	22,9	21,8	22,2	22,2	22,6	22,9
	6H	21,9	22,3	22,3	22,7	23,1	21,9	22,3	22,3	22,7	23,1
	8H	22,0	22,3	22,4	22,7	23,1	22,0	22,3	22,4	22,7	23,1
	12H	22,0	22,3	22,4	22,7	23,1	22,0	22,3	22,4	22,7	23,1
8H	4H	21,8	22,1	22,2	22,5	22,9	21,8	22,1	22,2	22,5	22,9
	6H	22,0	22,2	22,4	22,7	23,1	22,0	22,2	22,4	22,7	23,1
	8H	22,1	22,3	22,5	22,7	23,2	22,1	22,3	22,5	22,7	23,2
	12H	22,1	22,3	22,6	22,8	23,3	22,1	22,3	22,6	22,8	23,3
12H	4H	21,8	22,0	22,2	22,5	22,9	21,8	22,0	22,2	22,5	22,9
	6H	22,0	22,2	22,5	22,6	23,1	22,0	22,2	22,5	22,6	23,1
	8H	22,1	22,2	22,6	22,7	23,2	22,1	22,2	22,6	22,7	23,2
Variation of the observer position for the luminaire distance S											
S = 1,0H		+3,6 / -3,4					+3,6 / -3,4				
S = 1,5H		+6,1 / -3,7					+6,1 / -3,7				
S = 2,0H		+8,0 / -4,1					+8,0 / -4,1				
Standard table		BK01					BK01				
Correction summand		3,9					3,9				
Corrected glare indices referring to 2524lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf