

LM-79

Test Report


LM79-MIKA-3000K-CRI90-MEDIUM

General Description


Item number	M-XXX-3-1-3090-2
Date and time	27-1-2017 14:00:30
CCT (Kelvin)	3115 K
Beam angle	37,4°
Luminous flux	2585 lm
Efficiency	93 lm/watt
Weighted energy	27,9 kWh/1000h
Power factor	0,94
CRI (RA)	92,2
Fidelity index Rf	Rf 90,3
Gammut index Rg	Rg 101,1
Peak	4733 cd



Polar diagram

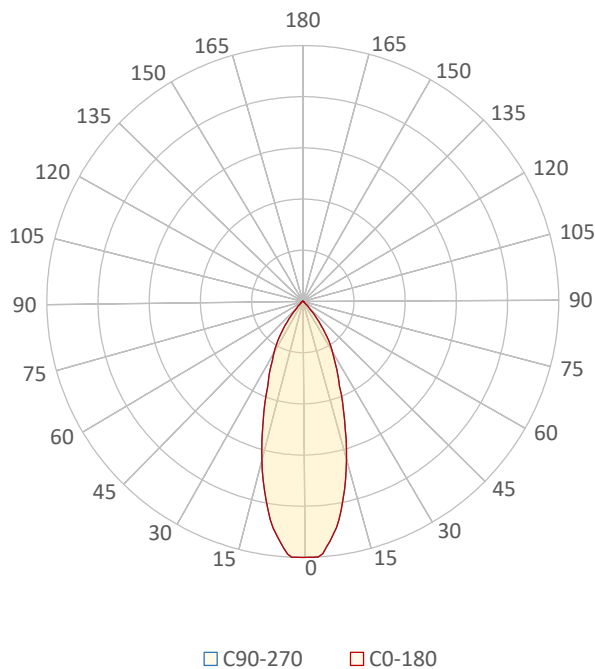

Cartesian diagram

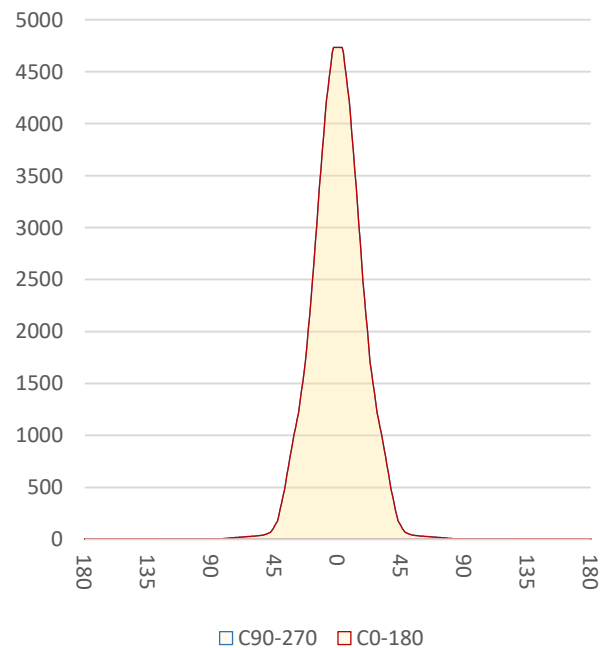

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-3000K-CRI90-MEDIUM

Beam details	1m	2m	3m	4m	5m																			
Lux*	4733 lx	1183 lx	526 lx	296 lx	189 lx																			
*measured at center of beam																								
Footcandles*	439,7 fcd	109,9 fcd	48,9 fcd	27,5 fcd	17,6 fcd																			
Beam width (meter)	0,7 m	1,4 m	2 m	2,7 m	3,4 m																			
Beam width (Feet)	2,2 ft	4,4 ft	6,7 ft	8,9 ft	11,1 ft																			
Beam intensities																								
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m					
4733lx	1183lx	526lx	296lx	189lx	131lx	97lx	74lx	58lx	47lx	39lx	33lx	28lx	24lx	21lx	18lx	16lx	15lx	13lx	12lx					
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft					
439,7fcd	109,9fcd	48,9fcd	27,5fcd	17,6fcd	12,2fcd	9fcd	6,9fcd	5,4fcd	4,4fcd	3,6fcd	3,1fcd	2,6fcd	2,2fcd	2fcd	1,7fcd	1,5fcd	1,4fcd	1,2fcd	1,1fcd					
Intensities in 0° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
4733	4733	4682	4454	4226	3908	3566	3215	2847	2479	2166	1860	1605	1411	1219	1081	943	792	632	476					
100%	100%	99%	94%	89%	83%	75%	68%	60%	52%	46%	39%	34%	30%	26%	23%	20%	17%	13%	10%					
Intensities in 90° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
4733	4733	4682	4454	4226	3908	3566	3215	2847	2479	2166	1860	1605	1411	1219	1081	943	792	632	476					
100%	100%	99%	94%	89%	83%	75%	68%	60%	52%	46%	39%	34%	30%	26%	23%	20%	17%	13%	10%					
Intensities in 180° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
4733	4733	4682	4454	4226	3908	3566	3215	2847	2479	2166	1860	1605	1411	1219	1081	943	792	632	476					
100%	100%	99%	94%	89%	83%	75%	68%	60%	52%	46%	39%	34%	30%	26%	23%	20%	17%	13%	10%					
Intensities in 270° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
4733	4733	4682	4454	4226	3908	3566	3215	2847	2479	2166	1860	1605	1411	1219	1081	943	792	632	476					
100%	100%	99%	94%	89%	83%	75%	68%	60%	52%	46%	39%	34%	30%	26%	23%	20%	17%	13%	10%					
Beam angle 50%					Field angle 10%					Cutoff angle 2,5%					Intensity ratio in 120° cone					Intensity ratio in 90° cone				
37,4°					76,1°					90,9°					97,4%					95,0%				



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-3000K-CRI90-MEDIUM

Color details

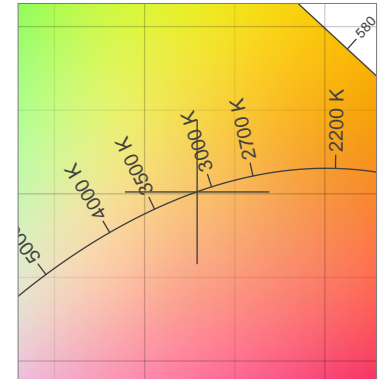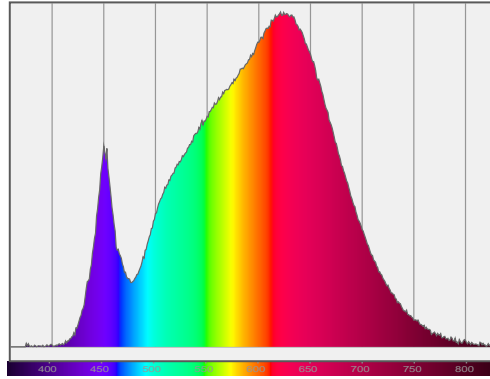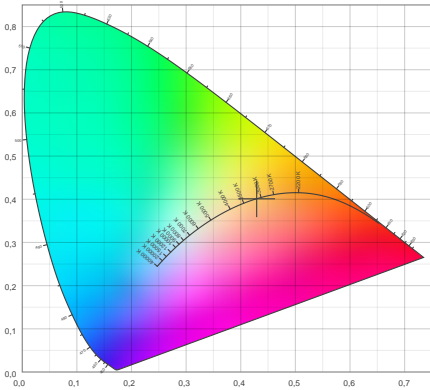

CIE 1931

x: 0,429



Spectra


CIE 1931 ZOOM

3115 K

y: 0,401

Δuv : 0,0001


CRI: 92,2 (R1-R8)

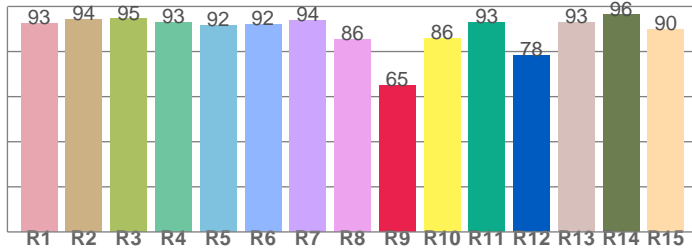

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
92,5	94,3	94,5	93,0	91,7	92,1	93,9	85,5
R9	R10	R11	R12	R13	R14	R15	
64,9	85,7	93,1	78,4	92,8	96,3	89,8	


CQS: 90,4

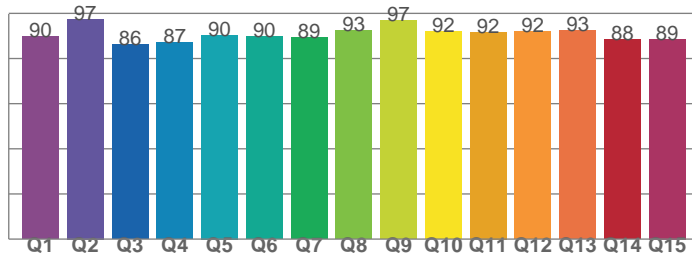

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
89,9	97,5	86,2	87,3	90,4	89,7	89,3	92,5
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
96,8	92,1	91,8	92,1	92,6	88,3	88,6	

TM30: 90,3

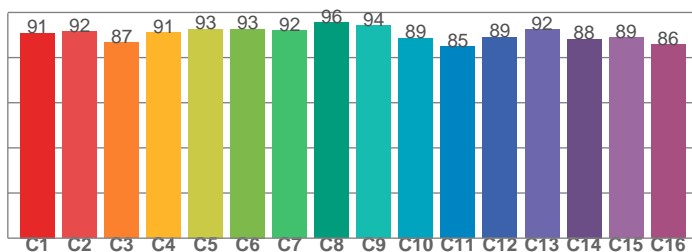

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
90,9	91,6	86,6	91,0	92,7	92,7	92,1	95,6
C9	C10	C11	C12	C13	C14	C15	
94,1	88,7	84,9	89,0	92,5	88,3	88,8	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3115 K	92,2	64,9	90,3	101,1	90,4	0,429	0,401	0,247	0,346	0,0001



CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-3000K-CRI90-MEDIUM

TM30 details


Rf 90,3

Fidelity index Rf


Rg 101,1

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	91	-4%	-1%
2	92	-3%	3%
3	87	-1%	6%
4	91	1%	5%
5	93	2%	3%
6	93	4%	0%
7	92	1%	-4%
8	96	-1%	-2%
9	94	-3%	1%
10	89	-3%	5%
11	85	0%	9%
12	89	5%	4%
13	92	4%	-1%
14	88	6%	-6%
15	89	1%	-6%
16	86	0%	-10%

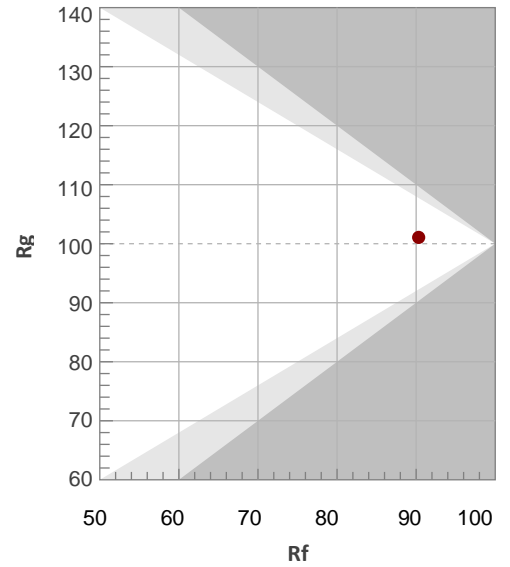


Hue binH

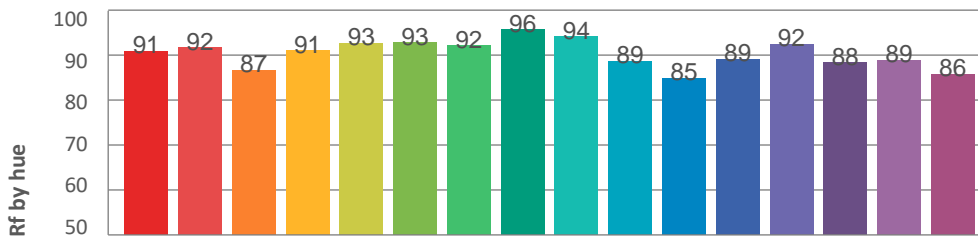

Color vector graphics




Hue bin

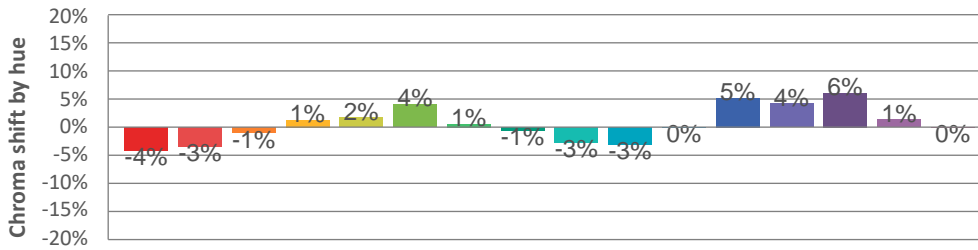

Color distortion graphics



Color Evaluation Sample

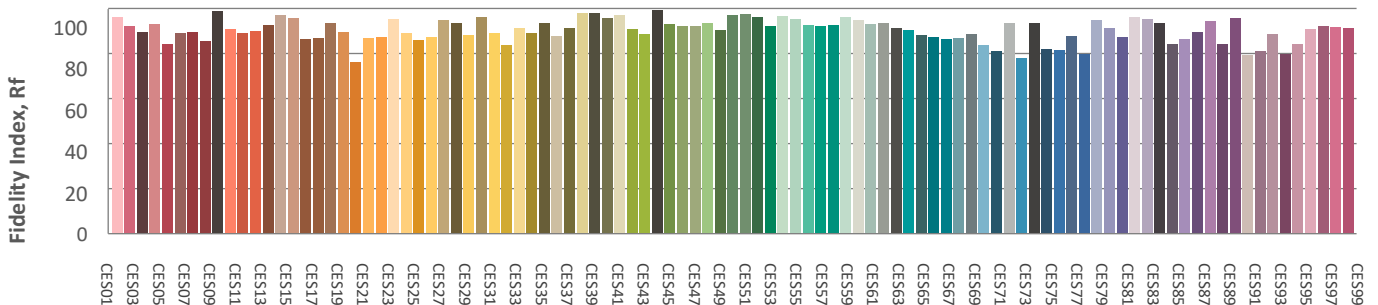

CLS LED BV
info@cls-led.com
www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-MIKA-3000K-CRI90-MEDIUM

Glare Evaluation According to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	21,8	22,5	22,0	22,7	22,9	21,8	22,5	22,0	22,7	22,9
	3H	21,8	22,5	22,1	22,7	23,0	21,8	22,5	22,1	22,7	23,0
	4H	21,9	22,5	22,2	22,8	23,0	21,9	22,5	22,2	22,8	23,0
	6H	21,9	22,5	22,3	22,8	23,1	21,9	22,5	22,3	22,8	23,1
	8H	22,0	22,5	22,3	22,8	23,1	22,0	22,5	22,3	22,8	23,1
	12H	22,0	22,5	22,3	22,8	23,1	22,0	22,5	22,3	22,8	23,1
4H	2H	21,6	22,3	22,0	22,5	22,8	21,6	22,3	22,0	22,5	22,8
	3H	21,8	22,3	22,2	22,6	23,0	21,8	22,3	22,2	22,6	23,0
	4H	21,9	22,4	22,3	22,7	23,1	21,9	22,4	22,3	22,7	23,1
	6H	22,1	22,4	22,5	22,8	23,2	22,1	22,4	22,5	22,8	23,2
	8H	22,1	22,4	22,5	22,8	23,2	22,1	22,4	22,5	22,8	23,2
	12H	22,1	22,4	22,6	22,8	23,3	22,1	22,4	22,6	22,8	23,3
8H	4H	21,9	22,3	22,4	22,7	23,1	21,9	22,3	22,4	22,7	23,1
	6H	22,1	22,4	22,6	22,8	23,3	22,1	22,4	22,6	22,8	23,3
	8H	22,2	22,4	22,7	22,8	23,3	22,2	22,4	22,7	22,8	23,3
	12H	22,2	22,4	22,7	22,9	23,4	22,2	22,4	22,7	22,9	23,4
12H	4H	21,9	22,2	22,4	22,6	23,1	21,9	22,2	22,4	22,6	23,1
	6H	22,1	22,3	22,6	22,8	23,2	22,1	22,3	22,6	22,8	23,2
	8H	22,2	22,4	22,7	22,8	23,3	22,2	22,4	22,7	22,8	23,3
Variation of the observer position for the luminaire distance S											
S = 1,0H	+3,6 / -3,5					+3,6 / -3,5					
S = 1,5H	+6,1 / -3,8					+6,1 / -3,8					
S = 2,0H	+8,0 / -4,2					+8,0 / -4,2					
Standard table	BK01					BK01					
Correction summand	4,0					4,0					
Corrected glare indices referring to 2585lm total luminous flux											



CLS LED BV
 info@cls-led.com
 www.cls-led.com

2017 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf