


LM-79

Test Report


LM79-TOPAZ-COLOURFLOW-RGBA-MEDIUM [AMBER]

General Discription

Item number	T-C-XCX-1C-NA70-M
Date and time	8-12-2025 13:53:53
CCT (Kelvin)	1737 K
Beam angle	24,6°
Luminous flux	482 lm
Efficiency	43 lm/watt
Weighted energy	11,3 kWh/1000h
Power factor	0,47
CRI (RA)	58,8
Fidelity index Rf	Rf 65,7
Gammut index Rg	Rg 64,7
Peak	2044 cd

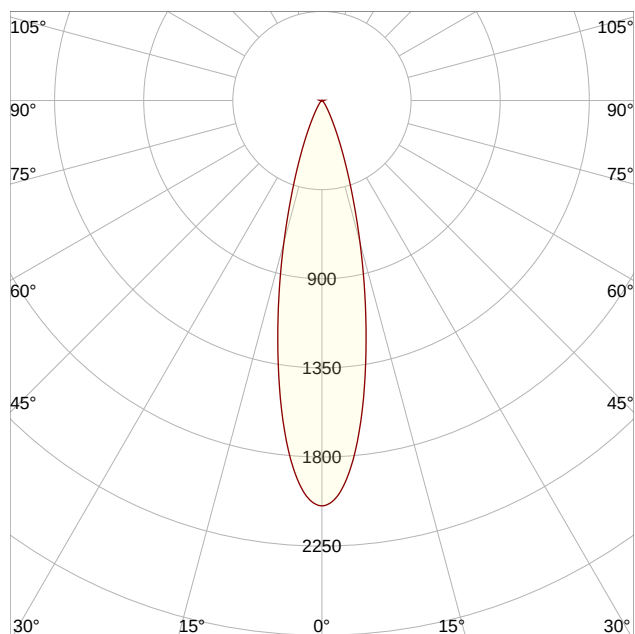

Polar curve

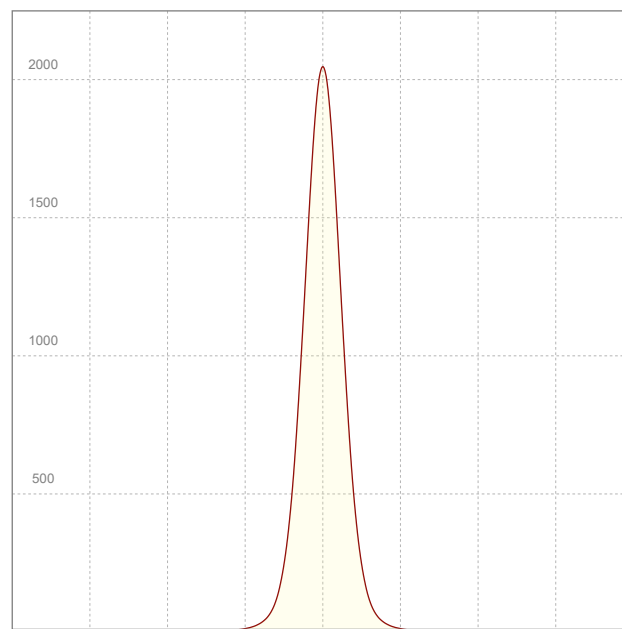

Linear distribution diagram



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-MEDIUM [AMBER]

Beam details	1m	2m	3m	4m	5m
Lux*	2044 lx	511 lx	227 lx	128 lx	82 lx

24,6°

*measured at center of beam

Footcandles*	189,9 fcd	47,5 fcd	21,1 fcd	11,9 fcd	7,6 fcd
Beam width (meter)	0,4 m	0,9 m	1,3 m	1,7 m	2,2 m
Beam width (Feet)	1,4 ft	2,9 ft	4,3 ft	5,7 ft	7,2 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
2044lx	511lx	227lx	128lx	82lx	57lx	42lx	32lx	25lx	20lx	17lx	14lx	12lx	10lx	9lx	8lx	7lx	6lx	6lx	5lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
189,9fcd	47,5fcd	21,1fcd	11,9fcd	7,6fcd	5,3fcd	3,9fcd	3fcd	2,3fcd	1,9fcd	1,6fcd	1,3fcd	1,1fcd	1fcd	0,8fcd	0,7fcd	0,7fcd	0,6fcd	0,5fcd	0,5fcd

Intensities in 0° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2044	2006	1894	1723	1511	1281	1055	843	651	491	364	266	192	137	99	73	55	42	33	26
100%	98%	93%	84%	74%	63%	52%	41%	32%	24%	18%	13%	9%	7%	5%	4%	3%	2%	2%	1%

Intensities in 90° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2044	2006	1894	1723	1511	1281	1055	843	651	491	364	266	192	137	99	73	55	42	33	26
100%	98%	93%	84%	74%	63%	52%	41%	32%	24%	18%	13%	9%	7%	5%	4%	3%	2%	2%	1%

Intensities in 180° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2044	2006	1894	1723	1511	1281	1055	843	651	491	364	266	192	137	99	73	55	42	33	26
100%	98%	93%	84%	74%	63%	52%	41%	32%	24%	18%	13%	9%	7%	5%	4%	3%	2%	2%	1%

Intensities in 270° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2044	2006	1894	1723	1511	1281	1055	843	651	491	364	266	192	137	99	73	55	42	33	26
100%	98%	93%	84%	74%	63%	52%	41%	32%	24%	18%	13%	9%	7%	5%	4%	3%	2%	2%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
24,6°	47,2°	64,9°	99,1%	97,3%



CLS LED BV
info@cls-led.com
www.cls-led.com




2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-MEDIUM [AMBER]

Color details

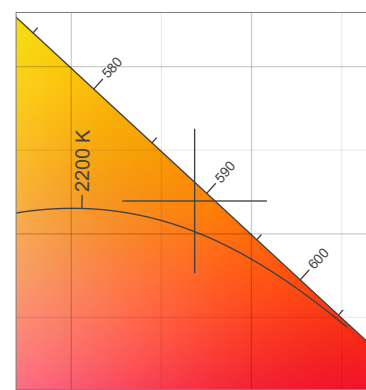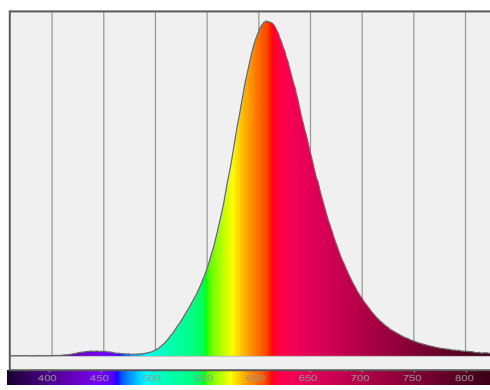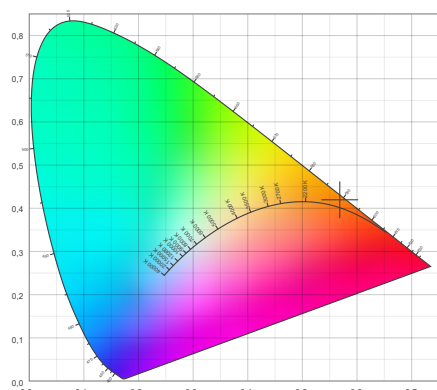

CIE 1931

x: 0,568



Spectra

CIE 1931 ZOOM


1737 K

y: 0,420

Δuv : 0,0046

CRI: 58,8 (R1-R8)


CRI values, R1-R8 are used to calculate final CRI value

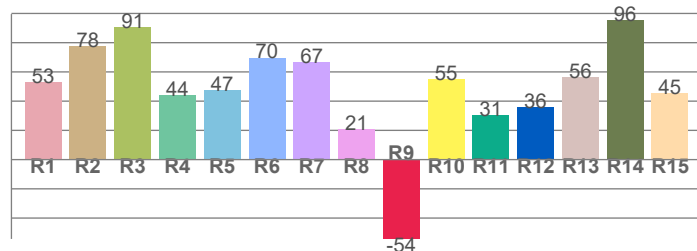

R1	R2	R3	R4	R5	R6	R7	R8
53,2	77,8	90,9	44,2	47,3	69,8	66,9	20,7
R9	R10	R11	R12	R13	R14	R15	
-54,3	54,8	30,5	36,1	56,2	95,7	45,4	

CQS: 20,9


CQS values

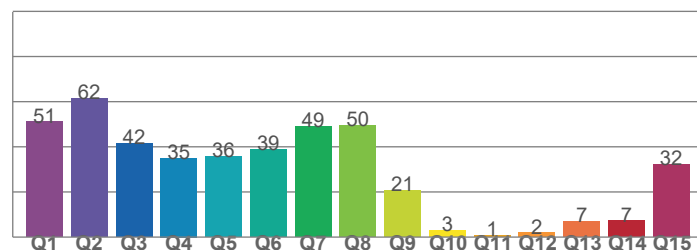

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
51,1	61,6	41,6	35,1	35,8	39,0	49,0	49,6
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
20,7	2,9	0,8	1,9	7,0	7,3	32,3	

TM30: 65,7

TM30 values, 16 binned values out of total of 99 values

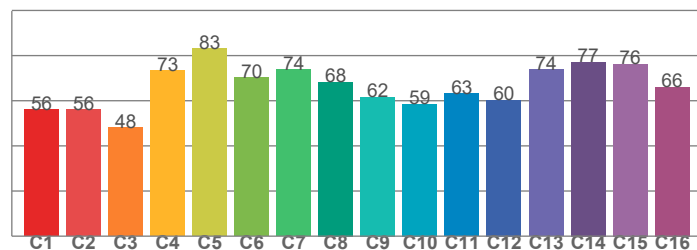

C1	C2	C3	C4	C5	C6	C7	C8
56,0	56,2	48,2	73,4	83,3	70,4	73,9	68,3
C9	C10	C11	C12	C13	C14	C15	
61,7	58,5	63,2	60,3	73,8	77,2	76,3	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
1737 K	58,8	-54,3	65,7	64,7	20,9	0,568	0,420	0,330	0,365	0,0046



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-MEDIUM
[AMBER]

TM30 details


Rf 65,7

Fidelity index Rf


Rg 64,7

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	56	-22%	-6%
2	56	-26%	-2%
3	48	-29%	1%
4	73	-22%	6%
5	83	-17%	7%
6	70	-15%	5%
7	74	-17%	-4%
8	68	-22%	-7%
9	62	-19%	-7%
10	59	-25%	1%
11	63	-20%	11%
12	60	-19%	15%
13	74	-18%	-1%
14	77	-15%	-12%
15	76	-13%	-8%
16	66	-20%	-8%

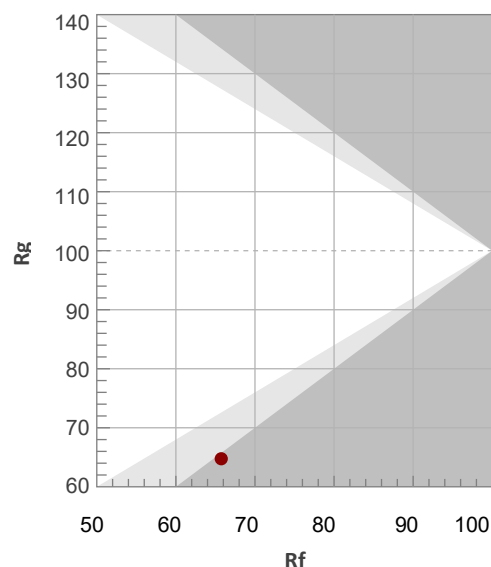


Hue binH

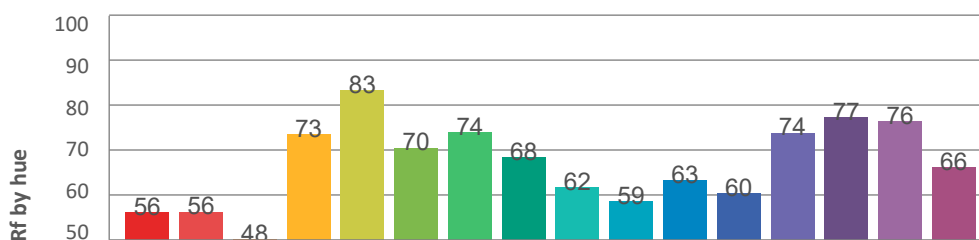


Color vector graphics




Hue bin

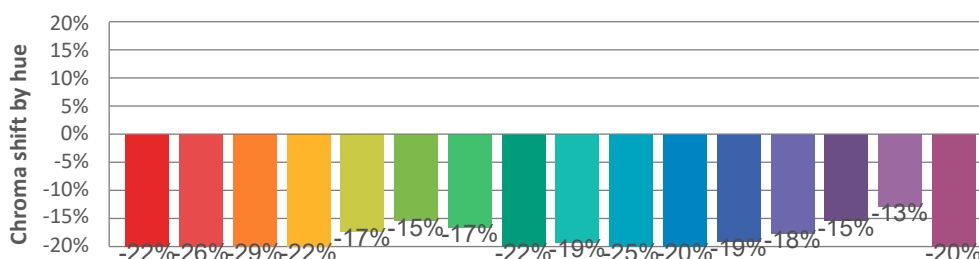

Color distortion graphics



Color Evaluation Sample

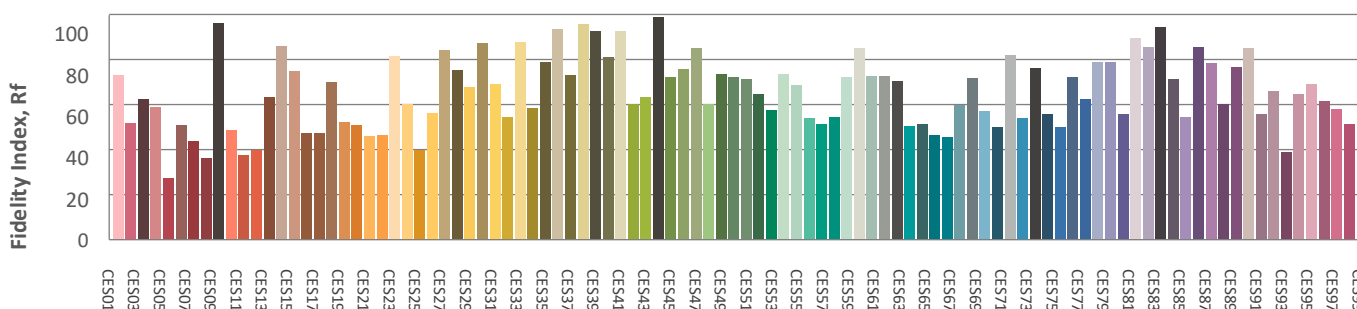

CLS

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-MEDIUM
[AMBER]

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	6,8	7,2	6,9	7,4	7,6	6,8	7,2	6,9	7,4	7,6
	3H	6,6	7,2	7,0	7,4	7,6	6,6	7,2	7,0	7,4	7,6
	4H	6,6	7,2	7,0	7,5	7,7	6,6	7,2	7,0	7,5	7,7
	6H	6,7	7,2	7,0	7,5	7,8	6,7	7,2	7,0	7,5	7,8
	8H	6,7	7,1	7,0	7,5	7,8	6,7	7,1	7,0	7,5	7,8
	12H	6,6	7,1	7,0	7,4	7,8	6,6	7,1	7,0	7,4	7,8
4H	2H	6,5	7,1	6,9	7,3	7,5	6,5	7,1	6,9	7,3	7,5
	3H	6,6	7,1	7,0	7,4	7,9	6,6	7,1	7,0	7,4	7,9
	4H	6,6	7,0	7,0	7,5	8,0	6,6	7,0	7,0	7,5	8,0
	6H	6,6	7,1	7,1	7,4	7,8	6,6	7,1	7,1	7,4	7,8
	8H	6,6	7,1	7,1	7,4	7,7	6,6	7,1	7,1	7,4	7,7
	12H	6,6	6,9	7,1	7,3	7,8	6,6	6,9	7,1	7,3	7,8
8H	4H	6,5	7,0	7,1	7,3	7,7	6,5	7,0	7,1	7,3	7,7
	6H	6,6	6,9	7,1	7,3	7,9	6,6	6,9	7,1	7,3	7,9
	8H	6,7	6,9	7,2	7,4	8,0	6,7	6,9	7,2	7,4	8,0
	12H	6,6	6,8	7,2	7,3	7,9	6,6	6,8	7,2	7,3	7,9
12H	4H	6,5	6,8	7,0	7,2	7,7	6,5	6,8	7,0	7,2	7,7
	6H	6,6	6,8	7,1	7,4	8,0	6,6	6,8	7,1	7,4	8,0
	8H	6,6	6,8	7,2	7,3	7,9	6,6	6,8	7,2	7,3	7,9
Variation of the observer position for the luminaire distance S											
S = 1.0H		3,9 / -3,5					3,9 / -3,5				
S = 1.5H		6,3 / -4,7					6,3 / -4,7				
S = 2.0H		8,1 / -5,4					8,1 / -5,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 482lm total luminous flux											



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf