



General Discription

Item number	T-C-XCX-1C-NA70-W
Date and time	8-12-2025 14:19:21
CCT (Kelvin)	1739 K
Beam angle	32,2°
Luminous flux	493 lm
Efficiency	45 lm/watt
Weighted energy	11,0 kWh/1000h
Power factor	0,48
CRI (RA)	58,9
Fidelity index Rf	Rf 66,0
Gammut index Rg	Rg 65,3
Peak	1409 cd

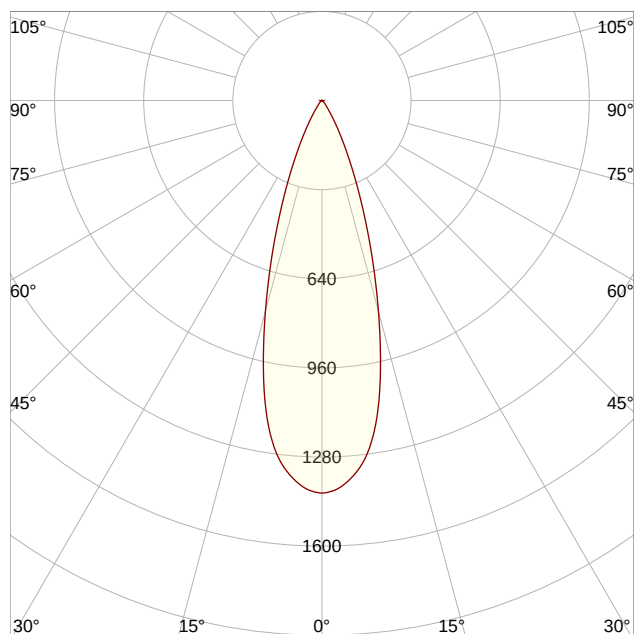

Polar curve

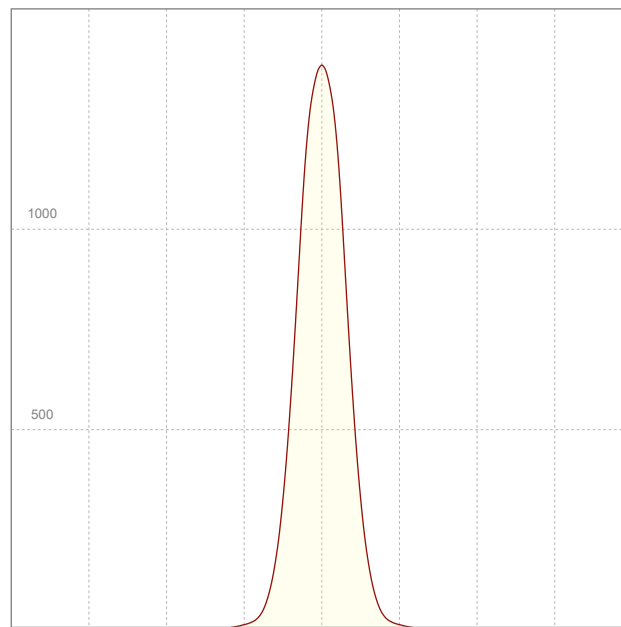

Linear distribution diagram

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-WIDE [AMBER]

Beam details	1m	2m	3m	4m	5m
Lux*	1409 lx	352 lx	157 lx	88 lx	56 lx

32,2°

*measured at center of beam

Footcandles*	130,9 fcd	32,7 fcd	14,5 fcd	8,2 fcd	5,2 fcd
Beam width (meter)	0,6 m	1,2 m	1,7 m	2,3 m	2,9 m
Beam width (Feet)	1,9 ft	3,8 ft	5,7 ft	7,6 ft	9,5 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
1409lx	352lx	157lx	88lx	56lx	39lx	29lx	22lx	17lx	14lx	12lx	10lx	8lx	7lx	6lx	6lx	5lx	4lx	4lx	4lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
130,9fcd	32,7fcd	14,5fcd	8,2fcd	5,2fcd	3,6fcd	2,7fcd	2fcd	1,6fcd	1,3fcd	1,1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd

Intensities in 0° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1409	1398	1368	1321	1249	1144	1008	859	712	576	454	350	264	196	143	102	72	50	36	27
100%	99%	97%	94%	89%	81%	72%	61%	51%	41%	32%	25%	19%	14%	10%	7%	5%	4%	3%	2%

Intensities in 90° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1409	1398	1368	1321	1249	1144	1008	859	712	576	454	350	264	196	143	102	72	50	36	27
100%	99%	97%	94%	89%	81%	72%	61%	51%	41%	32%	25%	19%	14%	10%	7%	5%	4%	3%	2%

Intensities in 180° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1409	1398	1368	1321	1249	1144	1008	859	712	576	454	350	264	196	143	102	72	50	36	27
100%	99%	97%	94%	89%	81%	72%	61%	51%	41%	32%	25%	19%	14%	10%	7%	5%	4%	3%	2%

Intensities in 270° c-plane																			
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1409	1398	1368	1321	1249	1144	1008	859	712	576	454	350	264	196	143	102	72	50	36	27
100%	99%	97%	94%	89%	81%	72%	61%	51%	41%	32%	25%	19%	14%	10%	7%	5%	4%	3%	2%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
32,2°	56,1°	72,2°	99,1%	97,3%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-WIDE [AMBER]

Color details

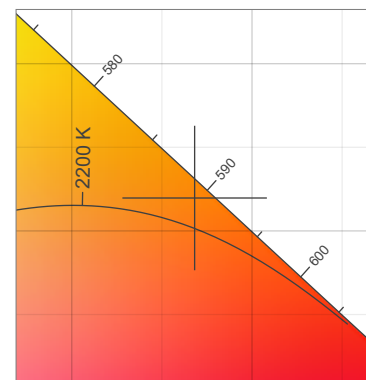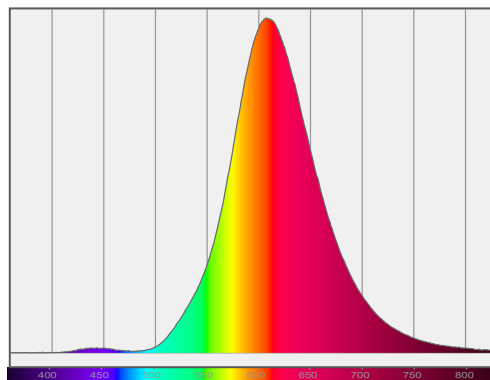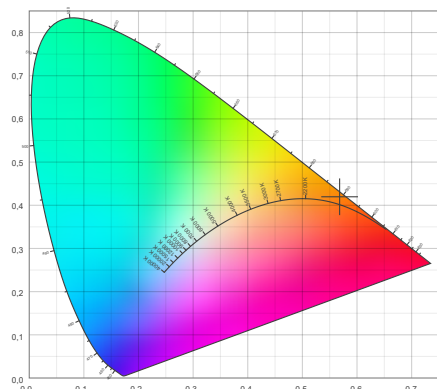

CIE 1931

x: 0,568



Spectra


CIE 1931 ZOOM

1739 K

y: 0,420

Δuv : 0,0046


CRI: 58,9 (R1-R8)

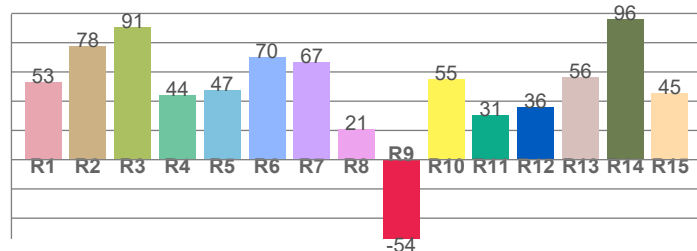

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
53,2	77,8	90,9	44,3	47,4	69,8	66,9	20,8
R9	R10	R11	R12	R13	R14	R15	
-54,2	54,8	30,6	36,2	56,3	95,8	45,4	


CQS: 21,7

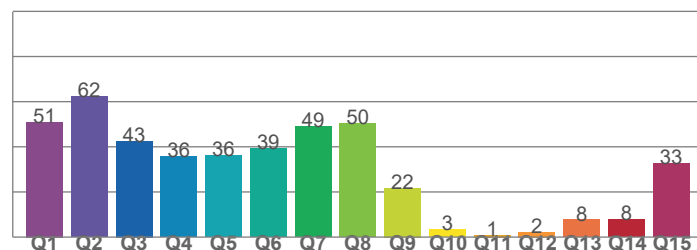

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
51,0	62,3	42,6	35,8	36,3	39,2	49,0	50,3
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
21,7	3,4	0,9	2,2	7,7	7,7	32,5	

TM30: 66,0

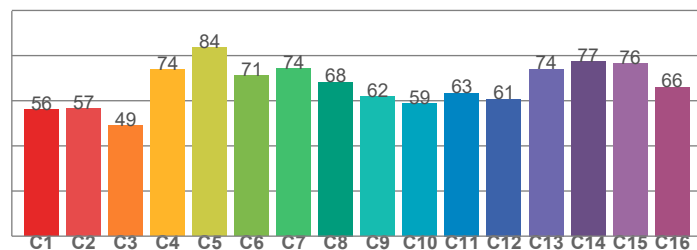

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
56,1	56,5	48,9	74,0	83,6	71,0	74,2	68,4
C9	C10	C11	C12	C13	C14	C15	
61,8	58,7	63,4	60,8	74,1	77,4	76,4	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
1739 K	58,9	-54,2	66,0	65,3	21,7	0,568	0,420	0,329	0,365	0,0046



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-COLOURFLOW-RGBA-WIDE [AMBER]

TM30 details


Rf 66,0

Fidelity index Rf


Rg 65,3

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	56	-22%	-6%
2	57	-26%	-1%
3	49	-28%	1%
4	74	-21%	7%
5	84	-17%	7%
6	71	-15%	5%
7	74	-16%	-4%
8	68	-22%	-8%
9	62	-19%	-7%
10	59	-25%	2%
11	63	-20%	12%
12	61	-19%	15%
13	74	-17%	-1%
14	77	-15%	-12%
15	76	-13%	-9%
16	66	-20%	-8%

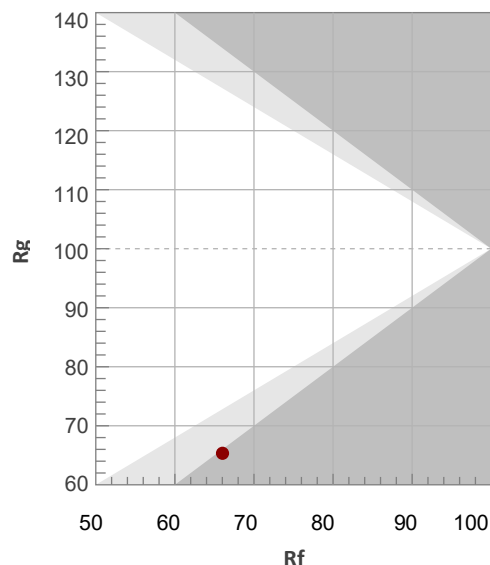


Hue binH

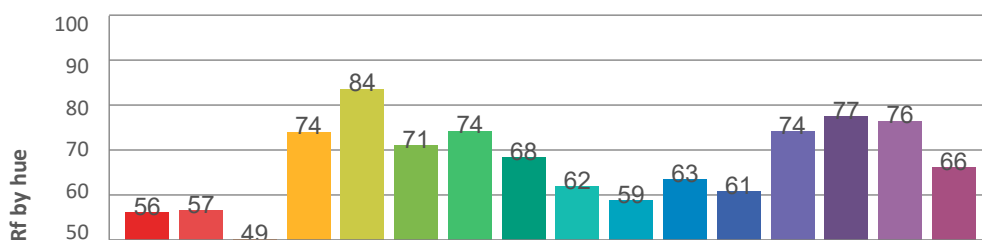


Color vector graphics




Hue bin

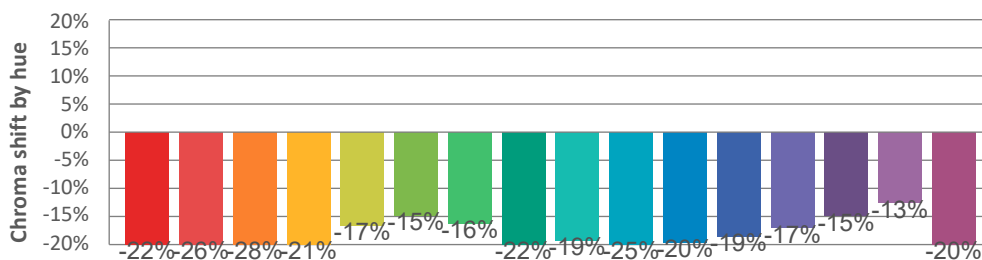

Color distortion graphics



Color Evaluation Sample

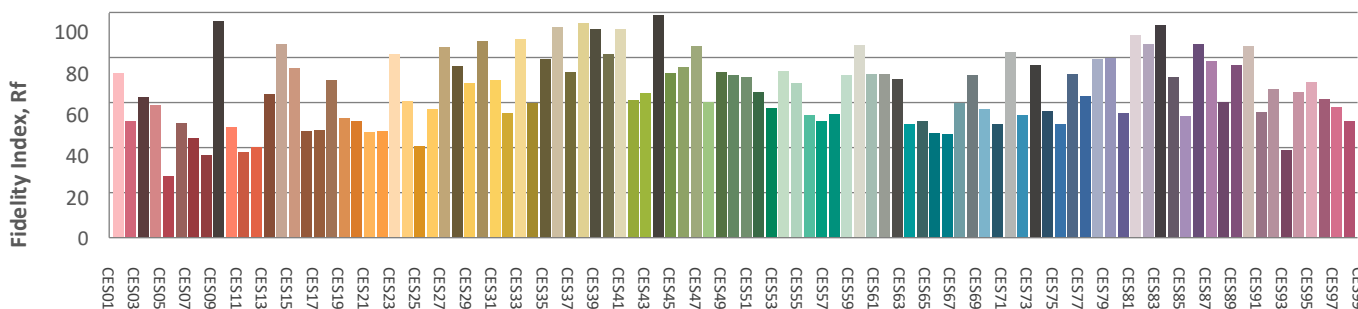

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	7,7	8,2	7,8	8,4	8,5	7,7	8,2	7,8	8,4	8,5
	3H	7,5	8,1	7,9	8,3	8,5	7,5	8,1	7,9	8,3	8,5
	4H	7,5	8,1	7,9	8,3	8,5	7,5	8,1	7,9	8,3	8,5
	6H	7,5	8,0	7,8	8,3	8,7	7,5	8,0	7,8	8,3	8,7
	8H	7,5	8,0	7,8	8,3	8,7	7,5	8,0	7,8	8,3	8,7
	12H	7,4	7,9	7,8	8,3	8,7	7,4	7,9	7,8	8,3	8,7
4H	2H	7,4	8,0	7,8	8,2	8,5	7,4	8,0	7,8	8,2	8,5
	3H	7,4	7,9	7,8	8,3	8,7	7,4	7,9	7,8	8,3	8,7
	4H	7,4	7,8	7,8	8,3	8,8	7,4	7,8	7,8	8,3	8,8
	6H	7,4	7,9	7,9	8,2	8,5	7,4	7,9	7,9	8,2	8,5
	8H	7,4	7,8	7,9	8,1	8,5	7,4	7,8	7,9	8,1	8,5
	12H	7,3	7,7	7,8	8,1	8,5	7,3	7,7	7,8	8,1	8,5
8H	4H	7,3	7,7	7,8	8,1	8,4	7,3	7,7	7,8	8,1	8,4
	6H	7,3	7,6	7,8	8,1	8,6	7,3	7,6	7,8	8,1	8,6
	8H	7,4	7,6	7,9	8,1	8,7	7,4	7,6	7,9	8,1	8,7
	12H	7,3	7,5	7,9	8,0	8,6	7,3	7,5	7,9	8,0	8,6
12H	4H	7,2	7,6	7,7	8,0	8,4	7,2	7,6	7,7	8,0	8,4
	6H	7,4	7,6	7,9	8,1	8,7	7,4	7,6	7,9	8,1	8,7
	8H	7,3	7,5	7,9	8,0	8,6	7,3	7,5	7,9	8,0	8,6
Variation of the observer position for the luminaire distance S											
S = 1.0H		4,6 / -4,2					4,6 / -4,2				
S = 1.5H		7,1 / -5,5					7,1 / -5,5				
S = 2.0H		9,0 / -6,1					9,0 / -6,1				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 493lm total luminous flux											