

LM-79

Test Report


LM79-TOPAZ-EXPO-3500K-CRI90-NARROW

General Discription


Item number	T-E-XLX-1B-3590-N
Date and time	16-2-2024 11:41:45
CCT (Kelvin)	3443 K
Beam angle	12,7°
Luminous flux	923 lm
Efficiency	87 lm/watt
Weighted energy	10,7 kWh/1000h
Power factor	0,99
CRI (RA)	94,6
Fidelity index Rf	Rf 91,8
Gammut index Rg	Rg 101,5
Peak	14730 cd



Polar diagram

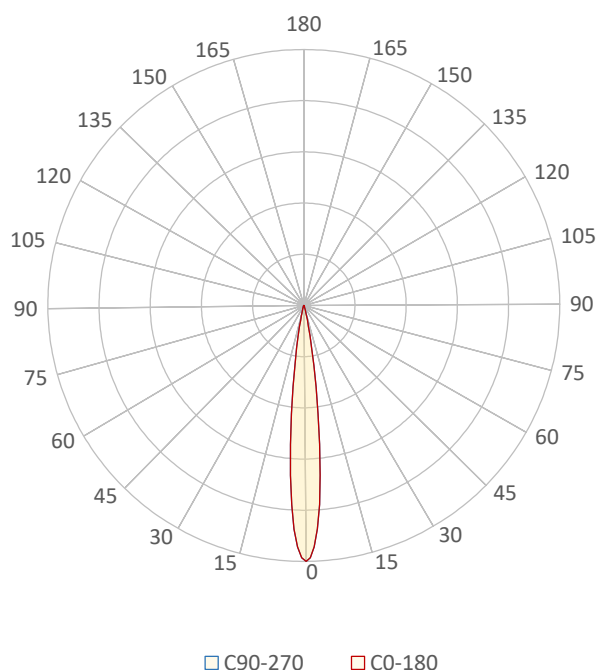

Cartesian diagram

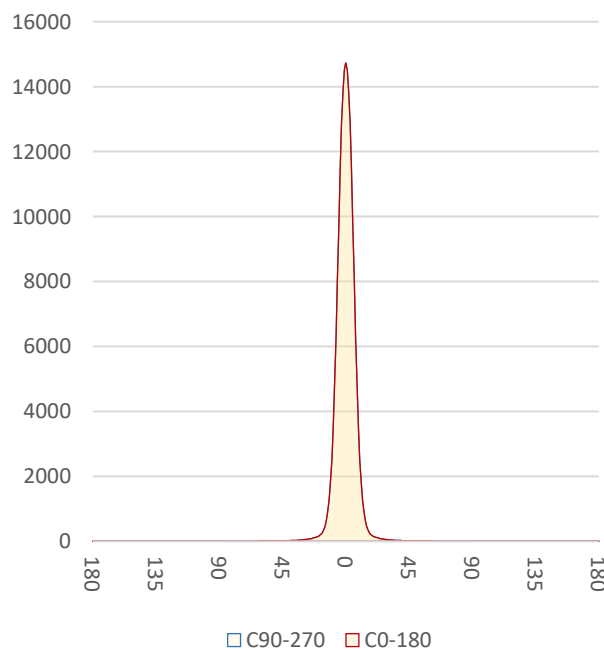

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-EXPO-3500K-CRI90-NARROW

Beam details	1m	2m	3m	4m	5m
Lux*	14730 lx	3683 lx	1637 lx	921 lx	589 lx

*measured at center of beam

Footcandles*	1368,5 fcd	342,1 fcd	152,1 fcd	85,5 fcd	54,7 fcd
Beam width (meter)	0,2 m	0,4 m	0,7 m	0,9 m	1,1 m
Beam width (Feet)	0,7 ft	1,5 ft	2,2 ft	2,9 ft	3,7 ft

Beam intensities																			
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
14730lx	3683lx	1637lx	921lx	589lx	409lx	301lx	230lx	182lx	147lx	122lx	102lx	87lx	75lx	65lx	58lx	51lx	45lx	41lx	37lx
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1368,5fcd	342,1fcd	152,1fcd	85,5fcd	54,7fcd	38fcd	27,9fcd	21,4fcd	16,9fcd	13,7fcd	11,3fcd	9,5fcd	8,1fcd	7fcd	6,1fcd	5,3fcd	4,7fcd	4,2fcd	3,8fcd	3,4fcd

Intensities in 0° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
14,7K	14,5K	13,9K	12,9K	11,5K	9,8K	8,0K	6,3K	4,7K	3,5K	2,5K	1,8K	1,2K	0,9K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	94%	87%	78%	67%	54%	43%	32%	24%	17%	12%	8%	6%	4%	3%	2%	2%	1%	1%

Intensities in 90° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
14,7K	14,5K	13,9K	12,9K	11,5K	9,8K	8,0K	6,3K	4,7K	3,5K	2,5K	1,8K	1,2K	0,9K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	94%	87%	78%	67%	54%	43%	32%	24%	17%	12%	8%	6%	4%	3%	2%	2%	1%	1%

Intensities in 180° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
14,7K	14,5K	13,9K	12,9K	11,5K	9,8K	8,0K	6,3K	4,7K	3,5K	2,5K	1,8K	1,2K	0,9K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	94%	87%	78%	67%	54%	43%	32%	24%	17%	12%	8%	6%	4%	3%	2%	2%	1%	1%

Intensities in 270° c-plane																			
0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°
14,7K	14,5K	13,9K	12,9K	11,5K	9,8K	8,0K	6,3K	4,7K	3,5K	2,5K	1,8K	1,2K	0,9K	0,6K	0,4K	0,3K	0,2K	0,2K	0,2K
100%	99%	94%	87%	78%	67%	54%	43%	32%	24%	17%	12%	8%	6%	4%	3%	2%	2%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
12,7°	23°	31,2°	99,4%	98,4%



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-EXPO-3500K-CRI90-NARROW

Color details

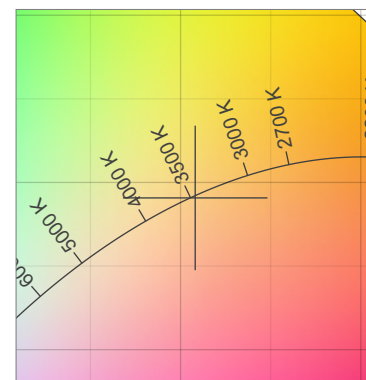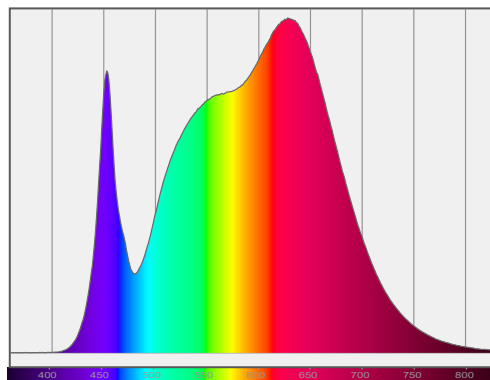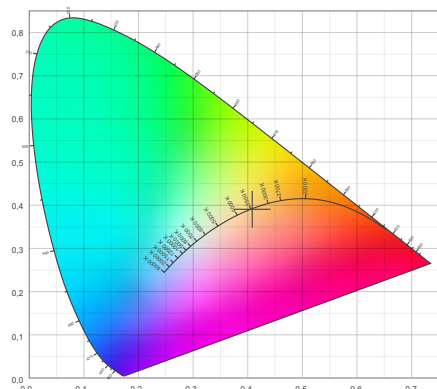

CIE 1931

x: 0,408

3443 K

y: 0,391




Spectra

CIE 1931 ZOOM

Δuv : -0,0006


CRI: 94,6 (R1-R8)

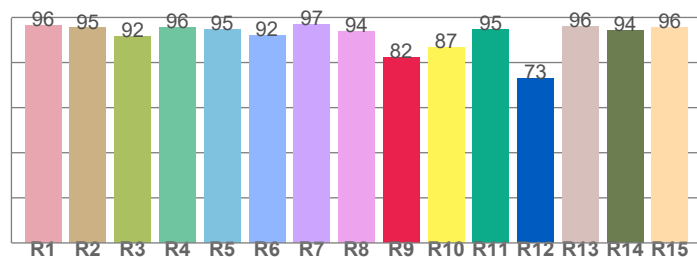

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
96,4	95,4	91,7	95,6	94,6	92,2	96,7	93,8
R9	R10	R11	R12	R13	R14	R15	
82,4	86,8	94,6	72,9	96,1	94,4	95,6	


CQS: 92,5

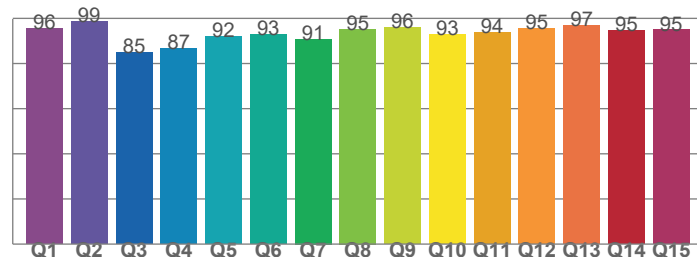

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
95,6	98,8	85,0	86,6	92,1	92,7	90,8	95,3
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
95,9	93,0	93,7	95,5	96,9	94,7	94,9	

TM30: 91,8

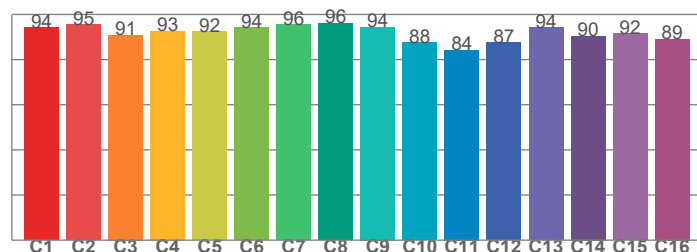

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
94,2	95,4	90,9	92,6	92,4	94,2	95,6	96,1
C9	C10	C11	C12	C13	C14	C15	
94,5	87,5	84,2	87,5	94,3	90,5	91,5	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3443 K	94,6	82,4	91,8	101,5	92,5	0,408	0,391	0,238	0,341	-0,0006



CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-EXPO-3500K-CRI90-NARROW

TM30 details


Rf 91,8

Fidelity index Rf


Rg 101,5

Gamut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	-2%	-1%
2	95	-2%	1%
3	91	-1%	4%
4	93	0%	3%
5	92	0%	3%
6	94	4%	0%
7	96	0%	-1%
8	96	-1%	-1%
9	94	-2%	2%
10	88	-3%	8%
11	84	2%	11%
12	87	5%	6%
13	94	4%	0%
14	90	7%	-3%
15	92	3%	-5%
16	89	2%	-7%

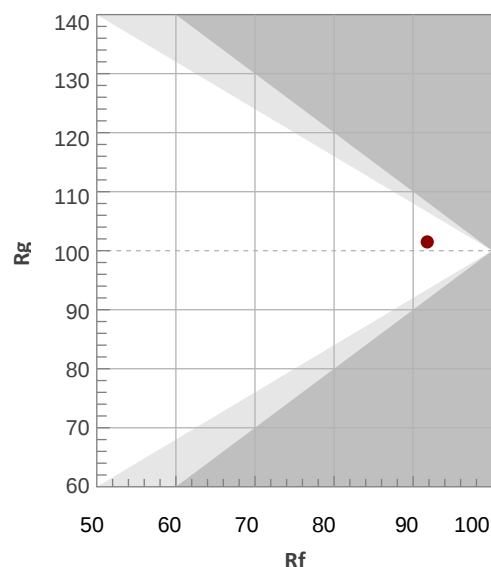


Hue binH

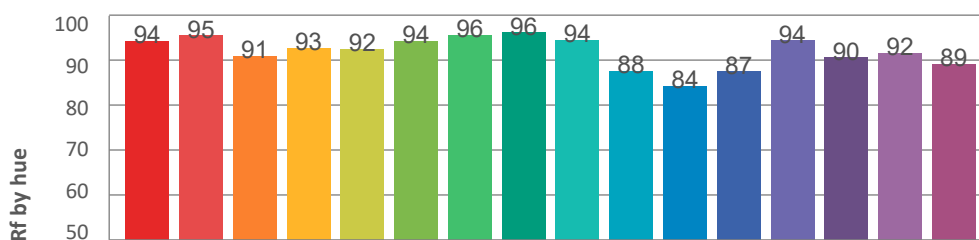


Color vector graphics




Hue bin

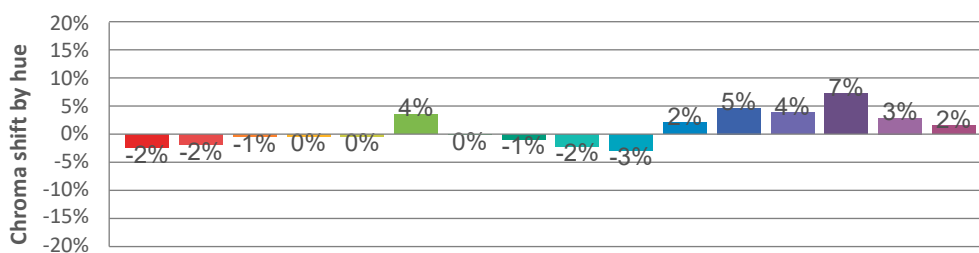

Color distortion graphics



Color Evaluation Sample

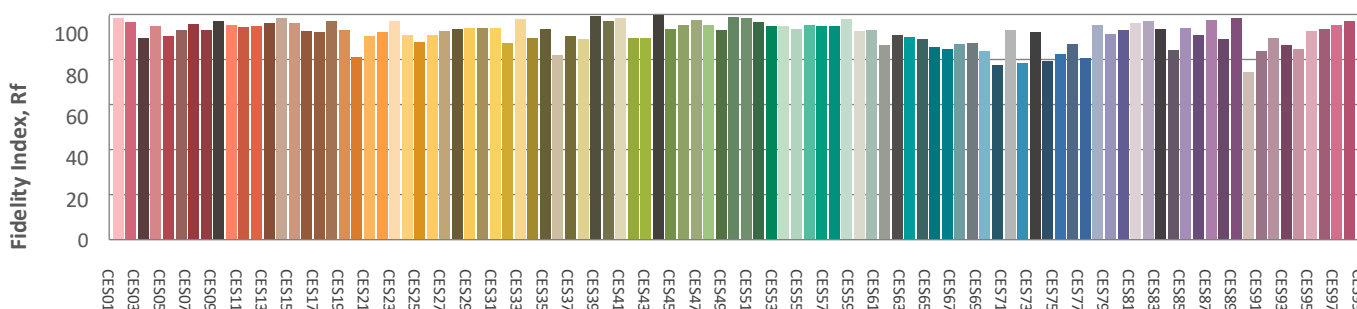

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	4,2	4,5	4,2	4,7	4,8	4,2	4,5	4,2	4,7	4,8
	3H	4,1	4,6	4,4	4,7	4,9	4,1	4,6	4,4	4,7	4,9
	4H	4,1	4,6	4,5	4,8	5,0	4,1	4,6	4,5	4,8	5,0
	6H	4,3	4,6	4,6	5,0	5,3	4,3	4,6	4,6	5,0	5,3
	8H	4,3	4,7	4,6	5,0	5,4	4,3	4,7	4,6	5,0	5,4
	12H	4,3	4,7	4,7	5,0	5,4	4,3	4,7	4,7	5,0	5,4
4H	2H	3,9	4,4	4,3	4,6	4,8	3,9	4,4	4,3	4,6	4,8
	3H	4,1	4,5	4,5	4,8	5,2	4,1	4,5	4,5	4,8	5,2
	4H	4,2	4,5	4,6	4,9	5,4	4,2	4,5	4,6	4,9	5,4
	6H	4,3	4,7	4,8	5,1	5,4	4,3	4,7	4,8	5,1	5,4
	8H	4,4	4,8	4,9	5,1	5,5	4,4	4,8	4,9	5,1	5,5
	12H	4,5	4,7	5,0	5,1	5,6	4,5	4,7	5,0	5,1	5,6
8H	4H	4,1	4,5	4,7	4,9	5,2	4,1	4,5	4,7	4,9	5,2
	6H	4,4	4,6	4,9	5,1	5,6	4,4	4,6	4,9	5,1	5,6
	8H	4,6	4,8	5,1	5,3	5,9	4,6	4,8	5,1	5,3	5,9
	12H	4,7	4,9	5,3	5,4	6,0	4,7	4,9	5,3	5,4	6,0
12H	4H	4,1	4,4	4,6	4,8	5,2	4,1	4,4	4,6	4,8	5,2
	6H	4,5	4,6	5,0	5,1	5,8	4,5	4,6	5,0	5,1	5,8
	8H	4,6	4,7	5,2	5,3	5,8	4,6	4,7	5,2	5,3	5,8
Variation of the observer position for the luminaire distance S											
S = 1.0H		2,3 / -2,1					2,3 / -2,1				
S = 1.5H		4,3 / -2,9					4,3 / -2,9				
S = 2.0H		6,1 / -3,4					6,1 / -3,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 923lm total luminous flux											