

LM-79

Test Report


LM79-TOPAZ-ZOOM-4000K-CRI90 [WIDE]

General Description


Item number	T-Z-XLX-1B-4090-Z
Date and time	16-2-2024 12:00:41
CCT (Kelvin)	3979 K
Beam angle	56,9°
Luminous flux	648 lm
Efficiency	60 lm/watt
Weighted energy	10,8 kWh/1000h
Power factor	0,99
CRI (RA)	94,5
Fidelity index Rf	Rf 92,0
Gammut index Rg	Rg 100,6
Peak	875 cd



Polar diagram

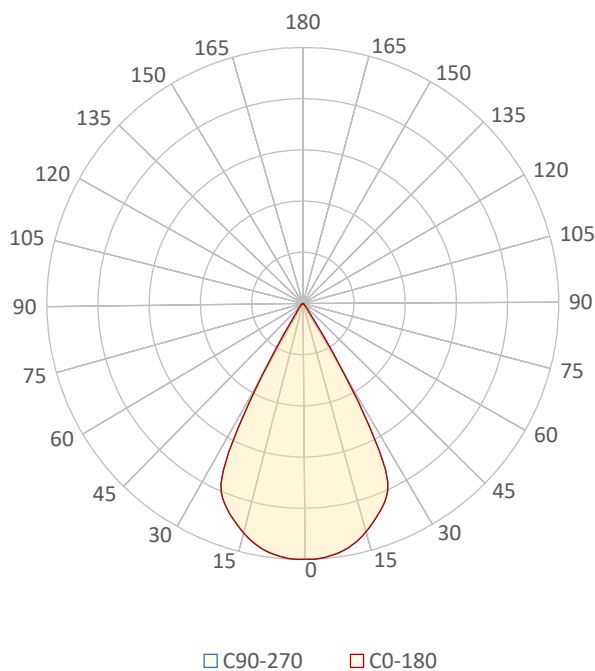

Cartesian diagram

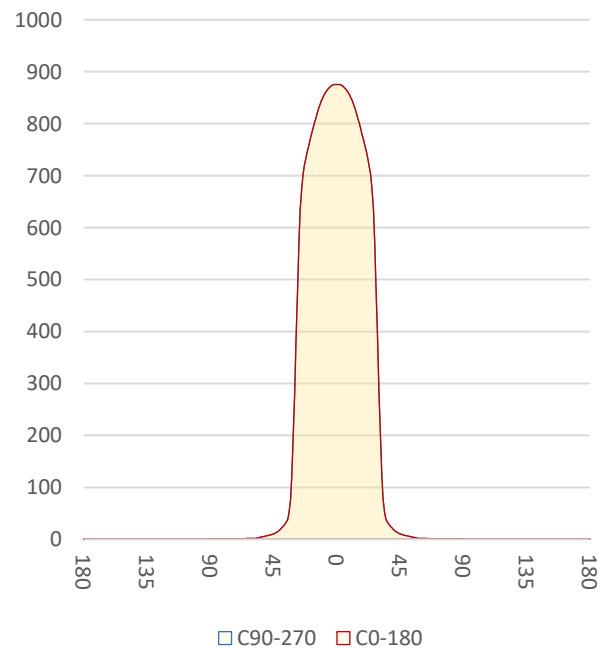

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-ZOOM-4000K-CRI90 [WIDE]

Beam details	1m	2m	3m	4m	5m																			
Lux*	875 lx	219 lx	97 lx	55 lx	35 lx																			
<i>*measured at center of beam</i>																								
Footcandles*	81,3 fcd	20,3 fcd	9,0 fcd	5,1 fcd	3,3 fcd																			
Beam width (meter)	1,1 m	2,2 m	3,3 m	4,3 m	5,4 m																			
Beam width (Feet)	3,6 ft	7,1 ft	10,7 ft	14,2 ft	17,8 ft																			
Beam intensities																								
1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m					
875lx	219lx	97lx	55lx	35lx	24lx	18lx	14lx	11lx	9lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx	2lx					
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft					
81,3fcd	20,3fcd	9fcd	5,1fcd	3,3fcd	2,3fcd	1,7fcd	1,3fcd	1fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd					
Intensities in 0° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
875	875	873	867	860	850	836	819	800	779	758	734	702	634	482	284	124	50	33	26					
100%	100%	100%	99%	98%	97%	96%	94%	91%	89%	87%	84%	80%	72%	55%	32%	14%	6%	4%	3%					
Intensities in 90° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
875	875	873	867	860	850	836	819	800	779	758	734	702	634	482	284	124	50	33	26					
100%	100%	100%	99%	98%	97%	96%	94%	91%	89%	87%	84%	80%	72%	55%	32%	14%	6%	4%	3%					
Intensities in 180° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
875	875	873	867	860	850	836	819	800	779	758	734	702	634	482	284	124	50	33	26					
100%	100%	100%	99%	98%	97%	96%	94%	91%	89%	87%	84%	80%	72%	55%	32%	14%	6%	4%	3%					
Intensities in 270° c-plane																								
0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°					
875	875	873	867	860	850	836	819	800	779	758	734	702	634	482	284	124	50	33	26					
100%	100%	100%	99%	98%	97%	96%	94%	91%	89%	87%	84%	80%	72%	55%	32%	14%	6%	4%	3%					
Beam angle 50%					Field angle 10%					Cutoff angle 2,5%					Intensity ratio in 120° cone					Intensity ratio in 90° cone				
56,9°					65,4°					78,5°					99,6%					98,6%				



CLS LED BV
 info@cls-led.com
 www.cls-led.com




2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-ZOOM-4000K-CRI90 [WIDE]

Color details

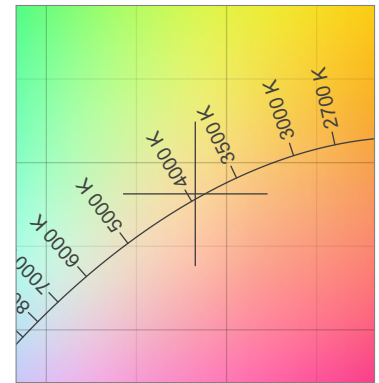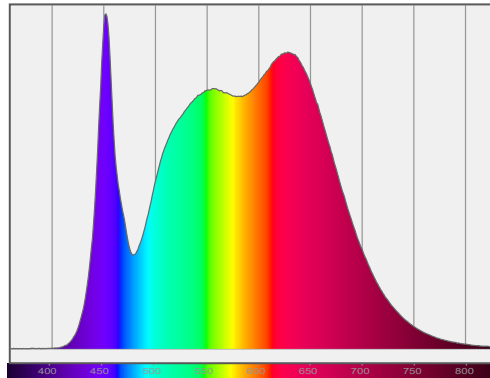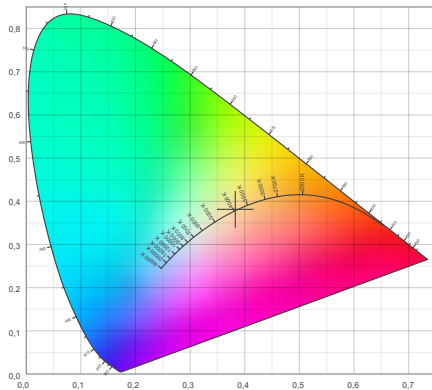

CIE 1931

x: 0,383



Spectra


CIE 1931 ZOOM

3979 K

y: 0,381

Δuv : 0,0015


CRI: 94,5 (R1-R8)

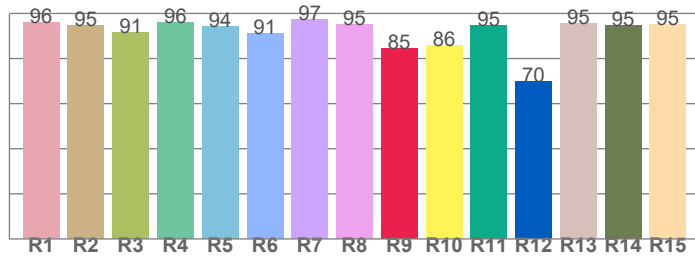

CRI values, R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8
95,9	94,8	91,4	95,9	94,1	91,2	97,5	95,3
R9	R10	R11	R12	R13	R14	R15	
84,6	85,9	94,7	69,7	95,5	94,6	95,2	


CQS: 93,3

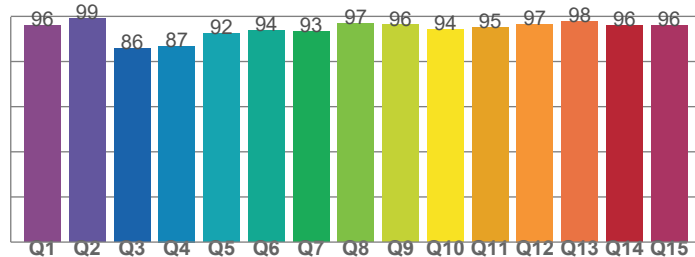

CQS values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8
96,0	99,1	85,7	86,9	92,3	93,7	93,2	97,0
Q9	Q10	Q11	Q12	Q13	Q14	Q15	
96,2	94,2	95,1	96,6	97,7	95,9	96,1	

TM30: 92,0

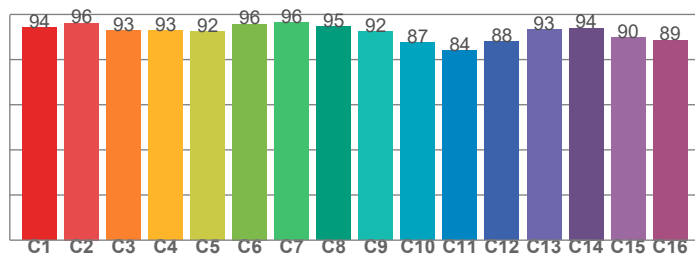

TM30 values, 16 binned values out of total of 99 values

C1	C2	C3	C4	C5	C6	C7	C8
94,3	96,3	92,9	93,0	92,5	95,8	96,3	94,7
C9	C10	C11	C12	C13	C14	C15	
92,5	87,5	84,1	88,1	93,3	94,0	89,9	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3979 K	94,5	84,6	92,0	100,6	93,3	0,383	0,381	0,225	0,336	0,0015



CLS LED BV
 info@cls-led.com
 www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-ZOOM-4000K-CRI90 [WIDE]

TM30 details


Rf 92,0

Fidelity index Rf


Rg 100,6

Gammut index Rg


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	-2%	-1%
2	96	-2%	0%
3	93	-1%	3%
4	93	-1%	2%
5	92	-2%	2%
6	96	2%	1%
7	96	-1%	0%
8	95	-2%	1%
9	92	-3%	5%
10	87	-3%	7%
11	84	2%	11%
12	88	4%	6%
13	93	5%	0%
14	94	4%	0%
15	90	4%	-6%
16	89	2%	-7%

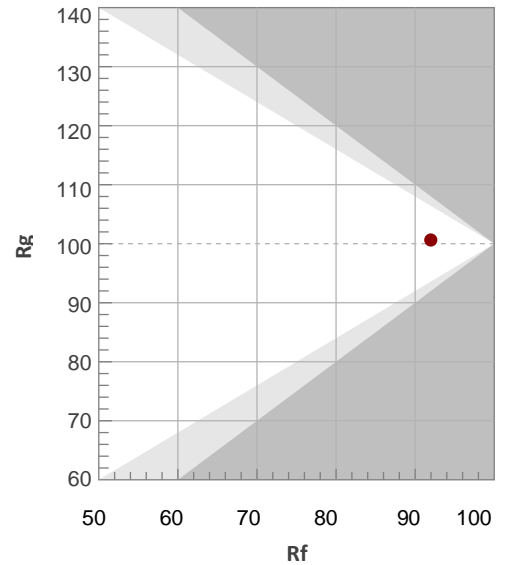


Hue binH

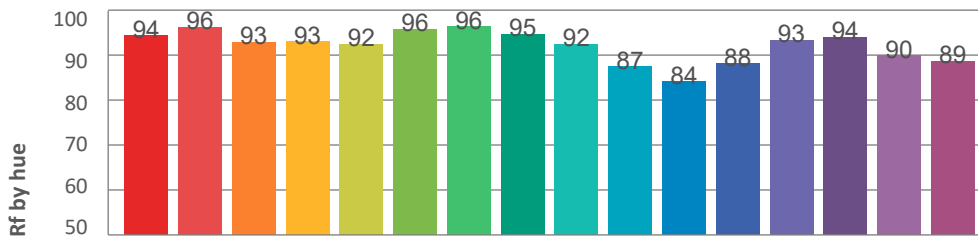

Color vector graphics




Hue bin

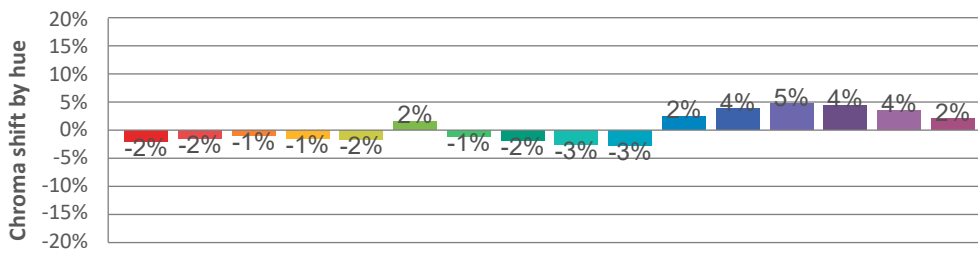

Color distortion graphics



Color Evaluation Sample

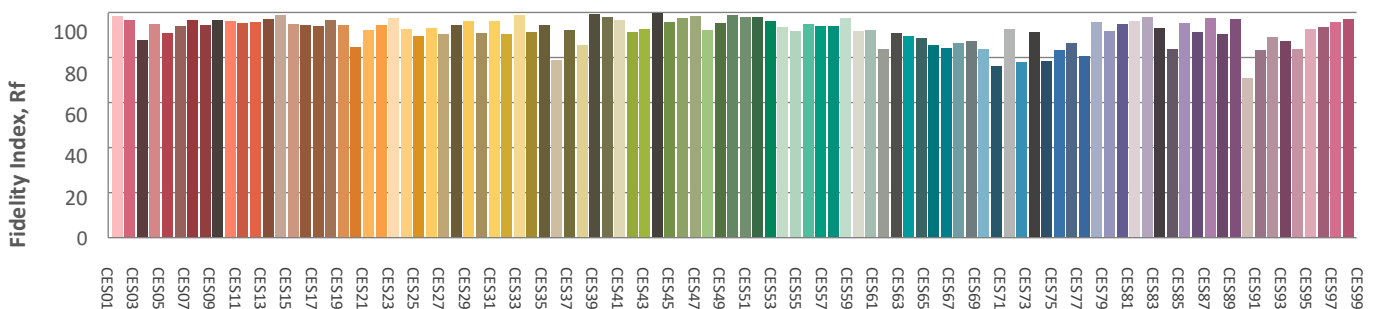

CLS LED BV
info@cls-led.com
www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf

LM-79

Test Report

LM79-TOPAZ-ZOOM-4000K-CRI90 [WIDE]

Glare Evaluation According to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30	
p Walls	50	30	50	30	30	50	30	50	30	30	
p Floor	20	20	20	20	20	20	20	20	20	20	
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	8,1	8,6	8,2	8,8	9,0	8,1	8,6	8,2	8,8	9,0
	3H	7,8	8,5	8,2	8,7	8,9	7,8	8,5	8,2	8,7	8,9
	4H	7,7	8,4	8,1	8,6	8,9	7,7	8,4	8,1	8,6	8,9
	6H	7,7	8,3	8,0	8,6	8,9	7,7	8,3	8,0	8,6	8,9
	8H	7,7	8,2	8,0	8,5	8,9	7,7	8,2	8,0	8,5	8,9
	12H	7,6	8,2	8,0	8,5	8,9	7,6	8,2	8,0	8,5	8,9
4H	2H	7,7	8,4	8,1	8,6	8,8	7,7	8,4	8,1	8,6	8,8
	3H	7,6	8,2	8,0	8,5	8,9	7,6	8,2	8,0	8,5	8,9
	4H	7,5	8,0	7,9	8,4	8,9	7,5	8,0	7,9	8,4	8,9
	6H	7,4	8,0	7,9	8,3	8,6	7,4	8,0	7,9	8,3	8,6
	8H	7,4	7,9	7,9	8,2	8,6	7,4	7,9	7,9	8,2	8,6
	12H	7,3	7,7	7,8	8,1	8,6	7,3	7,7	7,8	8,1	8,6
8H	4H	7,4	7,9	7,9	8,2	8,6	7,4	7,9	7,9	8,2	8,6
	6H	7,3	7,7	7,8	8,1	8,6	7,3	7,7	7,8	8,1	8,6
	8H	7,4	7,6	7,9	8,1	8,7	7,4	7,6	7,9	8,1	8,7
	12H	7,3	7,5	7,9	8,0	8,6	7,3	7,5	7,9	8,0	8,6
12H	4H	7,3	7,7	7,8	8,1	8,6	7,3	7,7	7,8	8,1	8,6
	6H	7,3	7,6	7,9	8,1	8,7	7,3	7,6	7,9	8,1	8,7
	8H	7,3	7,5	7,9	8,0	8,6	7,3	7,5	7,9	8,0	8,6

Variation of the observer position for the luminaire distance S

S = 1.0H	6,3 / -8,5	6,3 / -8,5
S = 1.5H	9,0 / -10,1	9,0 / -10,1
S = 2.0H	11,0 / -10,6	11,0 / -10,6
Standard table	n/a	n/a
Correction summand	n/a	n/a

Corrected glare indices referring to 648lm total luminous flux



CLS LED BV
 info@cls-led.com
 www.cls-led.com

2021 CLS-LED BV. All rights reserved. Information subject to change without notice, CLS-LED BV and all affiliated companies disclaim liability for injury, damage direct or indirect loss, consequential or economic loss or any other loss occasioned by the use of, inability to use or reliance on the information contained in this document. No part of this document may be reproduced, in any form or by any means, without permission in writing from CLS-LED BV. Other legal information can be found in our General conditions, found on the back of your CLS-LED BV invoice, inside the CLS catalogue or on our website www.cls-led.com/voorwaarden.pdf