



Exhibition Grace Kelly, The Netherlands

CLS - Downlighters - Florence GII & GIII series

Main features

EN

With a power consumption of 3 Watts, an energy efficient replacement for 20 Watt halogen light sources.

40% more light output than the previous version.

Extremely compact measurements.

Cree LED inside.

7 different mounting plates available.

Massive aluminium CNC cut housing.

Dimming possible:

1-10V Mains dimmable (Phase cut)

DALI DMX 512 protocol

NL

Met een opgenomen vermogen van slechts 3 Watt geschikt voor vervanging van halogeenlampen tot 20 Watt.

40% meer lichtopbrengst dan de eerdere versie.

Uitermate compacte afmetingen.

Cree LED.


7 verschillende montageplaten verkrijgbaar.

CNC gefreesde massief aluminium behuizing.

Dimbaar op diverse wijzen:

1-10V Mains dimbaar via fase afsnijding

DALI DMX 512 protocol

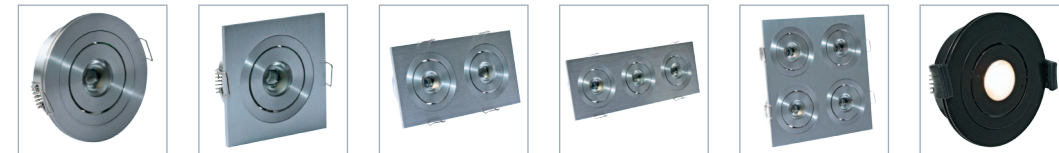

Products Florence GII & GIII series

120200



CLS Florence GII module 40° 1 x Cree warm white 3000K 700mA, size ø 44 x 25 mm [h]

87129060



CLS Florence round ceiling unit alu-brushed 1 hole, size ø 60 x 20 mm [h], cut-out size ø 51 mm

87129070



CLS Florence square ceiling unit alu-brushed 1 hole, size 20 x 60 x 60 mm [hwxwd], cut-out size ø 51 mm

87129080



CLS Florence rectangular ceiling unit alu-brushed 2 holes, size 20 x 112 x 60 mm [hwxwd], cut-out size 101 x 51 mm [wxd]

87129090



CLS Florence rectangular ceiling unit alu-brushed 3 holes, size 20 x 164 x 60 mm [hwxwd], cut-out size 155 x 51 mm [wxd]

87129095



CLS Florence rectangular ceiling unit alu-brushed 4 holes, size 20 x 217 x 60 mm [hwxwd], cut-out size 205 x 51 mm [wxd]

87130002



CLS Florence GIII module 40°, 3000K, 700mA + round ceiling unit, black

