




| | | | |
|--------------------|---|------------------|---|
| Index | 2 | Installation | 4 |
| Safety information | 2 | Lens replacement | 5 |
| Content | 2 | Lens index | 6 |
| Technical | 3 | List of symbols | 7 |
| Specifications | 3 | | |

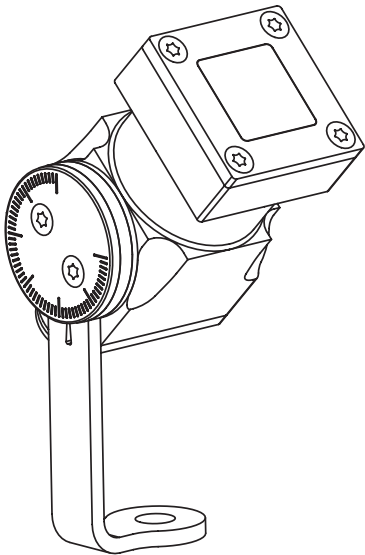


SAFETY INFORMATION




Do not touch the LED surface




No open flames




Do not stare into the LED




Ambiance
Max. 40°




Qualified technician




Disconnect the power supply before installing or maintaining




Make sure all connectors are connected properly




Use a source of AC power that complies local electrical codes




Block access below the work area when maintaining the unit



Don't modify or install genuine parts on this product





Don't install in a flammable or explosive area





Warning! Some surfaces can be hot

CONTENT

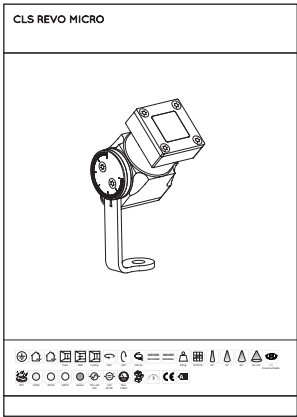





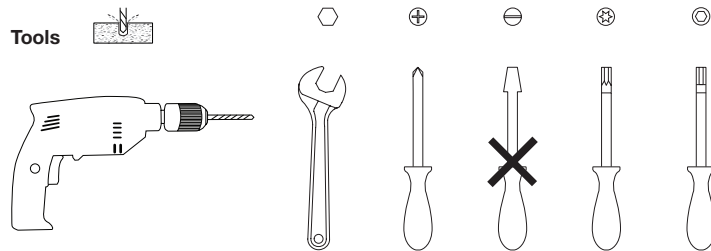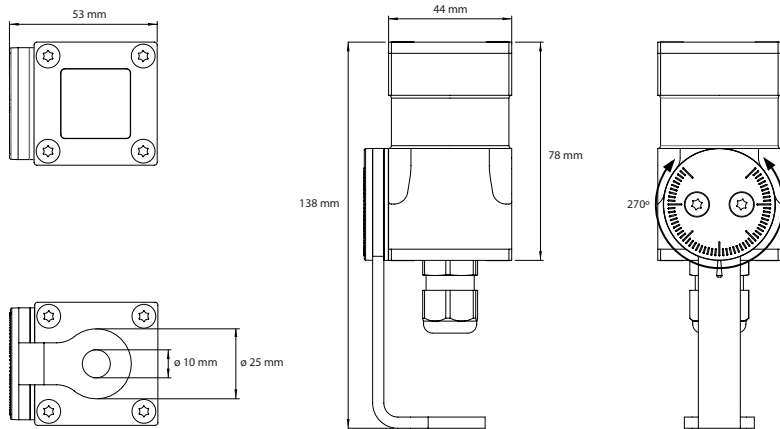


SPECIFICATIONS

LED: 1 x High Power LED
 Available colours: 2700K, 3000K, 4000K or amber
 Lenses: 20°, 30°, 66° and 20x42°
 Power supply: 100 ~ 240 VAC or 24V AC/DC
 Power consumption: Max. 5 Watt
 Swivel: 360° horizontal, 360° vertical
 Housing: Anodised aluminum
 Weight: 340 gr
 IP value: IP67
 Cable length: 2 meters
 Measurements: 138 x 53 x 44 mm (h x w x d)
 Ambient temperature: -20° C till +50° C











ACCESSORIES

871992 CLS mold set, straight 8-26mm
 871995 CLS mold set Paguro grey

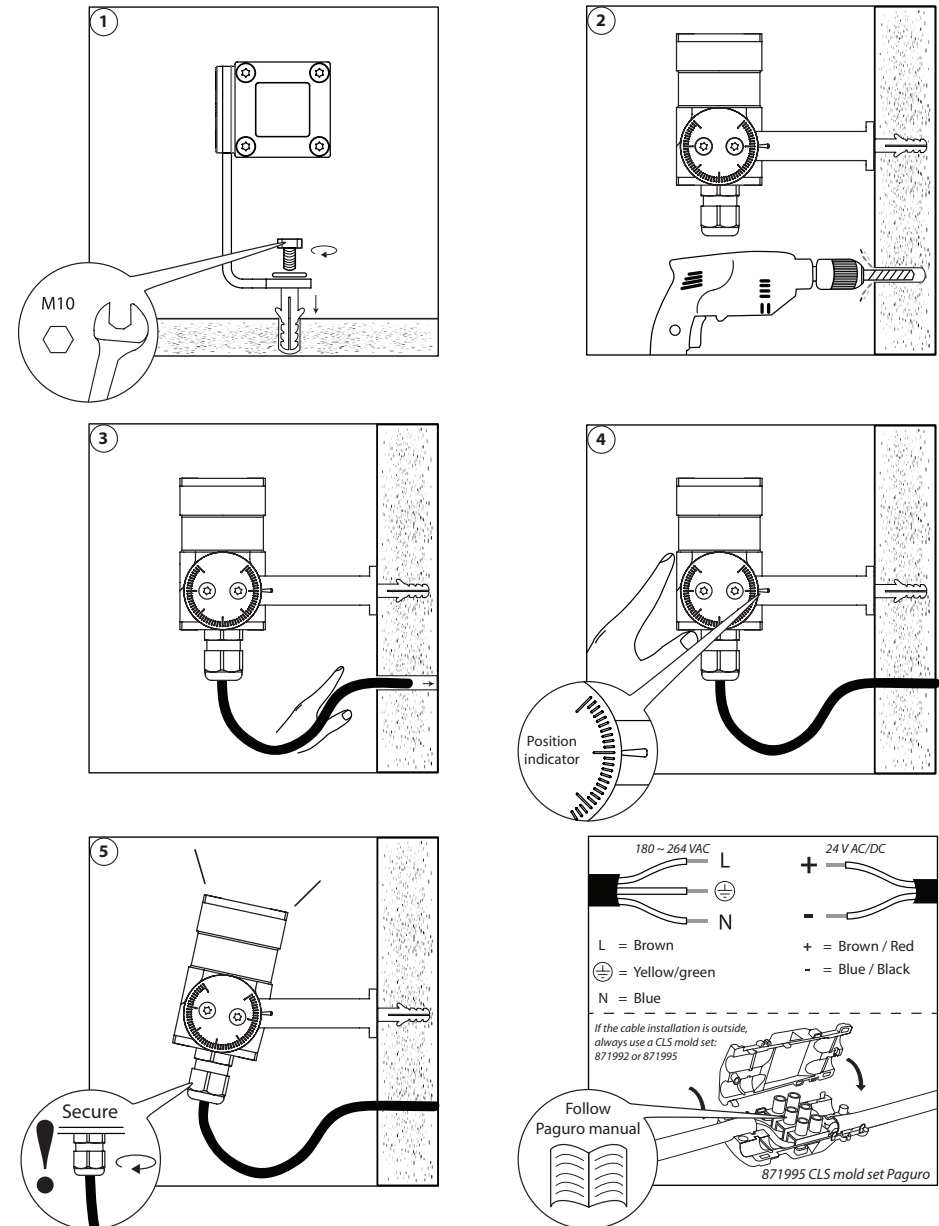

LENS REPLACEMENT

LENS INDEX

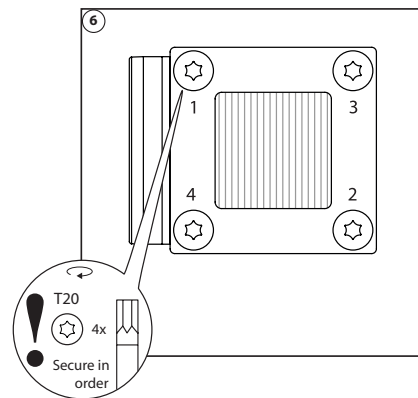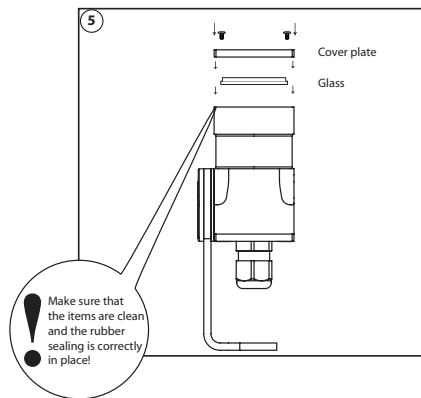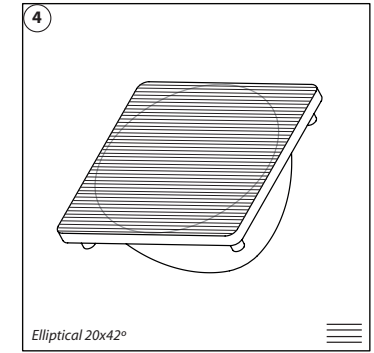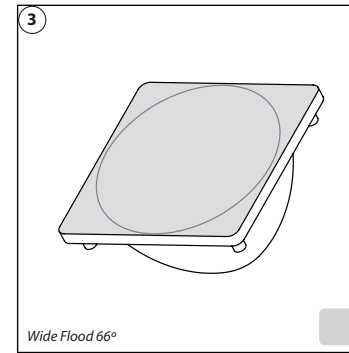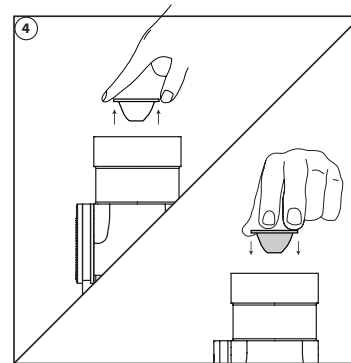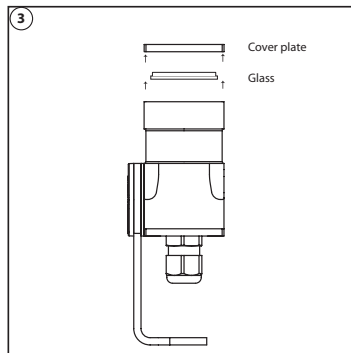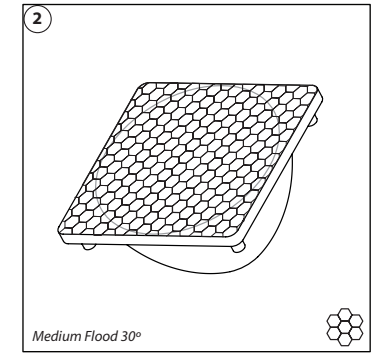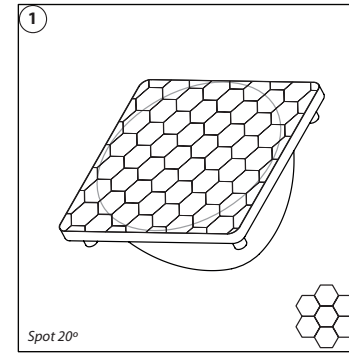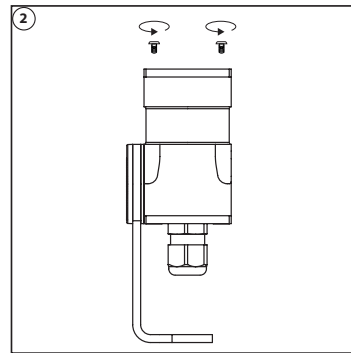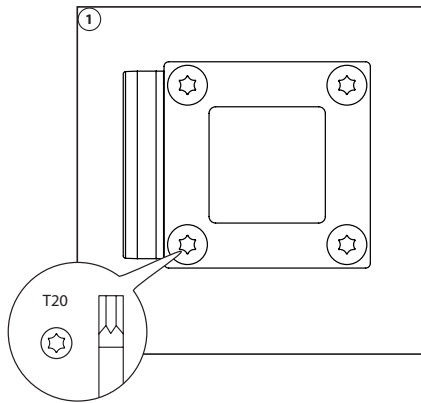


LIST OF SYMBOLS



Protection class
One, two or three



Application area
Indoor or outdoor



Application area
Floor, wall or ceiling



Swivel
Fixture is horizontally rotatable, indicated in degrees



Swivel
Fixture is vertically rotatable, indicated in degrees



Multiple connection
Daisychain connectivity



Installation depth
In centimeters



Installation size
In centimeters



Cable length
Maximum cable attached to the fixture in centimeters



Driver
Inclusive or exclusive internal or external



Weight
In grams/kilograms



Pressure
Maximum pressure on the fixture in kg/cm²



Lifespan
Of the light source in hours



Lenses
Available lenses, indicated in degrees



Performance Zoom
Adjustable beam angle



LEDs
Kind of LED used in the fixture



Plug & play
Easy connection using the SmartConnect system



IP value
Ingress Protection classifies the degrees of protection provided against the intrusion of the product



Colour changing
RGB, RGB-W, RGB-A, AWB or Tunable White



Colour changing
RGB, RGB-W, RGB-A, AWB or Tunable White



Retail & Food LED modules
Clothing, furniture, kitchens, jewellery, shoes, bread, meat, fish and vegetables & fruit.



Colour
Available colours: Amber, blue, red or green



White colour temperature
In different Kelvin values: Cold white, neutral white, warm white or extra warm white



Curve
Minimal bending curve in centimeters



Cutting length
Indicated by the cutting marks



LED pitch
Pitch between the LEDs in millimeters



Power supply
In VDC, VAC or milliAmpere



Power consumption
In VA or Watt



Dimmable
1-10 Volt, Phase, individual, DMX dimmable or DALI



PWM dimming
Traditional PWM dimming, DMX analog or DMX Hybrid dim



Bluetooth controlled
By Casambi



Magne dimming
Accurate dimming from 100 - 1% by using a magnet



Dynamic Control
Dynamic Power Control or Dynamic Temperature Control



DMX input
Fixture works on DMX512 protocol or Wireless DMX



Combined product
Compose your own fixture



Warranty
3 or 5 years warranty on the product



Conformité Européenne
CE marking for free marketability of industrial goods within the EU



Energy label



Lightsource
Equipped with a CLS, Bridgelux or a Xicato LED module